



Zoni®

Next-generation switches

The new champion of your projects, excelling in versatility.

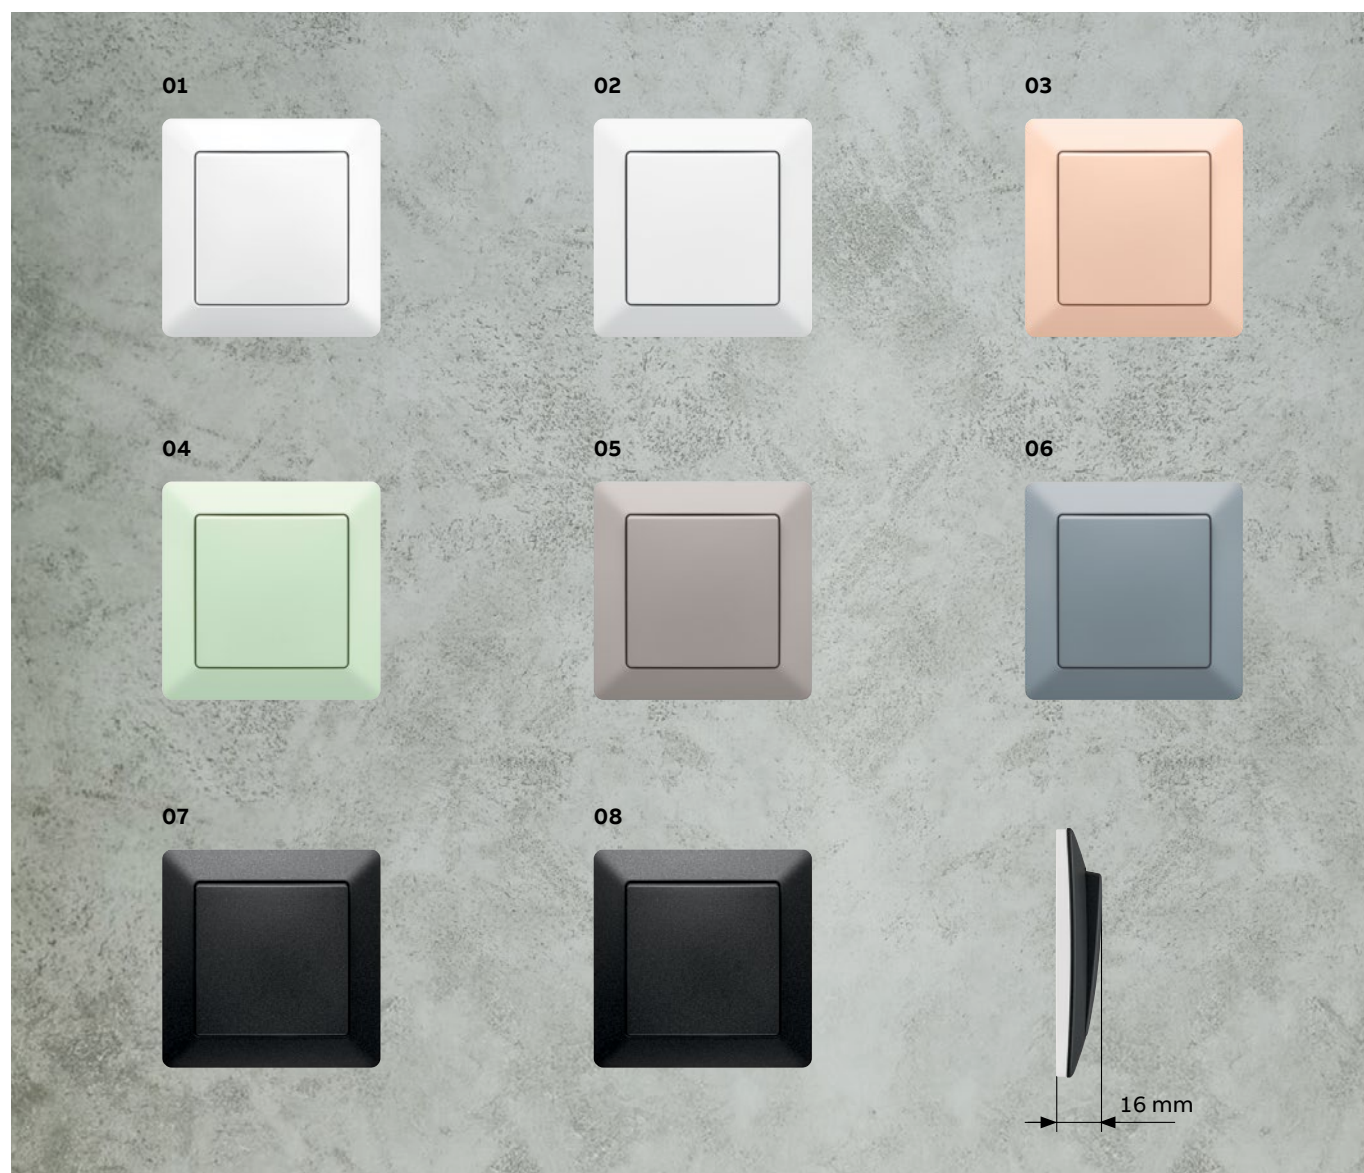


- Modern switches with app and Bluetooth control
- Brand new shape, trendy with new colors – all switches in matt finish
- Two-tone frames
- New sockets, safer than ever
- Designed and manufactured in Czech Republic


Zoni®

Matt and elegant

Precise in every detail with natural shape. Switches and sockets you will love.



- 01 white
- 02 white matt
- 03 nude
- 04 olive


- 05 greige
- 06 grey
- 07 black matt
- 08 black matt/ white

- Modern switches with app and Bluetooth control
- Brand new shape, trendy with new colours – all. switches in matt finish
- Two-tone frames
- New sockets, safer then ever
- Designed and manufactured in the Czech Republic




Zoni®

Standard inserts


The new generation of ABB flexTronics® switches underlines the comprehensiveness of our offer. Our wide range brings all you need for modern and high-quality wiring in family and apartment buildings.

switch /
push-switchswitch / push-switch
/ with orientation or
signalization LEDswitch / push-switch
with label fields

2-pole/3-pole switch

serial switch /
intermediate switch


3gang switch

card switch with
orientation LEDdimmer with rotary
control elementpush-button
dimmer


timer




movement sensor



blind switch



touch blind switch

comfort blind switch
with timerFriends of Hue
smart switch *thermostat with
rotary controluniversal
programmable
thermostat,
with floating coverair quality
sensorantenna socket
TV+R / TV+R+SATspeaker socket
for stereo
connectioncommunication
socket USB / VGA
/ HDMI

USB charger

coms socket with
angled outletRadio DAB+ and FM
with Bluetooth

Radio DAB+ and FM




Radio iNet




speaker



orientation light

orientation light with
movement sensor

cable outlet



Blank plate

central vacuum
cleaner
socket

socket

socket with USB
chargersocket with
overvoltage
protection

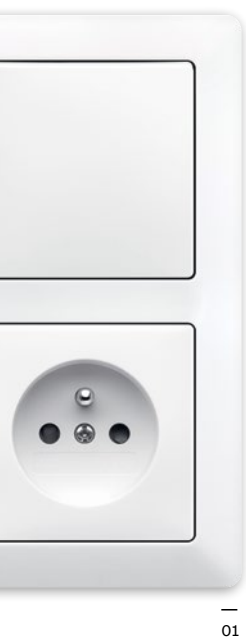
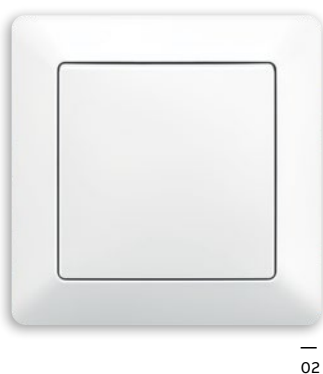
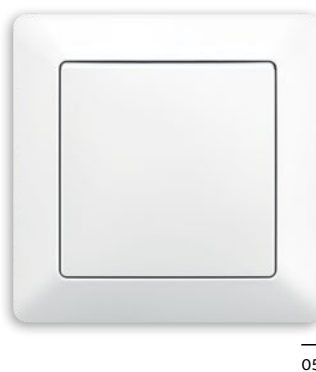
socket with RCD

double socket
with turned
upper cavitydouble socket
with overvoltage
protection1 to 5 gang frame
for horizontal and
vertical installation

* Set Friends of Hue smart switch available only in white color.



- 01 white
switch + socket
- 02 white
- 03 black matt/ white
- 04 black matt
- 05 matt white

—
01—
02—
03—
04—
05

— Play the game of lights and shadows

If you like contrast,
you can freely combine.
Not just black and white in form
of two-layer frames, but
even glossy and matte surfaces.



Matt colour is universal, just like black and white. It looks the same regardless of lighting conditions, no fingerprints remain on the surface

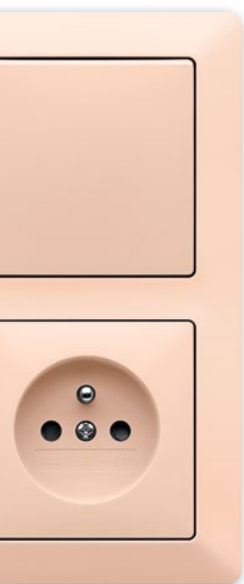
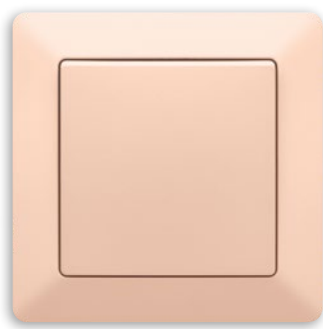
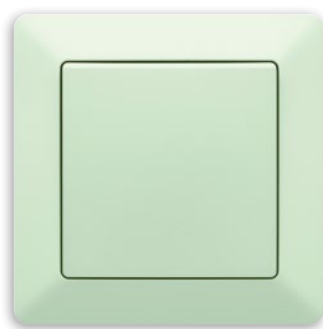
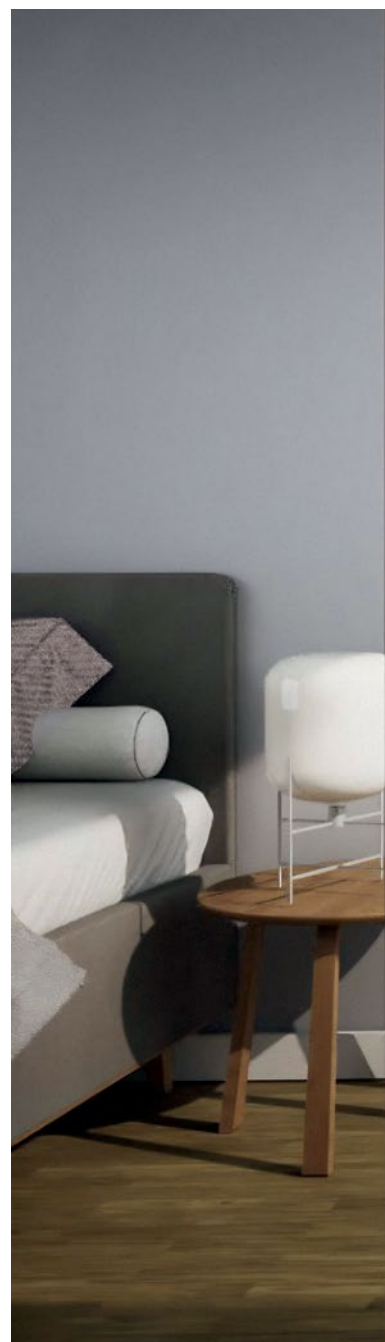





Zoni®

Trendy colours

Soft earthy colours inspired by nature allow switches and sockets to blend in wall shades, tone in tone, or to stand out on clean white walls as a striking addition to the interior.

—
01—
02—
03

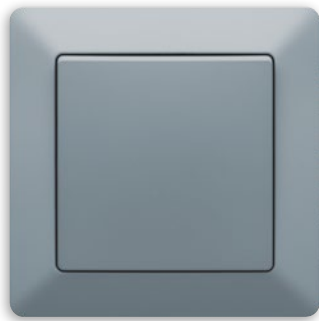—
04—
05

- 01 nude
switch + socket
- 02 nude
- 03 olive
- 04 greige
- 05 grey



Zoni®

Rocker switches / push switches

Rocker Switch Mechanism



Rated voltage: 250 V AC, Rated current: 10 AX, Screwless terminals, With optional illumination. Fixation via screws if mentioned in text below also claws available.

	Type	Order code	Pack/Qty.
1gang 1way	3559-A01345	2CHX590135A4000	20
1gang 1way, claws	3559-A01445	2CHX590145A4000	20
1gang 1way, with N terminal	3559-A21345	2CHX592135A4000	20
1gang 1way, with N terminal, claws	3559-A21445	2CHX592145A4000	20
1gang 2way	3559-A06345	2CHX590635A4000	20
1gang 2way, claws	3559-A06445	2CHX590645A4000	20
1gang 2way switch insert with N terminal	3559-A25345	2CHX592535A4000	20
1gang 2way switch insert with N terminal, claws	3559-A25445	2CHX592545A4000	20
Intermediate switch insert	3559-A07345	2CHX590735A4000	20
Intermediate switch insert, claws	3559-A07445	2CHX590745A4000	20
DP 1gang 1way	3559-A02345	2CHX590235A4000	20
DP 1gang 1way, claws	3559-A02445	2CHX590245A4000	20

Rocker Switch Mechanism



Rated voltage: 250 V AC, Rated current: 10 AX, Screwless terminals, Fixation via screws if mentioned in text below also claws available.

	Type	Order code	Pack/Qty.
2gang 1way	3559-A05345	2CHX590535A4000	20
2gang 1way, claws	3559-A05445	2CHX590545A4000	20

Rocker push-switch mechanism



Rated voltage: 250 V AC, Rated current: 10 A, Screwless terminals, With optional illumination. Fixation via screws if mentioned in text below also claws available.

	Type	Order code	Pack/Qty.
2gang 1way	3559-A87345	2CHX598735A4000	20
2gang 1way, claws	3559-A87445	2CHX598745A4000	20

Rocker push-switch mechanism



Rated voltage: 250 V AC, Rated current: 10 A, Screwless terminals, With optional illumination. Fixation via screws if mentioned in text below also claws available.

	Type	Order code	Pack/Qty.
1gang 1way, with N terminal	3559-A91345	2CHX599135A4000	20
1gang 1way, with N terminal, claws	3559-A91445	2CHX599145A4000	20
1gang 2way with N terminal	3559-A86345	2CHX598635A4000	20
1gang 2way, with N terminal, claws	3559-A86445	2CHX598645A4000	20

Rocker switch mechanism



Rated voltage: 250 V AC, Rated current: 10 AX, Screwless terminals, Fixation via screws if mentioned in text below also claws available.

	Type	Order code	Pack/Qty.
2gang 2way	3559-A52345	2CHX595235A4000	20
2gang 2way, claws	3559-A52445	2CHX595245A4000	20

Rocker switch/push-switch mechanism combination



Rated voltage: 250 V AC, Rated current: 10 A, Screwless terminals, Fixation via screws if mentioned in text below also claws available.

	Type	Order code	Pack/Qty.
2gang 2way	3559-A53345	2CHX595335A4000	20
2gang 2way, claws	3559-A53445	2CHX595345A4000	20

Rocker switch mechanism 3pole



	Type	Order code	Pack/Qty.
1 gang 1way, 3-pole	1011-0-0816CZ	2CHP041011A0816	10

Rocker Switch Mechanism



Rated voltage: 250 V AC, Rated current: 16 A, Screwless terminals, Fixation via screws or claws.

	Type	Order code	Pack/Qty.
3gang 1way, SP, claws	10631UBSC	2TKA000153G1	10

Zoni®

Switches

Card switch mechanism



The contact will close once a card 54 × 86 mm is inserted into the cover slot.
Rated voltage: 250 V AC, Rated current: 10 A, Screwless terminals, Fixation via screws or claws. Suitable for use with orientation neon lamps 3916-xxx

	Type	Order code	Pack/Qty.
1gang 1way, with N terminal, claws	3559T-A92445	2CHX599245A4000	10

Rocker



Colour	Type	Order code	Pack/Qty.
white	3559T-A00651 500	2CHT590651A4500	20
black matt	3559T-A00651 237	2CHT590651A4237	20
white matt	3559T-A00651 240	2CHT590651A4240	20
grey	3559T-A00651 241	2CHT590651A4241	20
nude	3559T-A00651 242	2CHT590651A4242	20
olive	3559T-A00651 243	2CHT590651A4243	20
greige	3559T-A00651 244	2CHT590651A4244	20

Rocker with transparent lens




Colour	Type	Order code	Pack/Qty.
white	3559T-A00653 500	2CHT590653A4500	20
black matt	3559T-A00653 237	2CHT590653A4237	20
white matt	3559T-A00653 240	2CHT590653A4240	20
grey	3559T-A00653 241	2CHT590653A4241	20
nude	3559T-A00653 242	2CHT590653A4242	20
olive	3559T-A00653 243	2CHT590653A4243	20
greige	3559T-A00653 244	2CHT590653A4244	20

Rocker with printing I/O



Colour	Type	Order code	Pack/Qty.
white	3559T-A00655 500	2CHT590655A4500	20
black matt	3559T-A00655 237	2CHT590655A4237	20
white matt	3559T-A00655 240	2CHT590655A4240	20
grey	3559T-A00655 241	2CHT590655A4241	20
nude	3559T-A00655 242	2CHT590655A4242	20
olive	3559T-A00655 243	2CHT590655A4243	20
greige	3559T-A00655 244	2CHT590655A4244	20

Rocker with label field



Colour	Type	Order code	Pack/Qty.
white	3559T-A00610 500	2CHT590610A4500	20
black matt	3559T-A00610 237	2CHT590610A4237	20
white matt	3559T-A00610 240	2CHT590610A4240	20
grey	3559T-A00610 241	2CHT590610A4241	20
nude	3559T-A00610 242	2CHT590610A4242	20
olive	3559T-A00610 243	2CHT590610A4243	20
greige	3559T-A00610 244	2CHT590610A4244	20

Label field for rocker with bell symbol



Colour	Type	Order code	Pack/Qty.
Transparent	3559T-A00271	2CHT590271A4000	20
Transparent	3559T-A00272	2CHT590272A4000	20



Rocker switches / push switches

Rocker divided




Colour	Type	Order code	Pack/Qty.
white	3559T-A00652 500	2CHT590652A4500	20
black matt	3559T-A00652 237	2CHT590652A4237	20
white matt	3559T-A00652 240	2CHT590652A4240	20
grey	3559T-A00652 241	2CHT590652A4241	20
nude	3559T-A00652 242	2CHT590652A4242	20
olive	3559T-A00652 243	2CHT590652A4243	20
greige	3559T-A00652 244	2CHT590652A4244	20

Blind switch rocker with markings



Colour	Type	Order code	Pack/Qty.
white	3559T-A00662 500	2CHT590662A4500	20
black matt	3559T-A00662 237	2CHT590662A4237	20
white matt	3559T-A00662 240	2CHT590662A4240	20
grey	3559T-A00662 241	2CHT590662A4241	20
nude	3559T-A00662 242	2CHT590662A4242	20
olive	3559T-A00662 243	2CHT590662A4243	20
greige	3559T-A00662 244	2CHT590662A4244	20

Rocker for 3pole switch with markings




Colour	Type	Order code	Pack/Qty.
white	3559T-A00933 500	2CHT590933A4500	20
black matt	3559T-A00933 237	2CHT590933A4237	20
white matt	3559T-A00933 240	2CHT590933A4240	20
grey	3559T-A00933 241	2CHT590933A4241	20
nude	3559T-A00933 242	2CHT590933A4242	20
olive	3559T-A00933 243	2CHT590933A4243	20
greige	3559T-A00933 244	2CHT590933A4244	20

Rocker for 3gang 1way switch, SP



Colour	Type	Order code	Pack/Qty.
white	3559T-A00666 500	2CHT590666A4500	20
black matt	3559T-A00666 237	2CHT590666A4237	20
white matt	3559T-A00666 240	2CHT590666A4240	20
grey	3559T-A00666 241	2CHT590666A4241	20
nude	3559T-A00666 242	2CHT590666A4242	20
olive	3559T-A00666 243	2CHT590666A4243	20
greige	3559T-A00666 244	2CHT590666A4244	20

Cover plate for card switch



Colour	Type	Order code	Pack/Qty.
white	3559T-A00700 500	2CHT590700A4500	#N/D
black matt	3559T-A00700 237	2CHT590700A4237	#N/D
white matt	3559T-A00700 240	2CHT590700A4240	#N/D
grey	3559T-A00700 241	2CHT590700A4241	#N/D
nude	3559T-A00700 242	2CHT590700A4242	#N/D
olive	3559T-A00700 243	2CHT590700A4243	#N/D
greige	3559T-A00700 244	2CHT590700A4244	#N/D

Switch with rocker, 2 gang 1 way, IP44



Colour	Type	Order code	Pack/Qty.
white	3559T-A05940 500	2CHT590594A6500	10
black matt	3559T-A05940 237	2CHT590594A6237	10
white matt	3559T-A05940 240	2CHT590594A6240	10
grey	3559T-A05940 241	2CHT590594A6241	10
nude	3559T-A05940 242	2CHT590594A6242	10
olive	3559T-A05940 243	2CHT590594A6243	10
greige	3559T-A05940 244	2CHT590594A6244	10

Zoni® Switches

Switch with rocker, 1 gang 2 way, IP44



Colour	Type	Order code	Pack/Qty.
white	3559T-A06940 500	2CHT590694A6500	10
black matt	3559T-A06940 237	2CHT590694A6237	10
white matt	3559T-A06940 240	2CHT590694A6240	10
grey	3559T-A06940 241	2CHT590694A6241	10
nude	3559T-A06940 242	2CHT590694A6242	10
olive	3559T-A06940 243	2CHT590694A6243	10
greige	3559T-A06940 244	2CHT590694A6244	10

Switch with rocker, intermediate, IP44



Colour	Type	Order code	Pack/Qty.
white	3559T-A07940 500	2CHT590794A6500	10
black matt	3559T-A07940 237	2CHT590794A6237	10
white matt	3559T-A07940 240	2CHT590794A6240	10
grey	3559T-A07940 241	2CHT590794A6241	10
nude	3559T-A07940 242	2CHT590794A6242	10
olive	3559T-A07940 243	2CHT590794A6243	10
greige	3559T-A07940 244	2CHT590794A6244	10

Switch with rocker, 2gang 2way, IP44




Colour	Type	Order code	Pack/Qty.
white	3559T-A52940 500	2CHT595294A6500	10
black matt	3559T-A52940 237	2CHT595294A6237	10
white matt	3559T-A52940 240	2CHT595294A6240	10
grey	3559T-A52940 241	2CHT595294A6241	10
nude	3559T-A52940 242	2CHT595294A6242	10
olive	3559T-A52940 243	2CHT595294A6243	10
greige	3559T-A52940 244	2CHT595294A6244	10

Blind switch with rocker, 2gang 1way, IP44



Colour	Type	Order code	Pack/Qty.
white	3559T-A88940 500	2CHT598894A6500	10
black matt	3559T-A88940 237	2CHT598894A6237	10
white matt	3559T-A88940 240	2CHT598894A6240	10
grey	3559T-A88940 241	2CHT598894A6241	10
nude	3559T-A88940 242	2CHT598894A6242	10
olive	3559T-A88940 243	2CHT598894A6243	10
greige	3559T-A88940 244	2CHT598894A6244	10

Comprising Friends of Hue smart switch insert



Consisting of Friends of Hue smart switch insert 6716 U-500. Comprising 2gang rocker 6221T-xx for Friends of Hue smart switch. Consisting of 1gang Zoni cover frames. Comprising fixing plate and intermediate ring. Smarter light switches for wireless remote control of Philips Hue lamps. For switching and dimming of Philips Hue lamps. For saving, calling up and dimming of a maximum of 2 individual light scenes. Without battery and maintenance-free due to >Energy harvesting<. Can be mounted freely in the room with the enclosed adhesive tape and fixing plate. Requires Philips Hue Bridge (2nd generation square construction type) and Philips Hue app (Version 3.2 or higher). Maximum safety of function by means of Zigbee-Mesh technology. Can be mounted freely in the room with the enclosed adhesive tape and fixing plate. Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
white	6221T-C01000 500	2CHT621000C4500	1

Zoni®

Rocker switches / push switches

Control element for smart switch 2gang



Colour	Type	Order code	Pack/Qty.
white	6221T-A01010 500	2CHT621010A4500	5
black matt	6221T-A01010 237	2CHT621010A4237	5
white matt	6221T-A01010 240	2CHT621010A4240	5
grey	6221T-A01010 241	2CHT621010A4241	5
nude	6221T-A01010 242	2CHT621010A4242	5
olive	6221T-A01010 243	2CHT621010A4243	5
greige	6221T-A01010 244	2CHT621010A4244	5

Friends of Hue smart switch insert



Wall-mounted transmitter, 2/4 channel. Smarter light switches for wireless remote control of Philips Hue lamps. For switching and dimming of Philips Hue lamps. For saving, calling up and dimming of a maximum of 2 individual light scenes. Without battery and maintenance-free due to >Energy harvesting<. Can be mounted freely in the room with the enclosed adhesive tape and fixing plate. Requires Philips Hue Bridge (2nd generation square construction type) and Philips Hue app (Version 3.2 or higher). Maximum safety of function by means of Zigbee-Mesh technology. Combinable with the Busch-Jaeger switch range Buschbalance®SI. Can be mounted freely in the room with the enclosed adhesive tape and fixing plate. Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
	6716/01 U-500	2CKA006710A0031	1

Zoni®

Sockets outlets

Single socket with pin, shutters



Colour	Type	Order code	Pack/Qty.
white	6619T-A06657 500	2CHT196657A4500	10
black matt	6619T-A06657 237	2CHT196657A4237	10
white matt	6619T-A06657 240	2CHT196657A4240	10
grey	6619T-A06657 241	2CHT196657A4241	10
nude	6619T-A06657 242	2CHT196657A4242	10
olive	6619T-A06657 243	2CHT196657A4243	10
greige	6619T-A06657 244	2CHT196657A4244	10

Socket outlet with earthing pin, IP44, shuttered, with cover



Colour	Type	Order code	Pack/Qty.
white	6619T-A06995 500	2CHT196995A6500	10
black matt	6619T-A06995 237	2CHT196995A6237	10
white matt	6619T-A06995 240	2CHT196995A6240	10
grey	6619T-A06995 241	2CHT196995A6241	10
nude	6619T-A06995 242	2CHT196995A6242	10
olive	6619T-A06995 243	2CHT196995A6243	10
greige	6619T-A06995 244	2CHT196995A6244	10

SCHUKO socket outlet, shuttered



Colour	Type	Order code	Pack/Qty.
white	6620T-A07657 500	2CHT207657A4500	10
black matt	6620T-A07657 237	2CHT207657A4237	10
white matt	6620T-A07657 240	2CHT207657A4240	10
grey	6620T-A07657 241	2CHT207657A4241	10
nude	6620T-A07657 242	2CHT207657A4242	10
olive	6620T-A07657 243	2CHT207657A4243	10
greige	6620T-A07657 244	2CHT207657A4244	10


Zoni®

Sockets outlets

Shuko socket outlet, without shutters

Colour	Type	Order code	Pack/Qty.
white	6620T-A08337 500	2CHT208337A4500	10
black matt	6620T-A08337 237	2CHT208337A4237	10
white matt	6620T-A08337 240	2CHT208337A4240	10
grey	6620T-A08337 241	2CHT208337A4241	10
nude	6620T-A08337 242	2CHT208337A4242	10
olive	6620T-A08337 243	2CHT208337A4243	10
greige	6620T-A08337 244	2CHT208337A4244	10

SCHUKO socket outlet, IP44, shuttered

Colour	Type	Order code	Pack/Qty.
white	6620T-A07995 500	2CHT207995A6500	10
black matt	6620T-A07995 237	2CHT207995A6237	10
white matt	6620T-A07995 240	2CHT207995A6240	10
grey	6620T-A07995 241	2CHT207995A6241	10
nude	6620T-A07995 242	2CHT207995A6242	10
olive	6620T-A07995 243	2CHT207995A6243	10
greige	6620T-A07995 244	2CHT207995A6244	10

Double socket with pin, shutters

Colour	Type	Order code	Pack/Qty.
white	5513T-C02357 500	2CHT132357C4500	10
white matt	5513T-C02357 137	2CHT132357C4137	10
black matt	5513T-C02357 237	2CHT132357C4237	10
black matt / white	5513T-C02357 240	2CHT132357C4240	10
grey	5513T-C02357 141	2CHT132357C4141	10
nude	5513T-C02357 142	2CHT132357C4142	10
olive	5513T-C02357 143	2CHT132357C4143	10
greige	5513T-C02357 144	2CHT132357C4144	10

Single socket with overvoltage protection

Colour	Type	Order code	Pack/Qty.
white	6699T-A06657 500	2CHT966657A4500	1
black matt	6699T-A06657 237	2CHT966657A4237	1
white matt	6699T-A06657 240	2CHT966657A4240	1
grey	6699T-A06657 241	2CHT966657A4241	1
nude	6699T-A06657 242	2CHT966657A4242	1
olive	6699T-A06657 243	2CHT966657A4243	1
greige	6699T-A06657 244	2CHT966657A4244	1

Double socket with overvoltage protection

Colour	Type	Order code	Pack/Qty.
white	5593T-C02357 500	2CHT922357C4500	1
white matt	5593T-C02357 240	2CHT922357C4240	1
black matt	5593T-C02357 237	2CHT922357C4237	1
black matt / white	5593T-C02357 137	2CHT922357C4137	1
grey	5593T-C02357 141	2CHT922357C4141	1
nude	5593T-C02357 142	2CHT922357C4142	1
olive	5593T-C02357 143	2CHT922357C4143	1
greige	5593T-C02357 144	2CHT922357C4144	1

Socket outlet with earthing pin, shuttered, with USB charging

Colour	Type	Order code	Pack/Qty.
white	5569T-A32357 500	2CHT693257A4500	#N/D
black matt	5569T-A32357 237	2CHT693257A4237	#N/D
white matt	5569T-A32357 240	2CHT693257A4240	#N/D
grey	5569T-A32357 241	2CHT693257A4241	#N/D
nude	5569T-A32357 242	2CHT693257A4242	#N/D
olive	5569T-A32357 243	2CHT693257A4243	#N/D
greige	5569T-A32357 244	2CHT693257A4244	#N/D



Telecommunications systems / multimedia

TV-R / TV-R-SAT socket outlet cover plate



Colour	Type	Order code	Pack/Qty.
white	5011T-A00300 500	2CHT080300A4500	10
black matt	5011T-A00300 237	2CHT080300A4237	10
white matt	5011T-A00300 240	2CHT080300A4240	10
grey	5011T-A00300 241	2CHT080300A4241	10
nude	5011T-A00300 242	2CHT080300A4242	10
olive	5011T-A00300 243	2CHT080300A4243	10
greige	5011T-A00300 244	2CHT080300A4244	10

Radio/TV socket outlet insert



Nominal impedance of inputs and outputs: 75 Ω
For coaxial cables with a diameter of 3.6 to 6.8 mm.
Fixation via screws or claws.

	Type	Order code	Pack/Qty.
terminal type	5011-A3503	2CHU083503A4000	1
loop-through type with 7 dB tap loss	5011-A3607	2CHU083607A4000	1
loop-through type with 14 dB tap loss	5011-A3614	2CHU083614A4000	1

Radio/TV/SAT socket outlet insert



Allows passage of a current of 500 mA DC and 22 kHz tone signal for LNB power supply and control.
Nominal impedance of inputs and outputs: 75 Ω
For coaxial cables with a diameter of 3.6 to 6.8 mm.
Fixation via screws or claws.

	Type	Order code	Pack/Qty.
terminal type	5011-A3303	2CHU083303A4000	1

Cover plate for communication inserts



Colour	Type	Order code	Pack/Qty.
white	5014T-A00418 500	2CHT290418A4500	10
black matt	5014T-A00418 237	2CHT290418A4237	10
white matt	5014T-A00418 240	2CHT290418A4240	10
grey	5014T-A00418 241	2CHT290418A4241	10
nude	5014T-A00418 242	2CHT290418A4242	10
olive	5014T-A00418 243	2CHT290418A4243	10
greige	5014T-A00418 244	2CHT290418A4244	10

Cable outlet



Colour	Type	Order code	Pack/Qty.
white	3938T-A00034 500	2CHT480034A4500	5
black matt	3938T-A00034 237	2CHT480034A4237	5
white matt	3938T-A00034 240	2CHT480034A4240	5
grey	3938T-A00034 241	2CHT480034A4241	5
nude	3938T-A00034 242	2CHT480034A4242	5
olive	3938T-A00034 243	2CHT480034A4243	5
greige	3938T-A00034 244	2CHT480034A4244	5

Blank plate



Colour	Type	Order code	Pack/Qty.
white	3902T-A00001 500	2CHT050001A4500	10
black matt	3902T-A00001 237	2CHT050001A4237	10
white matt	3902T-A00001 240	2CHT050001A4240	10
grey	3902T-A00001 241	2CHT050001A4241	10
nude	3902T-A00001 242	2CHT050001A4242	10
olive	3902T-A00001 243	2CHT050001A4243	10
greige	3902T-A00001 244	2CHT050001A4244	10

Zoni®

Telecommunications systems / multimedia


Cover plate for USB / HDMI / VGA / stereo connection unit

Colour	Type	Order code	Pack/Qty.
white	5014T-A00040 500	2CHT290040A4500	10
black matt	5014T-A00040 237	2CHT290040A4237	10
white matt	5014T-A00040 240	2CHT290040A4240	10
grey	5014T-A00040 241	2CHT290040A4241	10
nude	5014T-A00040 242	2CHT290040A4242	10
olive	5014T-A00040 243	2CHT290040A4243	10
greige	5014T-A00040 244	2CHT290040A4244	10

USB power adapter insert, flush-mounted ¹⁾ ²⁾ ³⁾ with USB-A & USB-C interface


For supply and support of mobile devices via USB-cable. With USB type A and USB type C female connector. To support two devices at the same time. Supports automatic negotiating of optimum charging parameters for the shortest charging times. Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A. Support of the additional quick-charge protocols: USB-PD and quick-charge 3.0 & 4.0. With electronic short-circuit protection. With electronic overload protection. Rated voltage: 220 - 230 V AC. Rated frequency: 50 Hz - 60 Hz. Outputs: 2x USB charging interface. Suitable for: Only USB-A bus occupied: Rated current: 3000 mA. Output voltage: 5 V-. Suitable for: Only USB-C bus occupied: Rated power: 18 W. Suitable for: USB-A and USB-C bus occupied. Total: Rated current: 3250 mA. Output voltage: 5 V-. Protection class (Device): IP 20, SELV. Temperature range (Device): 0 °C to 35 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 43 mm. Mounting depth: 32 mm.

Colour	Type	Order code	Pack/Qty.
	6475 U-500	2CKA006400A0399	1

¹⁾ No claw. Screw-fixing via keyholes.²⁾ No data transfer.³⁾ When cleaning the device, use dust cover 2098 for the USB-A connection.**HDMI connection unit ¹⁾ with screw-type terminals and strain relief**

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx. To link high-definition digital audio and video data from e.g. SAT-receiver, DVD-/Blue-Ray-player to plasma-type, LCD- or LED-TVs/screens. HDMI-type A, 3D-compatible. Fully HD ready (1920 x 1080 pixel). For 20-wire HDMI-cables via screw-type terminals. For trunk systems, flush-mounted wall boxes and underfloor systems. For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended. Without cover plate. Without claws. Protection class (Device): IP 20. Mounting depth: 34 mm.

Colour	Type	Order code	Pack/Qty.
white	0261/31-500	2CKA000230A0430	1
grey	0261/33-500	2CKA000230A0432	1
alpine white	0261/32-500	2CKA000230A0431	1

¹⁾ Please follow the recommendations of the cable and device producers for the max. HDMI cable lengths.**VGA connection unit ¹⁾ with screw-type terminals and strain relief**

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx. To link analogue video data between PCs and laptops to monitors or digital projectors etc. VGA-type: D-type, 15-pole. Fully HD ready (1920 x 1080 pixel). For 15-wire VGA-cables via screw-type terminals. For trunk systems, flush-mounted wall boxes and underfloor systems. For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended. Without cover plate. Without claws. Protection class (Device): IP 20. Mounting depth: 34 mm.

Colour	Type	Order code	Pack/Qty.
white	0261/21-500	2CKA000230A0424	1
grey	0261/23-500	2CKA000230A0426	1
alpine white	0261/22-500	2CKA000230A0425	1

¹⁾ Please follow the recommendations of the cable and device producers for the max. VGA cable lengths.

Zoni®

Telecommunications systems / multimedia

**USB connection unit ¹⁾
with screw-type terminals and strain relief**

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link mobile devices like e.g. printer, scanner, USB-sticks or digital cameras etc.
USB-type A, USB 2.0 compatible.
For 5-wire USB- cables via screw-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate.
Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	0261/11-500	2CKA000230A0418	1
grey	0261/13-500	2CKA000230A0420	1
alpine white	0261/12-500	2CKA000230A0419	1

¹⁾ Please follow the recommendations of the cable and device producers for the max. USB cable lengths.

**Cover plate for FM radio / Busch-Radio iNet /
BT radio inserts**

Colour	Type	Order code	Pack/Qty.
white	3299T-A40200 500	2CHT704020A4500	5
black matt	3299T-A40200 237	2CHT704020A4237	5
white matt	3299T-A40200 240	2CHT704020A4240	5
grey	3299T-A40200 241	2CHT704020A4241	5
nude	3299T-A40200 242	2CHT704020A4242	5
olive	3299T-A40200 243	2CHT704020A4243	5
greige	3299T-A40200 244	2CHT704020A4244	5

Busch-Radio DAB+ ¹⁾

DAB+ and RDS stereo radio alarm clock for flush-mounted installation. With high-resolution colour display for showing additional information. Reception frequency: 87.50 MHz - 108.00 MHz. Receive frequency (DAB+): 174 MHz – 240 MHz. With external AUX input/output, reversible. For mono/stereo operation. 8 radio stations storable. With time and date display. With individual alarm and snooze function. With automatic switch-off function (automatic sleep mode). With extension input to remote-controlled ON/OFF switches. With integrated antenna. With additional connection for external antenna. Permitted speaker impedance: 4 - 8 Ohm. Can be installed as 1gang and in multiple combinations. Control element: 4-button operation via floating rocker. Display elements: ICU graphic display with 280 DPI. Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Control/Signal outputs: 2, Loudspeaker output, impedance 4 Ohm
Rated power: 2 W (RMS)
Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 47 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8215 U-101-500	2CKA008200A0276	1/10

¹⁾ No claw. Screw-fixing via keyholes.

**Busch-Radio BTconnect DAB+ ¹⁾
With Bluetooth interface for music replay.**

DAB+ and RDS stereo radio alarm clock for flush-mounted installation. With high-resolution colour display for showing additional information. With Bluetooth interface for music replay of mobile devices. Connection of external Bluetooth loudspeakers possible. Reception frequency: 87.50 MHz - 108.00 MHz. Receive frequency (DAB+): 174 MHz – 240 MHz. With external AUX input/output, reversible. For mono/stereo operation. 8 radio stations storable. With time and date display. With individual alarm and snooze function. With automatic switch-off function (automatic sleep mode). With extension input to remote-controlled ON/OFF switches. With integrated antenna. With additional connection for external antenna. Permitted speaker impedance: 4 - 8 Ohm. Can be installed as 1gang and in multiple combinations. Bluetooth specification: 4.2. Bluetooth profiles supported: A2DP. Number of stored Bluetooth connections: max. 8. Control element: 4-button operation via floating rocker. Display elements: ICU graphic display with 280 DPI. Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 2 W (RMS)
Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 47 mm
Mounting depth: 32 mm



Colour	Type	Order code	Pack/Qty.
	8217 U-101-500	2CKA008200A0279	1/10

¹⁾ No claw. Screw-fixing via keyholes.

Zoni®

Telecommunications systems / multimedia

Busch-Radio iNet ¹⁾ ²⁾ ³⁾ ⁴⁾

WLAN Internet radio alarm clock for flush-mounted installation.
 For the reception of national and international radio stations via Internet.
 Radio station search possible via various genres.
 With high resolution graphic display and background illumination.
 With external AUX input.
 Integrated web-server for configuration and control.
 Remote operation with smartphone via browser surface.
 UPnP replay function. It is controlled via smartphone.
 For mono/stereo operation.
 8 radio stations storable.
 With time and date display.
 With alarm function.
 With short-time timer.
 With automatic switch-off function (automatic sleep mode).
 With extension input to remote-controlled ON/OFF switches.
 With integrated WLAN antenna.
 WLAN Standards: IEEE 802.11b / IEEE 802.11g and IEEE 802.11n (2,4 GHz).
 WLAN safety: WPA / WPA2.
 Permitted speaker impedance: 4 - 8 Ohm
 Can be installed as 1gang and in multiple combinations.
 Rated voltage: 110 - 230 V~, +10 % / -10 %
 Rated frequency: 50 Hz - 60 Hz
 Protection class (Device): IP 20
 Temperature range (Device): 5 °C to 40 °C
 Dimensions: (L x W x D): 71 mm x 71 mm x 49 mm
 Mounting depth: 33 mm

Colour	Type	Order code	Pack/Qty.
	8216 U-500	2CKA008200A0153	1/10

¹⁾ No claw. Screw-fixing via keyholes.²⁾ Matching loudspeaker insert 8223 U.³⁾ Can also be combined with built-in loudspeaker (8222 EB) and moist atmosphere loudspeaker (8224 EB).⁴⁾ To be mounted only in connection with commercially available flush-mounted installation boxes according to DIN 49073 > 40 mm depth gauge or Busch-Jaeger art. no. 3040, 3050 or 3060.**Loudspeaker insert ¹⁾ 5 cm (2")**

With flat plug connector.
 With broadband characteristics.
 Rated output: 2 W (RMS)
 Incl. speaker connection cable.
 Frequency response: 200 - 20,000 Hz
 Impedance: 4 Ohm
 Protection class (Device): IP 20, SELV
 Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8223 U-500	2CKA008200A0183	1/10

¹⁾ No claw. Screw-fixing via keyholes.**Cover plate for loudspeaker**

Colour	Type	Order code	Pack/Qty.
white	5016T-A00075 500	2CHT660075A4500	5
black matt	5016T-A00075 237	2CHT660075A4237	5
white matt	5016T-A00075 240	2CHT660075A4240	5
grey	5016T-A00075 241	2CHT660075A4241	5
nude	5016T-A00075 242	2CHT660075A4242	5
olive	5016T-A00075 243	2CHT660075A4243	5
greige	5016T-A00075 244	2CHT660075A4244	5

Loudspeaker insert ¹⁾ 5 cm (2")

With flat plug connector.
 With broadband characteristics.
 Rated output: 2 W (RMS)
 Incl. speaker connection cable.
 Frequency response: 200 - 20,000 Hz
 Impedance: 4 Ohm
 Protection class (Device): IP 20, SELV
 Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8223 U-500	2CKA008200A0183	1/10

¹⁾ No claw. Screw-fixing via keyholes.

Zoni®

Dimmers

Center Pl. SF Dimmer



Colour	Type	Order code	Pack/Qty.
white	3294T-A00123 500	2CHT940123A4500	5
black matt	3294T-A00123 237	2CHT940123A4237	5
white matt	3294T-A00123 240	2CHT940123A4240	5
grey	3294T-A00123 241	2CHT940123A4241	5
nude	3294T-A00123 242	2CHT940123A4242	5
olive	3294T-A00123 243	2CHT940123A4243	5
greige	3294T-A00123 244	2CHT940123A4244	5

Busch-rotary dimmer 1) 2) 3) 4) 5) 6) 7) 8) 9)
Flush-mounted, LED, 2-100 W


With rotary control, two-way switch and soft-catch.
 2-wire connection (neutral conductor not required)
 Optimised for dimming of retrofit LED lamps (LEDi).
 For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
 For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
 Mix operation of LEDi with conventional loads possible.
 Via mode switch adjustable between leading edge control and trailing edge control.
 Low-noise level by MOSFET transistors.
 With electronic short-circuit protection.
 With electronic overload protection.
 With adjustable minimum brightness.
 Without cover plate.
 Rated voltage: 230 V~, + 10% / - 10%
 Rated frequency: 50 Hz/60 Hz
 Nominal power: 2 - 100 W/VA (retrofit LED loads).
 Nominal power: 10 - 250 W/VA (non-LED loads).
 Protection class (Device): IP 20
 Temperature range (Device): 0 °C to 35 °C IEC 60669-2-1, British Standard EN 60669-2-1



Colour	Type	Order code	Pack/Qty.
	6523 U-102-500	2CKA006512A0335	1/10

- ¹⁾ Illuminable with neon lamp. Neon lamp included in delivery with cover plate.
²⁾ In the case of conventional transformers, take ~20% transformer loss into account.
³⁾ In case of electronic transformers, 5 % transformer losses.
⁴⁾ Also applicable for 1gang 2way installations.
⁵⁾ Provided with terminal for net disconnection devices.
⁶⁾ Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
⁷⁾ Recommendation: Please use loads and types of one producer.
⁸⁾ The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
⁹⁾ A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Busch-rotary dimmer 1) 2) 3) 4) 5) 6) 7) 8) 9)
UP, LED, 2-400 W


Very small installation depth: < 20 mm
 Without claws.
 With rotary control, two-way switch and soft-catch.
 2-wire connection (neutral conductor not required)
 Optimised for dimming of retrofit LED lamps (LEDi).
 For dimmable Retrofit-LEDs (LEDi).
 For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
 For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
 Mix operation of LEDi with conventional loads possible.
 With manually adjustable operating mode: trailing / leading edge control.
 With adjustable minimum/maximum brightness.
 Low-noise level by MOSFET transistors.
 With electronic short-circuit protection.
 With electronic overload protection.
 Without cover plate.
 Rated voltage: 230 V~, + 10% / - 10%
 Rated frequency: 50 Hz/60 Hz
 Nominal power: 2 - 100 W/VA (leading edge control)
 Nominal power: 2 - 400 W/VA (trailing edge control)
 Protection class (Device): IP 20
 Temperature range (Device): 0 °C to 35 °C IEC 60669-2-1, British Standard EN 60669-2-1



Colour	Type	Order code	Pack/Qty.
	6523 UR-103-500	2CKA006512A0345	1/10

- ¹⁾ Illuminable with neon lamp. Neon lamp included in delivery with cover plate.
²⁾ In the case of conventional transformers, take ~20% transformer loss into account.
³⁾ In case of electronic transformers, 5 % transformer losses.
⁴⁾ Also applicable for 1gang 2way installations.
⁵⁾ Provided with terminal for net disconnection devices.
⁶⁾ Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
⁷⁾ Recommendation: Please use loads and types of one producer.
⁸⁾ The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
⁹⁾ A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Zoni®

Dimmers

Busch-rotary dimmer ¹⁾ ²⁾ ³⁾ ⁴⁾ flush mounted, 1-10V



With rotary control.
For controlling ballast units for fluorescent lamps with control output 1-10 V DC, control current max. 50 mA DC.
For LED control via control gears
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 700 W/VA
IEC 60669-2-1, British Standard EN 60669-2-1



Colour	Type	Order code	Pack/Qty.
	2112 U-101-500	2CKA006599A2873	1/10

¹⁾ Non-illuminable.

²⁾ Use cover plates 2115 J-.../2115-.../6540-... .

³⁾ Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

⁴⁾ Making-current limiters have to be provided in case of too high making currents.

Busch-rotary dimmer ¹⁾ Flush-mounted, DALI, tunable white



For DALI broadcast service (via central telegram).
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI- interface.
With rotary control and ON/OFF push operation.
Fool proofed.
For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8).
Colour temperature can then be set between 2,700 K - 6,500 K.
Brightness power-on level and background brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Max. current consumption: 15 mA.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
For the generation of the DALI voltage a power supply according to IEC 62386 is required; e.g. from Tridonic, Philips, Helvar or BJE article no. 2116/11 U.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116 U	2CKA006599A3025	1

¹⁾ Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-rotary dimmer ¹⁾ Flush-mounted, DALI, with internal power supply, tunable white



For DALI broadcast service (via central telegram).
With integrated DALI power adaptor.
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI- interface.
With rotary control and ON/OFF push operation.
For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8).
Colour temperature can then be set between 2,700 K - 6,500 K.
With electronic short-circuit protection.
With electronic overload protection.
Brightness power-on level and background brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Up to 3 potentiometers are connectable in parallel in active mode.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
DALI-voltage: 15,5 V=
Rated current: max. 75 mA
Power consumption: < 2,5 W
Number of DALI-units:
37 in case of one active power-potentiometer in case of three active power-potentiometer in parallel connection: 111
Active mode: the potentiometer is supporting the necessary control circuit for other DALI-devices.
Passive mode: the potentiometer is suitable as additional operation point.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116/11 U	2CKA006599A3026	1

¹⁾ Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Zoni®

Room thermostats / Timers

Cover plate for thermostat / Short-time timer / Comfort timer / Control element / Count-down timer and CO₂ sensor



Colour	Type	Order code	Pack/Qty.
white	3299T-A40100 500	2CHT704010A4500	5
black matt	3299T-A40100 237	2CHT704010A4237	5
white matt	3299T-A40100 240	2CHT704010A4240	5
grey	3299T-A40100 241	2CHT704010A4241	5
nude	3299T-A40100 242	2CHT704010A4242	5
olive	3299T-A40100 243	2CHT704010A4243	5
greige	3299T-A40100 244	2CHT704010A4244	5

Combination thermostat



Thermostat with low insert (20 mm mounting depth) meeting the Ecodesign requirements. The thermostat is pre-programmed. Rated voltage 230 V AC $\pm$ 10% 50 Hz. Output 1 no and connectors 1.5 mm² to 4 mm². Switching current 250 V AC / 16 (2) A, protection class II and protection class IP21. Operating temperature 0 °C to 35 °C and storage temperature -20 °C to 70 °C. Clock Accuracy (at 20 °C) $\pm$ 0.5 sec / min. Power consumption (standby) <0.05 W. Floor sensor NTC 10k Ω @ 25 °C and external control (EXT connector) 230V AC / 10 μ A (same phase).

Colour	Type	Order code	Pack/Qty.
	TC16-20U	2TKA00004033	1

Busch-Short-time timer insert ¹⁾ countdown timer



For time-programmed switching of electrical consumers. With control cover, without cover plate. Minimum timer time: 1 second. Maximum timer time: 9:59:59 hours. Rated voltage: 230 V~, +10 % / -10 % Rated frequency: 50 Hz Outputs: 1x Normally open contact Rated current: 10 A, cos ϕ 1 Rated power: 2300 VA Temperature range (Device): 0 °C to 35 °CIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	6465 U-101-500	2CKA006410A0393	1/10

Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.
------------------------	--

Cover frames:	1gang frame 1721 BS-2xG or Dual Box frame 1722 BSDB-2xG.
----------------------	--

2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.
------------------------------------	---

neon indicator:	not applicable
------------------------	----------------

¹⁾ Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

CO Busch Raumluftsensor® room sensor



With display for carbon dioxide, humidity, temperature and air pressure. Setting values: carbon dioxide 800 ppm - 1500 ppm, humidity 40% - 95%. With 2 zero-potential relay contacts. Nominal voltage: 230 V~ Nominal current: 6 A cos ϕ = 1 Without claw fixation. To fit cover plate 6435-xxx.

Colour	Type	Order code	Pack/Qty.
	1091 U-500	2CKA001032A0518	1

Cover plate for rotary thermostat

Cover with button



Colour	Type	Order code	Pack/Qty.
white	3292T-A00300 500	2CHT910300A4500	5
black matt	3292T-A00300 237	2CHT910300A4237	5
white matt	3292T-A00300 240	2CHT910300A4240	5
grey	3292T-A00300 241	2CHT910300A4241	5
nude	3292T-A00300 242	2CHT910300A4242	5
olive	3292T-A00300 243	2CHT910300A4243	5
greige	3292T-A00300 244	2CHT910300A4244	5

Room Thermostat

NEW



Electronic room thermostat, open contact, fm Normally open contact, non-isolated Switch contact opens when the set temperature is reached. Without fixing claws. Separate terminal to activate eco mode to reduce the room temperature by 3K. See respective cover plates 1794 R-xx. Class of temperature controller 1 Contribution to space heating energy efficiency 1,0%. Rated voltage: 230 V~. Power dissipation: $\leq$ 0,15 W Rated current: 10 A. Temperature range (device): 5 °C - 30 °C Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm Mounting depth: 25 mm. Protection class device: IP 20 Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete. Servo-valves, "de-energised open", are necessary for connection to thermostat. e.g. Article No. 6164/10-102. Switching temperature difference: $\pm$ 0.5 K

Colour	Type	Order code	Pack/Qty.
	1094 U-101-500	2CKA001032A0525	1/10
	1097 U-101-500	2CKA001032A0528	1/10
	1099 UHK-101-500	2CKA001032A0531	1/10

Zoni®

Movement detectors

Control unit PIR, 180°



Colour	Type	Order code	Pack/Qty.
white	3299T-A02182 500	2CHT702182A4500	1
black matt	3299T-A02182 237	2CHT702182A4237	1
white matt	3299T-A02182 240	2CHT702182A4240	1
grey	3299T-A02182 241	2CHT702182A4241	1
nude	3299T-A02182 242	2CHT702182A4242	1
olive	3299T-A02182 243	2CHT702182A4243	1
greige	3299T-A02182 244	2CHT702182A4244	1

Relay switch for movement detector insert



For motion detectors Art. No. 3299H-A02182 ..
 Operating temperature: -10 °C to +55 °C
 2,300 V for incandescent lamps, 1,750 V for
 low-voltage halogen lamps with conventional
 or electronic transformers.
 500 VA / 64 mFd for fluorescent lamps
 3-wire connection
 Nominal voltage: 230 V ~

	Type	Order code	Pack/Qty.
1x rele	3299U-A00006	2CHU700006A4000	1
2x rele	3299U-A00007	2CHU700007A4000	1
1x triak	3299U-A00001	2CHU700001A4000	1

Zoni®

Illumination

LED illumination cover plate



Colour	Type	Order code	Pack/Qty.
white	5016T-A00070 500	2CHT160070A4500	5
black matt	5016T-A00070 237	2CHT160070A4237	5
white matt	5016T-A00070 240	2CHT160070A4240	5
grey	5016T-A00070 241	2CHT160070A4241	5
nude	5016T-A00070 242	2CHT160070A4242	5
olive	5016T-A00070 243	2CHT160070A4243	5
greige	5016T-A00070 244	2CHT160070A4244	5

LED illumination insert



Built-in depth: 25 mm
 Screw-type terminals.
 Nominal current: 10 mA
 Nominal voltage: 230 V ~

Colour	Type	Order code	Pack/Qty.
White	3917U-A00050	2CHU640050A4000	1
Blue	3917U-A00051	2CHU640051A4000	1
Green	3917U-A00052	2CHU640052A4000	1
Red	3917U-A00053	2CHU640053A4000	1

Indication and orientation LED illumination insert with infrapassive sensor



Installation depth: 25 mm
 Screw-type terminals.
 Fixation via screws only.
 Switch-off delay: 1min
 Threshold lighting : 10lx
 12 mA, 230 V AC

Colour	Type	Order code	Pack/Qty.
White light	3299U-A52500	2CHU705250A4000	1

Zoni®

Illumination

Lighting insert LED, 0.5 mA



To provide orientation light for button switches and push-switches in the Levit range
The LED collar is red
Nominal current: 0.5 mA
Nominal voltage: 230 V ~

Colour	Type	Order code	Pack/Qty.
White	3916-05444	2CHU165444C4000	10
Blue	3916-05445	2CHU165445C4000	10
Red	3916-05443	2CHU165443A4000	10

Lighting insert LED, 1 mA



To provide control light for button switches and push-switches in the Levit range
The LED collar is yellow
Nominal current: 0.5 mA
Nominal voltage: 230 V ~

Colour	Type	Order code	Pack/Qty.
White	3916-10444	2CHU161444C4000	10

Blind cover




For communication insert mounting plates (Art. No. 5014H-A01018 ..)

Colour	Type	Order code	Pack/Qty.
Grey	1116412-3	1116412-3	25

Zoni®


Rocker switches / push switches

Rocker 1gang for f@h




Colour	Type	Order code	Pack/Qty.
white	6620T-A01000 500	2CHT621000A4500	5
black matt	6620T-A01000 237	2CHT621000A4237	5
white matt	6620T-A01000 240	2CHT621000A4240	5
grey	6620T-A01000 241	2CHT621000A4241	5
nude	6620T-A01000 242	2CHT621000A4242	5
olive	6620T-A01000 243	2CHT621000A4243	5
greige	6620T-A01000 244	2CHT621000A4244	5

Rocker 1gang for f@h, with blind icon



Colour	Type	Order code	Pack/Qty.
white	6220T-A01002 500	2CHT621002A4500	5
black matt	6220T-A01002 237	2CHT621002A4237	5
white matt	6220T-A01002 240	2CHT621002A4240	5
grey	6220T-A01002 241	2CHT621002A4241	5
nude	6220T-A01002 242	2CHT621002A4242	5
olive	6220T-A01002 243	2CHT621002A4243	5
greige	6220T-A01002 244	2CHT621002A4244	5

Rocker 1gang for f@h, with scene icon



Colour	Type	Order code	Pack/Qty.
white	6620T-A01003 500	2CHT621003A4500	5
black matt	6220T-A01003 237	2CHT621003A4237	5
white matt	6220T-A01003 240	2CHT621003A4240	5
grey	6220T-A01003 241	2CHT621003A4241	5
nude	6220T-A01003 242	2CHT621003A4242	5
olive	6220T-A01003 243	2CHT621003A4243	5
greige	6220T-A01003 244	2CHT621003A4244	5

Zoni®

Rocker switches / push switches

Rocker 2gang for f@h



Colour	Type	Order code	Pack/Qty.
white	6620T-A02000 500	2CHT622000A4500	5
black matt	6220T-A02000 237	2CHT622000A4237	5
white matt	6220T-A02000 240	2CHT622000A4240	5
grey	6220T-A02000 241	2CHT622000A4241	5
nude	6220T-A02000 242	2CHT622000A4242	5
olive	6220T-A02000 243	2CHT622000A4243	5
greige	6220T-A02000 244	2CHT622000A4244	5

Rocker 2gang rileft/right for f@h, with blind icon



Colour	Type	Order code	Pack/Qty.
white	6620T-A02000 500	2CHT622002A4500	5
black matt	6220T-A02000 237	2CHT622002A4237	5
white matt	6220T-A02000 240	2CHT622002A4240	5
grey	6220T-A02000 241	2CHT622002A4241	5
nude	6220T-A02000 242	2CHT622002A4242	5
olive	6220T-A02000 243	2CHT622002A4243	5
greige	6220T-A02000 244	2CHT622002A4244	5

Rocker 2gang left for f@h, with scene icon




Colour	Type	Order code	Pack/Qty.
white	6620T-A02103 500	2CHT622103A4500	5
black matt	6220T-A21003 237	2CHT622103A4237	5
white matt	6220T-A21003 240	2CHT622103A4240	5
grey	6220T-A21003 241	2CHT622103A4241	5
nude	6220T-A21003 242	2CHT622103A4242	5
olive	6220T-A21003 243	2CHT622103A4243	5
greige	6220T-A21003 244	2CHT622103A4244	5

Rocker 2gang right for f@h, with scene icon



Colour	Type	Order code	Pack/Qty.
white	6620T-A22003 500	2CHT622203A4500	5
black matt	6220T-A22003 237	2CHT622203A4237	5
white matt	6220T-A22003 240	2CHT622203A4240	5
grey	6220T-A22003 241	2CHT622203A4241	5
nude	6220T-A22003 242	2CHT622203A4242	5
olive	6220T-A22003 243	2CHT622203A4243	5
greige	6220T-A22003 244	2CHT622203A4244	5

Cover plate for room thermostat for f@h



Colour	Type	Order code	Pack/Qty.
white	6620T-A03000 500	2CHT623000A4500	5
black matt	6220T-A03000 237	2CHT623000A4237	5
white matt	6220T-A03000 240	2CHT623000A4240	5
grey	6220T-A03000 241	2CHT623000A4241	5
nude	6220T-A03000 242	2CHT623000A4242	5
olive	6220T-A03000 243	2CHT623000A4243	5
greige	6220T-A03000 244	2CHT623000A4244	5

Adapter Ring for 55x55mm



Colour	Type	Order code	Pack/Qty.
white	3901T-B11 B	2CHT010011B4500	5
black	3901T-B11 N	2CHT010011B4509	5

Freely programmable touch panel



Freely programmable touch panel 1 – up to 12 fold featuring a 2.4-inch IPS screen with 240*240 resolution that offers home control and monitoring of the free@home, or KNX system.


Colour	Type	Order code	Pack/Qty.
black	SD/U12.55.1-825	2TMA310011B0001	1

Zoni®

ABB flexTronics inserts

Relay insert flex, 1gang ¹⁾

3 wire connection (neutral conductor required).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-...
For Busch-Watchdog 180 flex sensors 6476x-...
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz. Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical. Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps. Rated power: 2300 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 2300 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm




Colour	Type	Order code	Pack/Qty.
	64811 U-500	2CKA006800A3042	1/10

¹⁾ Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Relay insert flex, 2gang ¹⁾

3 wire connection (neutral conductor required).
For switching lighting systems.
For switching two independent load circuits.
For controlling light and ventilation systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-...
For Busch-Watchdog 180 flex sensors 6476x-...
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz. Inputs: 2
Outputs: 2x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical. Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps. Rated power: 1840 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 1150 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64821 U-500	2CKA006800A3045	1

¹⁾ Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

e-contact insert flex, 1gang ¹⁾ ²⁾

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-...
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 3 - 240 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 10 - 240 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 3 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64814 U-500	2CKA006800A3048	1

¹⁾ Use only dimmable high-voltage LEDs.

²⁾ Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Zoni®

ABB flexTronics inserts

**LED dimmer insert flex, 1gang ¹⁾ ²⁾ ³⁾ ⁴⁾ ⁵⁾ ⁶⁾
FM, LED, 3-240 VA**

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable
(recommended for the connection of low loads
< 10 W/VA).
Touch dimmer for switching lighting systems.
Operation in 1gang 2way installations via push switch-
unit for combination with flush-mounted units.
Operation also possible via conventional push buttons
(2020 US, 2021/6 UK).
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or
electronic transformers.
For incandescent lamps, 230 V tungsten halogen
lamps, low-voltage halogen lamps with conventional or
electronic transformers and dimmable energy-saving
halogen lamps.
Mix operation of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing /
leading edge control.
With adjustable minimum brightness.
With light-level memory and minimum brightness
memory.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without control cover.
For control element flex, 1gang, 64711.
For control element flex, 2gang, 64721.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors, wireless,
6276x-...-WL.
Rated power: 3-240 VA (LEDi)
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x dimming channel
Suitable for: 230 V LEDi, typical (leading edge control)
Rated power: 3 - 100 VA
Suitable for: 230 V LEDi, typical (trailing edge control)
Rated power: 3 - 240 W
Suitable for: 230 V incandescent lamps, 230 V halogen
lamps and low-voltage halogen lamps with conventional
transformers or Busch Electronic Transformer.
Rated power: 10 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm IEC 60669-2-1, British Standard
EN 60669-2-1



Colour	Type	Order code	Pack/Qty.
	64851 U-500	2CKA006500A0013	1

¹⁾ In the case of conventional transformers, take ~20% transformer loss into account.

²⁾ In case of electronic transformers, 5 % transformer losses.

³⁾ Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

⁴⁾ Recommendation: Please use loads and types of one producer.

⁵⁾ The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.

⁶⁾ A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Extension insert flex ¹⁾

3 wire connection (neutral conductor required).
For the extension of the Busch-Comfort switch or
presence detector installations. For group control of flex
inserts via extension unit communication.
Operation in 1gang 2way installations via push switch-
unit for combination with flush-mounted units.
Without control cover. For control element flex, 1gang,
wireless, 62711-WL. For control element flex, 2gang,
wireless, 62721-WL. For Busch-Watchdog 180 flex
sensors 6476x-... . For Busch-Watchdog 180 flex sensors,
wireless, 6276x-...-WL. Combinable with all flex inserts.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz. Control/Signal outputs: 1,
electronic output, potential-bound. Temperature range
(Device): -5 °C to 45 °C. Dimensions: (L x W x D): 71 mm x
71 mm x 30 mm. Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64891 U-500	2CKA006800A3051	1

¹⁾ Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Blind insert, 1 gang, 2 way flex

3 wire connection (neutral conductor required). For the
control of roller shutters, blind and awning motors with
mechanical or electronic limit switch shut-off. Group
formation via extension input possible. Operation
also via conventional push buttons (2020 US non-
illuminated/2021/6 UK) possible. Without control cover.
For control element flex, 1gang, wireless, 62711-WL. For
control element flex, 2gang, wireless, 62721-WL.

Colour	Type	Order code	Pack/Qty.
	64831 U-500	2CKA006400A0096	1

Zoni®

ABB Free@home - inserts

**free@home sensor/dimmer actuator - 1/1-gang**

For dimming 230 V~ loads. With integrated universal dimming actuator for controlling different lamps. The dimming function is available pre-configured. Outputs: 1x dimming channel. Suitable for: 230 V incandescent lamps and low-voltage halogen lamps with conventional transformers or electronic transformers. Rated power: 10–180 W / VA. Suitable for: LEDi and energy-saving bulbs. Rated power: 2–80 W / VA. Mounting depth: 32 mm. To be installed with SR-1-85, SRL-1-85, SRD-1-85, SRB-1-85 and SRS-1-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SDA-F-1.1.1	2CKA006220A0126	1

**free@home sensor/dimmer actuator - 2/1-gang**

For dimming 230 V~ loads. With integrated universal dimming actuator for controlling different lamps. The dimming function is available pre-configured. Outputs: 1x dimming channel. Suitable for: 230 V incandescent lamps and low-voltage halogen lamps with conventional transformers or electronic transformers. Rated power: 10–180 W / VA. Suitable for: LEDi and energy-saving bulbs. Rated power: 2–80 W / VA. Mounting depth: 32 mm. To be installed with SR-2-85, SRL-2-L-85, SRL-2-R-85, SRD-2-L-85, SRD-2-R-85, SRB-2-85, SRS-2-L-85 and SRS-2-R-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SDA-F-2.1.1	2CKA006220A0127	1

**free@home sensor/blind actuator - 1/1-gang**

For controlling blind and awning motors. With integrated blind actuator. Blind function is available pre-configured. Outputs: 1x Change-over contacts/normally open contact, potential-bound. Rated power: 920 VA. Rated current: 4 A. Suitable for: Operating mode blind. Mounting depth: 32 mm. To be installed with SR-1-85, SRL-1-85, SRD-1-85, SRB-1-85 and SRS-1-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SBA-F-1.1.1	2CKA006220A0128	1

**free@home sensor/blind actuator - 2/1-gang**

For controlling blind and awning motors. With integrated blind actuator. Blind function is available pre-configured. Outputs: 1x Change-over contacts/normally open contact, potential-bound. Rated power: 920 VA. Rated current: 4 A. Suitable for: Operating mode blind. Mounting depth: 32 mm. To be installed with SR-2-85, SRL-2-L-85, SRL-2-R-85, SRD-2-L-85, SRD-2-R-85, SRB-2-85, SRS-2-L-85 and SRS-2-R-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SBA-F-2.1.1	2CKA006220A0129	1

**Control element, 1 gang flex**

Tapping control element, 1gang. Compatible with all free@home flex inserts. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64711-500	2CKA006400A0099	1

**Control element, 1 gang, flex wireless**

Tapping control element, 1gang. For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62711-WL-500	2CKA006200A0281	1

**Control element, 2 gang flex**

Tapping control element, 2gang. For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64721-500	2CKA006400A0101	1

**Control element, 1 gang, flex wireless**

Tapping control element, 2gang. For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62721-WL-500	2CKA006200A0283	1

Zoni® Frames

Cover frame 1gang



Colour	Type	Order code	Pack/Qty.
white	3901T-A00010 500	2CHT010010A6500	20
white matt	3901T-A00010 240	2CHT010010A6240	20
black matt	3901T-A00010 237	2CHT010010A6237	20
black matt / white	3901T-A00010 137	2CHT010010A6137	20
grey / whit	3901T-A00010 141	2CHT010010A6141	20
nude / white	3901T-A00010 142	2CHT010010A6142	20
olive / white	3901T-A00010 143	2CHT010010A6143	20
greige / white	3901T-A00010 144	2CHT010010A6144	20

Cover frame 2gang



Colour	Type	Order code	Pack/Qty.
white	3901T-A00020 500	2CHT010020A6500	30
white matt	3901T-A00020 240	2CHT010020A6240	30
black matt	3901T-A00020 237	2CHT010020A6237	30
black matt / white	3901T-A00020 137	2CHT010020A6137	30
grey / whit	3901T-A00020 141	2CHT010020A6141	30
nude / white	3901T-A00020 142	2CHT010020A6142	30
olive / white	3901T-A00020 143	2CHT010020A6143	30
greige / white	3901T-A00020 144	2CHT010020A6144	30

Cover frame 3gang



Colour	Type	Order code	Pack/Qty.
white	3901T-A00030 500	2CHT010030A6500	15
white matt	3901T-A00030 240	2CHT010030A6240	15
black matt	3901T-A00030 237	2CHT010030A6237	15
black matt / white	3901T-A00030 137	2CHT010030A6137	15
grey / whit	3901T-A00030 141	2CHT010030A6141	15
nude / white	3901T-A00030 142	2CHT010030A6142	15
olive / white	3901T-A00030 143	2CHT010030A6143	15
greige / white	3901T-A00030 144	2CHT010030A6144	15

Cover frame 4gang



Colour	Type	Order code	Pack/Qty.
white	3901T-A00040 500	2CHT010040A6500	15
white matt	3901T-A00040 240	2CHT010040A6240	15
black matt	3901T-A00040 237	2CHT010040A6237	15
black matt / white	3901T-A00040 137	2CHT010040A6137	15
grey / whit	3901T-A00040 141	2CHT010040A6141	15
nude / white	3901T-A00040 142	2CHT010040A6142	15
olive / white	3901T-A00040 143	2CHT010040A6143	15
greige / white	3901T-A00040 144	2CHT010040A6144	15

Cover frame 5gang



Colour	Type	Order code	Pack/Qty.
white	3901T-A00050 500	2CHT010050A6500	15
white matt	3901T-A00050 240	2CHT010050A6240	15
black matt	3901T-A00050 237	2CHT010050A6237	15
black matt / white	3901T-A00050 137	2CHT010050A6137	15
grey / whit	3901T-A00050 141	2CHT010050A6141	15
nude / white	3901T-A00050 142	2CHT010050A6142	15
olive / white	3901T-A00050 143	2CHT010050A6143	15
greige / white	3901T-A00050 144	2CHT010050A6144	15



—

ABB s.r.o.

Elektrotechnika

Resslova 3

466 02 Jablonec nad Nisou

Contact center

Phone: 800 312 222

Technical support

Phone: 800 800 104

E-mail: epj.jablonec@cz.abb.com

abb.cz/nizke-napeti

nizke-napeti.cz.abb.com

