


SIRCO M UL 508

Load break switches standards UL and CSA
from 16 to 100 A



Rotary switch
SIRCO M 3 x 80 A



Toggle switch
SIRCO M 3 x 80 A + 2 auxiliary contacts



Rotary switch
SIRCO M 3 x 80 A



The solution for

- > Industrial control systems



Strong points

- > Positive break indication
- > Direct or external operation
- > Compact footprint
- > DIN-rail or base mounting
- > Wide range of accessories
- > Up to 8 pole or 4 pole MTS

Conformity to standards⁽¹⁾

- > IEC 60947-3
- > UL 508 listed, Guide NLRV, File E173959
- > CSA C22.2§14, class 3211-05, File 112964




⁽¹⁾ Product reference on request.

Function

SIRCO M UL/CSA are compact and modular non-fusible disconnect switches. They make and break under all types of load conditions and provide safe isolation for any low voltage circuit, especially for machine control circuits.

General characteristics

- Positive break indication.
- Direct or external operation.
- Compact footprint.
- DIN-rail or base mounting.
- Wide range of accessories.
- Up to 8 pole or 4 pole MTS.



UL 508 non-metallic polycarbonate 4.4x enclosed SIRCO M

- > Enclosed SIRCO M switches allow safe control and disconnection of any motor application.



UL 508 manual motor controller “Suitable as motor disconnect”

References

Rating (A)	No. of poles	Toggle switch (direct handle included)	Rotary switch	Direct handle	External front and right side handles ⁽⁴⁾	Shaft for external handles	Switched fourth pole module	Auxiliary contacts	Terminal shrouds	Door mounting kit
16 A	3 P	2205 3000	2200 3000	Blue 2299 5012	S00 type I - 0 Black 3R, 12 ⁽¹⁾ 1473 1111	S00/S0 type 150 mm 5.9 in 1407 0515 200 mm 7.9 in 1407 0520 320 mm 12.6 in 1407 0532 ⁽²⁾	1 P 2200 1000	M type 1 AC NO + NC 2299 0001 1 AC 2 NC 2299 0011	1 P 2294 1005 ⁽³⁾ 3 P 2294 3005 ⁽³⁾	2299 3409
20 A	3 P	2205 3001	2200 3001		1 P 2200 1001					
25 A	3 P	2205 3002	2200 3002		Red/Yellow 3R, 12 ⁽¹⁾ 1474 1111		1 P 2200 1002			
32 A	3 P	2205 3003	2200 3003		Black 4, 4X ⁽¹⁾ 147D 1111		1 P 2200 1003			
40 A	3 P	2205 3004	2200 3004		Red/Yellow 4, 4X ⁽¹⁾ 147E 1111		1 P 2200 1004			
63 A	3 P	2205 3006	2200 3006		S0 type I - 0 Black 1, 3R, 12 ⁽¹⁾ 1483 1111		1 P 2200 1006			
80 A	3 P	2205 3008	2200 3008		Red/Yellow 1, 3R, 12 ⁽¹⁾ 1484 1111		1 P 2200 1008			
100 A CD	3 P	2205 3009	2200 3009		Black 4, 4X ⁽¹⁾ 148D 1111		1 P 2200 1009			
					Red/Yellow 4, 4X ⁽¹⁾ 148E 1111		1 P 2200 1009			

(1) Nema/UL type.

(2) Please order the shaft guide: 1419 0000 with the shaft.

(3) Top and bottom.

(4) There is no door interlocking when the switch is fitted on the side of the enclosure.

SIRCO M UL 508

Load break switches standards UL and CSA
from 16 to 100 A

UL 508 non-metallic polycarbonate 4, 4X enclosed SIRCO M



Function

Enclosed **SIRCO M** switches allow safe control and disconnection of any motor application.

General characteristics

- Grey enclosure with red handle.
- Equipped with a 3 pole SIRCO M.
- 1 removable ground terminal.
- Possibility of adding 1 power pole and 1 auxiliary contact.
- Nema/UL type 1, 3R, 12, 4, 4X.

Conformity to standards⁽¹⁾

- > IEC 60947-3
- > UL 508, Guide NLRV, file E173959
- > CSA C22.2#14, Class 3211-05, file 702154



(1) Product reference on request.


References

Rating (A)	No. of poles	Enclosed switches	Enclosure size	Switched fourth pole module	Unswitched neutral pole	Unswitched protective ground module	Auxiliary contacts	Terminal shrouds
32 A	3 P	2214 3503	Size 1	1 P 2200 1003	1 P 2200 5005⁽¹⁾	1 P 2200 9005⁽¹⁾	M type 1 AC NO + NC 2299 0001	1 P 2294 1005⁽²⁾
	3 P	2224 3503	Size 2					3 P 2294 3005⁽²⁾
63 A	3 P	2224 3506	Size 2	1 P 2200 1006⁽¹⁾	1 P 2200 5009⁽¹⁾	1 P 2200 9009⁽¹⁾	1 AC 2 NC 2299 0011	1 P 2294 1009⁽²⁾
								3 P 2294 3009⁽²⁾

(1) Not UL.

(2) Top and bottom.


Configuration

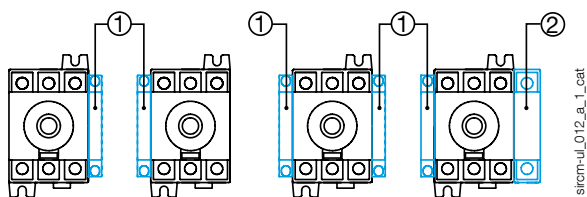

Configuration of the auxiliary contacts for enclosed SIRCO M.

1. M type auxiliary contacts.
2. Additional pole.


Dimensions (in/mm)

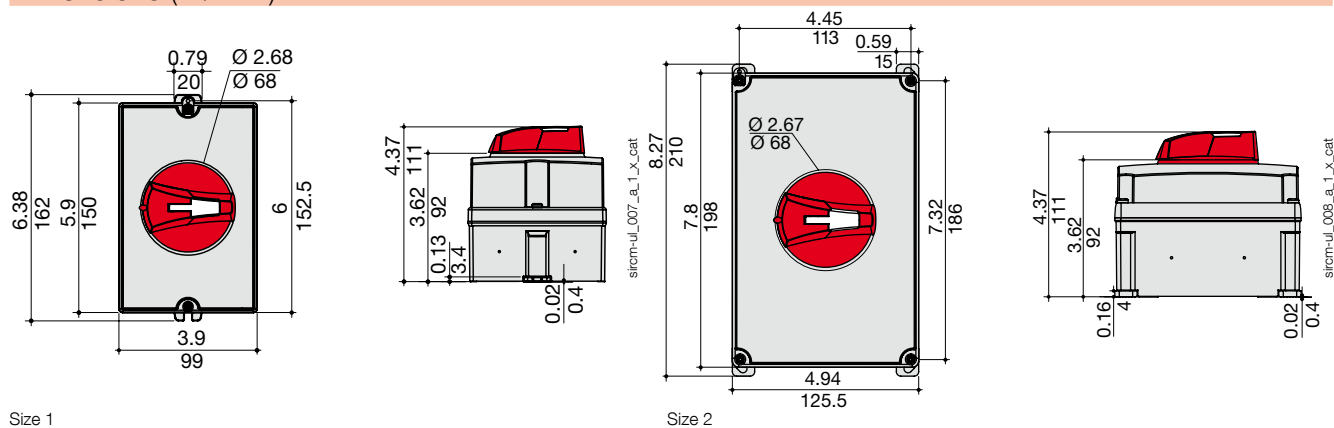

Accessories

Direct operation handle

Rating (A)	Handle color	Handle type	Reference
16 ... 100 CD	Blue	M00	2299 5012



M00 handle

access_277_a_2_cat

External operation handle

Use

The handle locking function prevents the user from opening the door of the enclosure when the switch is in the "ON" position (only if the handle is fitted on the door).

Opening the door when the switch is in the "ON" position is possible by defeating the interlocking function with the use of a tool (authorised persons only). The interlocking function is restored when the door is closed. The handle is padlockable with 3 padlocks.



S00 handle

access_264_a_2_cat

Front and right side handles I - 0

Rating (A)	Handle color	Handle type	Nema / UL type	Standard Reference	Heavy duty Reference
16 ... 100 CD	Black	S00	3R, 12	1473 1111	
16 ... 100 CD	Red/Yellow	S00	3R, 12	1474 1111	
16 ... 100 CD	Black	S00	4, 4X	147D 1111	
16 ... 100 CD	Red/Yellow	S00	4, 4X	147E 1111	
16 ... 100 CD	Black	S0	1, 3R, 12	1483 1111	
16 ... 100 CD	Red/Yellow	S0	1, 3R, 12	1484 1111	
16 ... 100 CD	Black	S0	4, 4X	148D 1111	
16 ... 100 CD	Red/Yellow	S0	4, 4X	148E 1111	
16 ... 100 CD	Black	S01	3R, 12	140F 2111	
16 ... 100 CD	Red/Yellow	S01	3R, 12	140G 2111	
16 ... 100 CD	Black	S01	4, 4X	140D 2111	140D 2911
16 ... 100 CD	Red/Yellow	S01	4, 4X	140E 2111	140E 2911

(1) Not UL.



S0 handle

access_279_a_2_cat



S01 handle

access_304_a_2_cat

Front handle for transfer switches I - 0 - II

Rating (A)	Handle color	Handle type	Nema / UL type	Reference
16 ... 100 CD	Black	S00	IP65	1473 1113 ⁽¹⁾

Front handle for transfer switches I - I+II - II

Rating (A)	Handle color	Handle type	Nema / UL type	Reference
16 ... 100 CD	Black	S00	IP65	1473 1114 ⁽¹⁾

Shafts for external handle

Use

Standard lengths:

- 150 mm,
- 200 mm,
- 320 mm.

Other lengths: please consult us.

For 3/4 pole switches, shaft extensions for external front and side handle.

For 6/8 pole switches and SIRCOVER M transfer switches.



access_280_a_2_cat

For 3/4 pole

Rating (A)	Handle type	Length		Reference
		(in)	(mm)	
16 ... 100 CD	S00	5.9	150	1407 0515
16 ... 100 CD	S00	7.9	200	1407 0520
16 ... 100 CD	S00	12.6	320	1407 0532
16 ... 100 CD	S01	7.9	200	1404 0520
16 ... 100 CD	S01	12.6	320	1404 0532
16 ... 100 CD	S01	15.7	400	1404 0540

For 6/8 pole

Rating (A)	Handle type	Length		Reference
		(in)	(mm)	
16 ... 100 CD	S00	5.9	150	1407 0515
16 ... 100 CD	S00	7.9	200	1407 0520
16 ... 100 CD	S00	12.6	320	1407 0532

SIRCO M UL 508

Load break switches standards UL and CSA
from 16 to 100 A

Accessories (continued)

Shaft guide for external handle

Use

This accessory enables handle to engage extension shaft with a misalignment of up to 15 mm.
Required for a shaft length from 320 mm.

Handle type	Reference
S00 and S0	1419 0000



access_260_a_2_cat

Additional pole

4th pole

Rating (A)	No. of poles	Type	Reference
16	1 P	switched	2200 1000
20	1 P	switched	2200 1001
25	1 P	switched	2200 1002
32	1 P	switched	2200 1003
40	1 P	switched	2200 1004
63	1 P	switched	2200 1006 ⁽¹⁾
80	1 P	switched	2200 1008 ⁽¹⁾
100 CD	1P	switched	2200 1009 ⁽¹⁾

(1) Not UL.

Use

Transforms:
- 3 pole SIRCO M load break switch into a 4 pole,
- 3 pole SIRCOVER M transfer switch into a 4 pole.



sircm_072_b_1_cat


Solid neutral pole

Rating (A)	No. of poles	Type	Reference
16 ... 40	1 P	unswitched	2200 5005 ⁽¹⁾
63 ... 100 CD	1 P	unswitched	2200 5009 ⁽¹⁾

(1) Not UL.

Use

Transforms the 3-pole switch into a 3-pole + solid neutral.



sircm_078_a_1_glb_cat


Ground module

Rating (A)	No. of poles	Type	Reference
16 ... 40	1 P	unswitched	2200 9005 ⁽¹⁾
63 ... 100 CD	1 P	unswitched	2200 9009 ⁽¹⁾

(1) Not UL.

Use

Adds 1 protective ground module pole to the load break switch.



Terminal shrouds

Use

Top and bottom additional protection against direct contact with the terminals or connection parts.
1 or 3 pole are available.

Perforation on each terminal cover enables remote thermographic inspection without dismantling.

Rating (A)	No. of poles	Position	Reference
16 ... 40	1 P	top and bottom	2294 1005
16 ... 40	3 P	top and bottom	2294 3005
63 ... 100 CD	1 P	top and bottom	2294 1009
63 ... 100 CD	3 P	top and bottom	2294 3009



sircm_049_a_1_cat

M type Auxiliary Contacts

Use

Pre-break and signaling of positions 0 and I by NO+NC or 2 NO Auxiliary Contacts.

They can be mounted on the left or on the right side of the device.

Max 4 Auxiliary Contacts per product (2 modules).


Characteristics

A300.

Rating (A)	No. of AC	AC type	Reference
16 ... 100 CD	1 AC	NO + NC	2299 0001
16 ... 100 CD	1 AC	2 NO	2299 0011



sircm_075_b_2_cat



sircm_081_a_1_x_cat

Auxiliary contacts configurations for SIRCO M

Conversion kit

Use

These accessories enable the assembly of

2 switches in order to achieve:

- 6 or 8 pole switches
- 3 or 4 pole open or close transition transfer switches.

Rating (A)	Type ⁽¹⁾	Reference
16 ... 100 CD	Load break switches 6/8 pole	2269 6009
16 ... 100 CD	Transfer switch 3/4 pole (I - 0 - II)	2209 6009
16 ... 100 CD	Transfer switch 3/4 pole (I - I+II - II)	2299 6009

(1) Non UL.



sircm_060_c_2_cat



sircm_097_b_2_x_cat

Conversion kit for 6 or 8 pole load break switches

Conversion kit for 3 and 4-pole transfer switches (I - 0 - II) or (I - I+II - II)



sircm_086_b_1_cat


Door mounting kit

Use

This kit enables direct mounting of the switch on the panel door or on the right or left side of the panel with S00 and S0 handles.

The S0 and S00 external handles are quick and easy to install due to an internal locking nut mounted on the inside of the enclosure.

Rating (A)	No. of poles	Reference
16 ... 100 CD	3/4 P	2299 3409

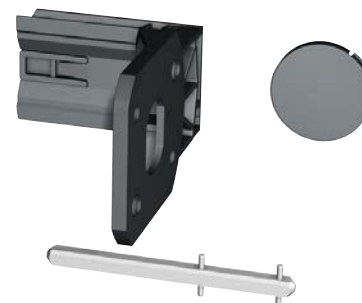

sircm_051_b_2_cat

SIRCO M UL 508

Load break switches standards UL and CSA
from 16 to 100 A

Characteristics

Characteristics according to UL 508/CSA22.2#14 suitable as motor disconnect

General use rating (A)	16 A	20 A	25 A	32 A	40 A	63 A	80 A	100 A CD
Short circuit rating at 600 VAC (kA)	65	65	65	65	10/65	50/65	50/65	50/65
Type of fuse	J	J	J	J	J	J	J	J
Max fuse rating (A)	30	30	30	30	60/30	100/60	100/60	100/60

Max. motor hp/FLA 3 ph motor max.

208 VAC	3/0.6	5/16.7	7.5/24.2	7.5/24.2	7.5/24.2	15/46.2	15/46.2	15/46.2
220-240 VAC	5/15.2	5/15.2	7.5/22	7.5/22	7.5/22	20/54	20/54	20/54
440-480 VAC	10/14	10/14	15/21	20/27	20/27	40/52	40/52	40/52
600 VAC	10/11	15/17	20/22	25/27	25/27	40/41	40/41	40/41

Connection terminals

Solid - 1 wire	#14 - #10	#14 - #10	#14 - #10	#14 - #10	#14 - #10	#14 - #10	#14 - #10	#14 - #10
Solid - 2 wires	2 x #12	2 x #12	2 x #12	2 x #12	2 x #12	2 x #12	2x #12	2x #12
Stranded - 1 wire	#14 - #4	#14 - #4	#14 - #4	#14 - #4	#14 - #4	#14 - #1	#14 - #1	#14 - #1
Stranded - 2 wires	2 x (#14 - #12)	2 x (#14 - #12)	2 x (#14 - #12)	2 x (#14 - #12)	2 x (#14 - #12)	2 x (#10 - #6)	2 x (#10 - #6)	2 x (#10 - #6)

Auxiliary contacts

Electrical characteristics	A300	A300	A300	A300	A300	A300	A300	A300
----------------------------	------	------	------	------	------	------	------	------

Mechanical characteristics

Endurance (number of operating cycles)	10 000	10 000	10 000	10 000	10 000	10 000	10 000	10 000
Operating torque (lbs.in/Nm)	7/0.8	7/0.8	7/0.8	7/0.8	7/0.8	8.9/1	8.9/1	8.9/1

Characteristics according to IEC 60947-3

Thermal current I_{th} (40°C)	16 A	20 A	25 A	32 A	40 A	63 A	80 A	100 A CD
Rated insulation voltage U_i (V)	800	800	800	800	800	800	800	800
Rated impulse withstand voltage U_{imp} (kV)	8	8	8	8	8	8	8	8

Rated operational currents I_e (A)

Rated voltage	Utilization	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾
415 VAC	AC-23 A/AC-23 B	16/16	20/20	25/25	32/32	40/40	63/63	80/80	80/80
500 VAC	AC-22 A/AC-22 B	16/16	20/20	25/25	32/32	40/40	63/63	80/80	-
500 VAC	AC-23 A/AC-23 B	16/16	20/20	25/25	25/25	25/25	63/63	63/63	-
690 VAC	AC-21 A/AC-21 B	16/16	20/20	25/25	32/32	40/40	63/63	80/80	100/100
690 VAC	AC-22 A/AC-22 B	16/16	20/20	25/25	32/32	32/40	40/63	63/80	-
690 VAC	AC-23 A/AC-23 B	16/16	20/20	25/25	25/25	25/25	40/40	40/40	-

Operational power in AC-23 (kW)

At 400 VAC without prebreaking AC in AC-23 (kW) ⁽¹⁾⁽²⁾	7.5	9	11	15	18.5	30	37	-
At 500 VAC without prebreaking AC in AC-23 (kW) ⁽¹⁾⁽²⁾	7.5	9	11	15	15	30	37	-
At 690 VAC without prebreaking AC in AC-23 (kW) ⁽¹⁾⁽²⁾	7.5	11	15	18.5	18.5	30	37	-

Fuse protected short-circuit withstand (kA rms prospective)

Prospective short-circuit current (kA rms) ⁽³⁾	50	50	50	50	50	50	50	25
Associated fuse rating (A) ⁽³⁾	16	20	25	32	40	63	80	100

Overload capacity (U_e 415 VAC)

Rated short-time withstand current 0.3 s. I_{CW} (kA rms) ⁽³⁾	2.5	2.5	2.5	2.5	2.5	3	3	1.5
Rated short-circuit making capacity I_{cm} (kA peak) ⁽³⁾	6	6	6	6	6	9	9	2.1

Connection

Minimum Cu cable cross section (mm ²)	1.5	1.5	1.5	1.5	1.5	2.5	2.5	2.5
Maximum Cu cable section (mm ²)	16	16	16	16	16	35	35	35
Tightening torque min / max (Nm)	2/2,2	2/2,2	2/2,2	2/2,2	2/2,2	3,5/3,85	3,5/3,85	3,5/3,85

(1) A/B: Category with index A = frequent operation - Category with index B = infrequent operation.

(2) The power value is given for information only, the current values vary from one manufacturer to another.

(3) For a rated operating voltage $U_e = 400$ VAC.


SIRCO M UL 508

Load break switches standards UL and CSA
from 16 to 100 A


Dimensions (in/mm)

16 to 100 A

Toggle operation

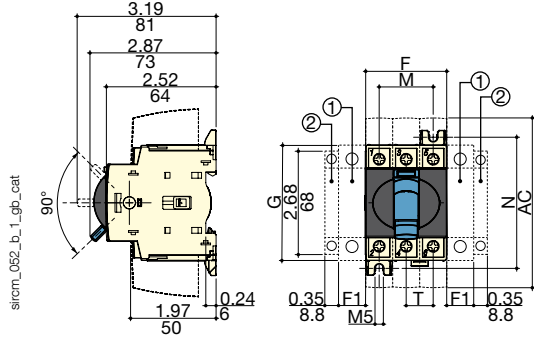


Direct operation with handle

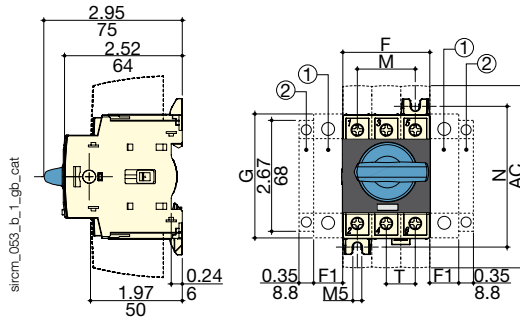


1. Position for 1 switched fourth pole module (1 per device max.) or 1 unswitched neutral pole or 1 protective ground module or 1 auxiliary contact.
2. Position for 1 auxiliary contact only.

Note: Maximum of 4 additional blocks.

External front handle

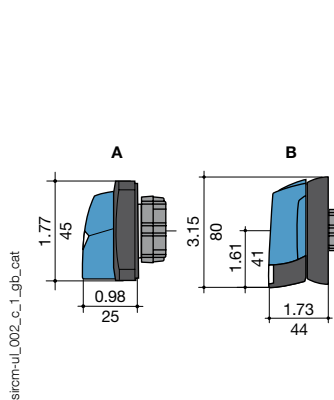

External side handle

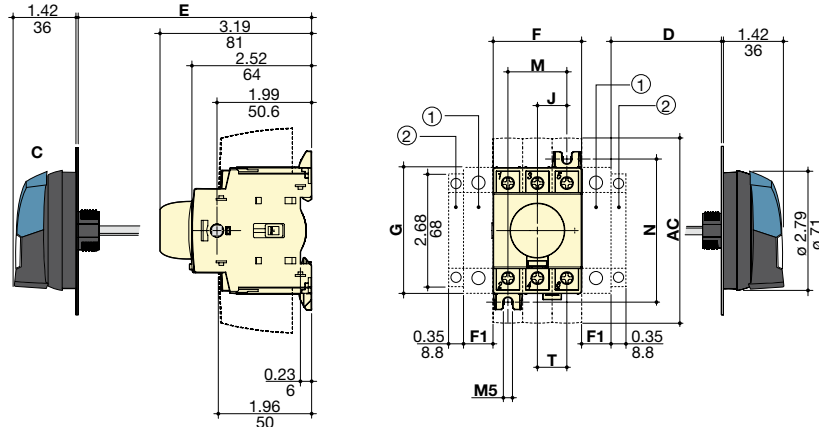


1. Position for 1 switched fourth pole module (1 per device max.) or 1 unswitched neutral pole or 1 ground module or 1 auxiliary contact.
2. Position for 1 auxiliary contact only.


Note: Maximum of 4 additional blocks.

Rating (A)	Units	Overall dimensions				Terminal shrouds		Switch body				Switch mounting		Connection
		D min	D max	E min	E max	AC	F	F1	G	J	M	N	T	
16 ... 40	in	1.18	9.25	3.94	14.64	4.33	1.77	0.59	2.67	0.59	1.18	2.95	0.59	
	mm	30	235	100	372	110	45	15	68	15	30	75	15	
63 ... 100 CD	in	1.18	9.25	3.93	14.64	4.33	2.06	0.69	2.99	0.69	1.38	3.35	0.69	
	mm	30	235	100	372	110	52.5	17.5	76	17.5	35	85	17.5	

Direct front handle for 6/8-pole load break switches
or 3/4-pole transfer switches

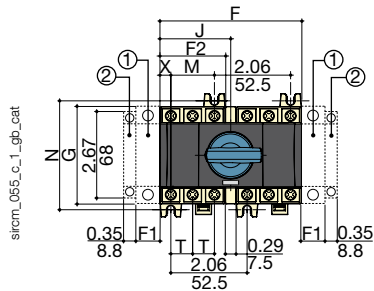

External front handle for 6/8-pole load break switches
or 3/4-pole transfer switches

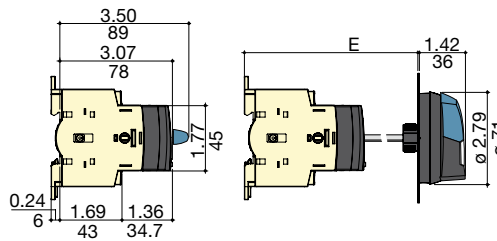












1. Position for 1 switched fourth pole module (1 per device max.) or 1 unswitched neutral pole or 1 ground module or 1 auxiliary contact.
2. Position for 1 auxiliary contact only.

Note: Maximum of 4 additional blocks.

Rating (A)	Units	Overall dimensions		Switch body					Switch mounting		Connection	
		E min	E max	F	F1	F2	G	J	M	N	T	X
16 ... 40	in	4.13	14.64	3.83	0.59	1.77	2.67	1.92	1.18	2.95	0.59	0.29
	mm	105	372	97.5	15	45	68	48.75	30	75	15	7.5
63 ... 100 CD	in	4.13	14.65	4.13	0.69	2.06	2.99	2.06	1.38	3.35	0.69	0.34
	mm	105	372	105	17.5	52.5	76	52.5	35	85	17.5	8.75

External handles dimensions (in/mm)

16 to 100 A

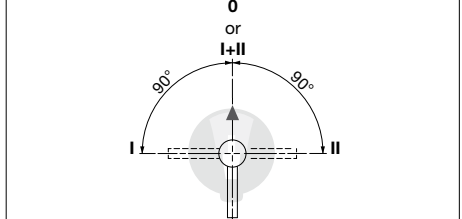Handle type	Front operation Direction of operation	Side operation Direction of operation	Door drilling
S00 type 			Door drilling With 4 fixing screws: Ø 1.22, Ø 31, 1.57, 40, 2 Ø 0.28, 2 Ø 7, 1.57, 40. With fixing nut: 0.12, 3, 0.53, 13.5, Ø 0.89, Ø 22.5.
S0 type 			Door drilling With 4 fixing screws: Ø 1.22, Ø 31, 1.57, 40, 2 Ø 0.28, 2 Ø 7, 1.57, 40. With fixing nut: 0.12, 3, 0.53, 13.5, Ø 0.89, Ø 22.5.
S00 type Transfer switches 	Front operation Direction of operation 		Door drilling With 4 fixing screws: Ø 1.45, Ø 37, 1.10, 28, 4 Ø 0.27, 4 Ø 7, 40. With fixing nut: 0.53, 13.5, 0.12, 3, Ø 0.88, Ø 22.5.
S01 type 			Door drilling With 4 fixing screws: Ø 1.46, Ø 37, 1.10, 28, 4 Ø 7, 4 Ø 0.28, 1.57, 40.

poign_069_c_1_us_cat

poign_060_a_1_us_cat

poign_070_a_1_gb_cat

poign_018_a_1_gb_cat