

MP800 - Hands-free digital video monitor with touch function icons



Video inside unit with flat front, handsfree, 3.5" colour display and touch and backlit function icons. ACO receivers are robust devices, made of the highest quality materials, functional and easy to use. Minimalist form allows for versatile use of the devices in various types of investments.

Compatible with digital control panels from groups: CDNP, Inspiro and Familio P/PV

Index	MP800 (G2)
Description	Digital handsfree video monitor for PV, flat front with 3.5" colour display and touch function icons.
Material	ABS plastic housing
Dimensions (mm)	198,3x81,5x26,5
Mountingu	Surface mounted
Available colours	White
Hanging up the handset	-
Display	3.5" color LCD
Installation type	Digital PV system: twisted pair cat. 5e or 6
Power supply	15VDC / 280 mA
Standby power consumption	~0,2W
Outputs	The " Circle" button (Function button F2): - on the system bus - 2 x ARK screw connectors: NO contact: 2A/24VDC (potential-free, separated from the system) - after holding down the 3s button
Inputs	1 x RJ45 socket (bus connection) 4 x ARK screw connectors audio and power line connection 1 x screw connector "RING": - connection of NO contact e.g. "bell" button - doorbell function (activated after a contact with the system GND) 2 x ARK screw connectors video signal connection
Attributes	<ul style="list-style-type: none"> - illuminated touch icons - hands-free - 7-stage adjustment of the sounds (ringing and call) - clear, interference-free sound - full privacy of the connection - intuitive and comfortable to use - possibility to work several receivers at one address - doorbell function (RING) - the monitor can receive any call address (after setting the address "0") - home automation: control of external devices, e.g. gate, barrier, roller shutters, lighting (some models of control panels or panels require an optional CDN-I/O relay module) - opening or controlling the home automation without answering the call - a colorful, expressive image - possibility to call up the image preview in the standby mode and the possibility to switch the preview on permanently - Built-in relay outputs activated independently for 1s (potential-free, separated from the system), - Auto open function (when the ringing is detected, the door will open) - optical indication of call silencing - call signalling - compatible with all digital devices from the CDNP, Inspiro and Familio P/PV groups

KK0119envB.2029






Aco sp. z o.o. sp. komandytowa
 ul. Diamentowa 7, 62-002 Suchy Las

T: +48 61 843 93 71
 E: biuro@aco.com.pl

NIP: 9721258093
 REGON: 362759523

www.aco.com.pl
www.support.aco.com.pl

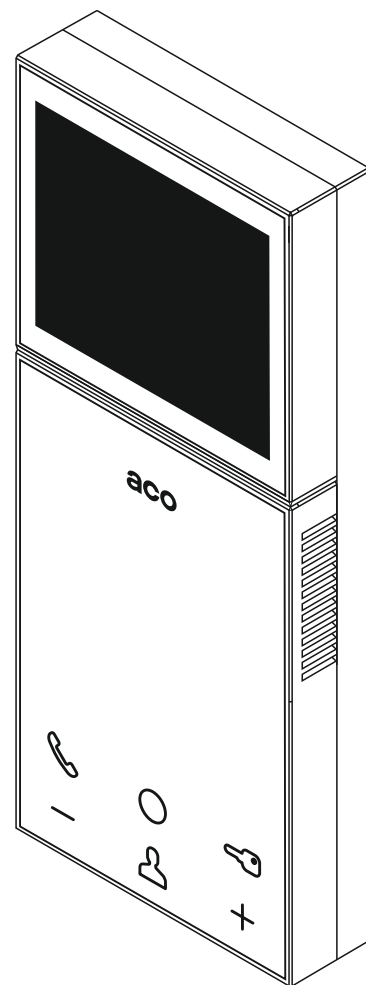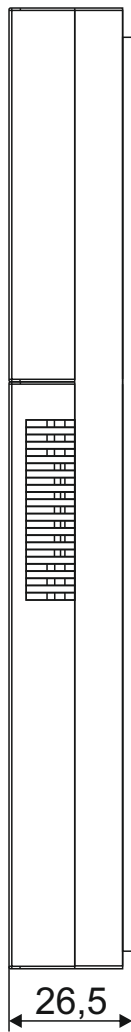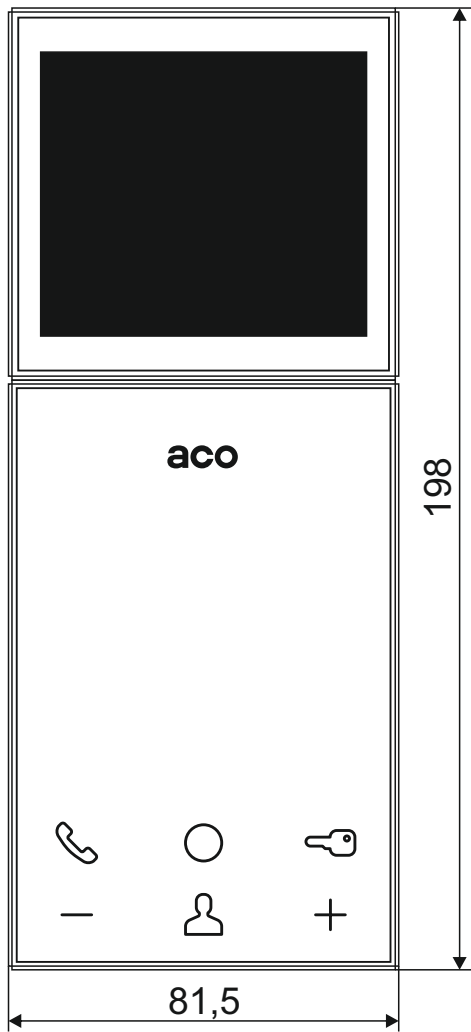

**CDNP
INSPIRO
Familio P/PV**

