


adapter 16 A (32668)

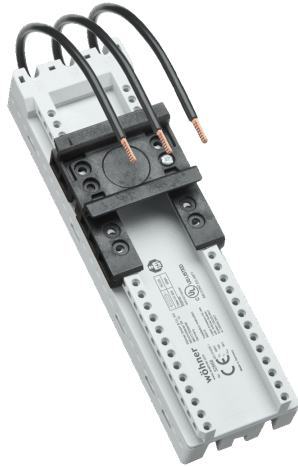

The picture may show a similar product.

Description

Part No.: **32668** 000A

EQUES® CrossBoard

adapter 16 A

1 adjustable mounting rail, with leads AWG 14 (2.5 mm²)

45 x 160

with CrossLink® interface

System

CrossBoard® 125A / 250A, CrossBoard® 800 A

Advantages of the product

Conductor ends ultrasonic compressed.

Click mechanism when pushing onto the CrossBoard®.

Product group 05

Subgroup 21

pack size 1

EAN 4021267326685

ECLASS 6.1 27370304
ECLASS 7.1 27370304
ETIM 4.0 EC001531
ETIM 5.0 EC001531

Approvals

Standards

IEC 61439-1:2020
UL 508

Approvals

IEC (CB) , UL



for UL feeder circuits >250V

type number: EQ45-BA

UL file: E123577, UL category (for USA): NMTR <https://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR7 <https://www.ul.com>

CCC approval: no certification required

Technical data

Details IEC

Standards

IEC 61439-1:2020

Electrical data IEC

rated current (IEC): 16 A

rated voltage (IEC) AC: 690 V

rated isolation voltage U_i AC: 800 V

rated surge voltage U_{imp} : 6 kV

power dissipation of the article:

The power dissipation at a typical load of 80 % results to 0.8 W.

(The power dissipation at full load would be 1.2 W.)

Details UL

Standards

UL 508

for UL feeder circuits >250V

Electrical data UL

rated current (UL): 12 A

rated voltage (UL) AC: 600 V

rated frequency (UL): 50 / 60 Hz

SCCR unprotected max.: 5 kA

3 cycles (without OPD) @ 600 V AC

SCCR protected max.: 65 kA

SCCR: 50 kA with JDDZ fuse Class CC 20 A / 600 V AC

65 kA with any NKJH/7 Comb. Motor Controller 12 A / 480 V AC

Mechanical data

W x H x D: 45 x 160 x 45

weight: 14.0 kg/100

poles: 3-pole

Application notes


For compact mounting of complete motor circuits with commercially available switchgear and safe mechanical and electrical connection to the CrossBoard®.

the short-circuit capacity of the combination of adapter and motor starter depends on the motor starter

for UL feeder circuits >250V

Accessories

accessories for mounting




32933 000A

extension module for direct starters

40 mm extension

for EQUES®CrossBoard adapters Comfort



32934 000A

extension set for reversing starters

40 mm extension

for EQUES®CrossBoard adapters Comfort

further accessories




32952 000A

positioning piece for Siemens S00 and S0



32979 000A

positioning piece for Eaton PKZ



32947 000

mounting rail 45 mm

for busbar adapters



32940 000A

mounting rail 54 mm

for busbar adapters

<https://pim.woehner.de/EN/INT/1000182079>