

# Electric strike 138.13- - - - - F91

Without striking plate, 24 V DC

## Product description

Model with basic equipment.

## Overview of Advantages

- Radius keeper, FaFix®, adjustable by 3 mm
- Compatible with current mortise locks
- Compatible with ProFix® 2 strike plates
- Optimal latch ramps for gentle interaction with the latch bolt
- Symmetrical design. DIN left/right as well as horizontal applicable

## Scope of delivery

- 1 piece electric strike

## Note

- Not an authorised locking system for doors along escape and rescue routes

## Technical data

Dimensions Height: 66 mm , Width: 20.1 mm , Depth: 25.5 mm

Version Standard electric strikes

Mounting symmetrical

Installation position universal

Configuration Frame component

With fixing No

With mechanical unlocking No

With feedback signal No

Opening direction according to DIN left/right

Waterproof No

Mounting method Installation

Compatible with Apple HomeKit No

Compatible with Google Assistant No

Compatible with Amazon Alexa No

IFTTT support available No

Pulse contact Yes

Adjustable keeper Yes

Adjustable electric strike No

Adjustable strike plate No

Latch bolt guide integrated Yes

For latch bolt slide No

Unlocking type Standard version

Permanent operation (100% power-on time) Yes

Mechanical unlocking No

Suitable for smoke protection door No

With strike plate No

Break-in resistance 3750 N

Max. latch preload DC 30 N

Min. preload DC 10 N

Latch adjustment range 3 mm

Load cycles for in-plant test 250000

Changeable connection No

Noise reduction No

Drill hole offset by 1 mm No

Unlocking time 0.1 s

Nominal operating voltage tolerance + - 10 %

Operating temperature range -15-40 °C

Certified in compliance with EN 14846

Suitable for fire door No

Latch version Standard latch


Voltage 24 V

Type of current DC

How they work Fail-locked

Protective diode No

Max. current consumption DC 100 mA

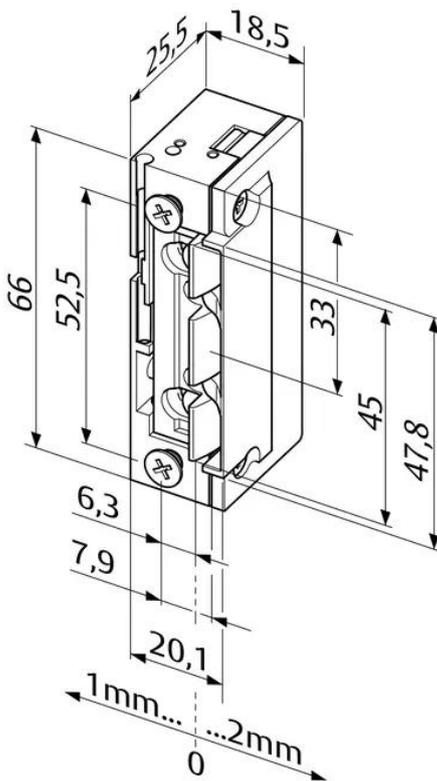

# Electric strike 138.13- - - - - F91

Without striking plate, 24 V DC



Continuous duty	24 V
Nominal resistance 12 V	240 Ohm
Clampable/ plug-in connection	No
<hr/>	
Article number	138.13-----F91
EAN	4042203374584