

Electric strike 138.23- - - - - E91

Without striking plate, 12 V DC

Product description

Model with monitoring contact as potential-free changeover contact, actuated by the latch bolt.

Overview of Advantages

- Radius keeper, FaFix®, adjustable by 3 mm
- Compatible with current mortise locks
- Compatible with ProFix® 2 strike plates
- Optimal latch ramps for gentle interaction with the latch bolt
- Symmetrical design. DIN left/right as well as horizontal applicable

Scope of delivery

- 1 piece electric strike

Note

- Not an authorised locking system for doors along escape and rescue routes

Technical data

Dimensions Height: 74 mm , Width: 20.1 mm , Depth: 25.5 mm

Version Standard electric strikes

Mounting symmetrical

Installation position universal

Configuration Frame component

With fixing No

With mechanical unlocking No

With feedback signal Yes

Opening direction according to DIN left/right

Waterproof No

Mounting method Installation

Compatible with Apple HomeKit No

Compatible with Google Assistant No

Type of current DC

How they work Fail-unlocked

Compatible with Amazon Alexa No

IFTTT support available No

Pulse contact Yes

Adjustable keeper Yes

Adjustable electric strike No

Adjustable strike plate No

Latch bolt guide integrated Yes

For latch bolt slide No

Unlocking type Standard version

Permanent operation (100% power-on time) Yes

Mechanical unlocking No

Suitable for smoke protection door No

With strike plate No

Use category according to EN 14846 3

Endurance according to EN 14846 A

Mass of the door, closing force in accordance with EN 14846 5

Suitable for fire/smoke protection doors according to EN 14846 0

Environmental condition according to EN 14846 0

Security – Burglary protection against entry in accordance with EN 14846 0

Protective effect of electrical function in accordance with EN 14846 1


Protection against electrical manipulation in accordance with EN 14846 1

Break-in resistance 3750 N

Max. latch preload DC 30 N

Min. preload DC 10 N

Latch adjustment range 3 mm

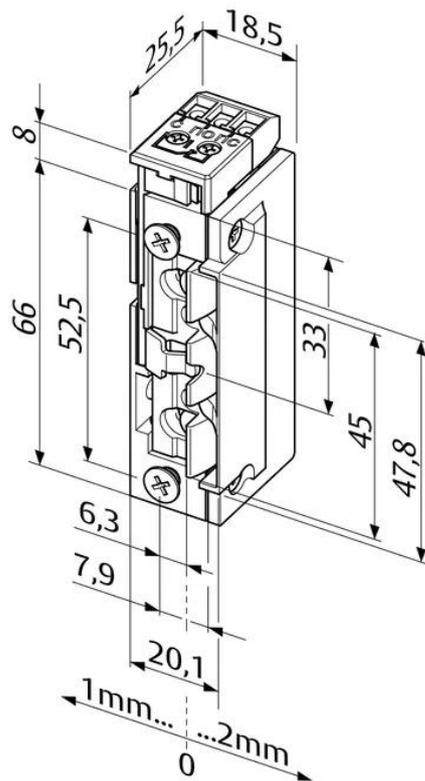

Electric strike 138.23- - - - - E91

Without striking plate, 12 V DC

Contact load capacity monitoring contact	1 A
Load cycles for in-plant test	250000
Changeable connection	No
Protective diode	No
Noise reduction	No
Drill hole offset by 1 mm	No
Unlocking time	0.1 s
Nominal operating voltage tolerance	+ - 10 %
Operating temperature range	-15-40 °C
Certified in compliance with	EN 14846
Suitable for fire door	No
Latch version	Radius keeper
Voltage	12 V
Max. current consumption DC	235 mA
Continuous duty	12 V
Nominal resistance 12 V	51 Ohm
Clampable/ plug-in connection	No
Article number	138.23-----E91
EAN	4042203376700