

Electric strike 138W- - - - - E91

Without striking plate, 12 V DC

Product description

Model with basic equipment.

Overview of Advantages

- Water-proof for use outdoors
- Protection rating IP54 for the electrical components
- Connecting cable 300 mm length
- Equipped with bipolar protective diodes
- Radius keeper, FaFix®, adjustable by 3 mm
- Compatible with current mortise locks
- Striking plates with 2 position settings available
- Symmetrical design. DIN left/right as well as horizontal applicable

Scope of delivery


- 1 piece electric strike

Note

- Not an authorised locking system for doors along escape and rescue routes

Technical data

Dimensions	Height: 66 mm , Width: 16 mm , Depth: 25.5 mm
Version	water-resistant electric strike
Latch version	Radius keeper
Mounting	symmetrical
Installation position	universal
Configuration	Frame component
With fixing	No
With mechanical unlocking	No
With feedback signal	No
Opening direction according to DIN	left/right
Waterproof	Yes
Mounting method	Installation
Compatible with Apple HomeKit	No
Compatible with Google Assistant	No
Type of current	DC
How they work	Fail-unlocked
Compatible with Amazon Alexa	No
IFTTT support available	No
Pulse contact	Yes
Adjustable keeper	Yes
Adjustable electric strike	No
Adjustable strike plate	No
Latch bolt guide integrated	No
For latch bolt slide	No
Unlocking type	Standard version
Permanent operation (100% power-on time)	Yes
Mechanical unlocking	No
Suitable for smoke protection door	No
With strike plate	No
Use category according to EN 14846	3
Endurance according to EN 14846	A
Mass of the door, closing force in accordance with EN 14846	5
Suitable for fire/smoke protection doors according to EN 14846	0
Environmental condition according to EN 14846	0
Security – Burglary protection against entry in accordance with EN 14846	0
Protective effect of electrical function in accordance with EN 14846	0
Protection against electrical manipulation in accordance with EN 14846	1

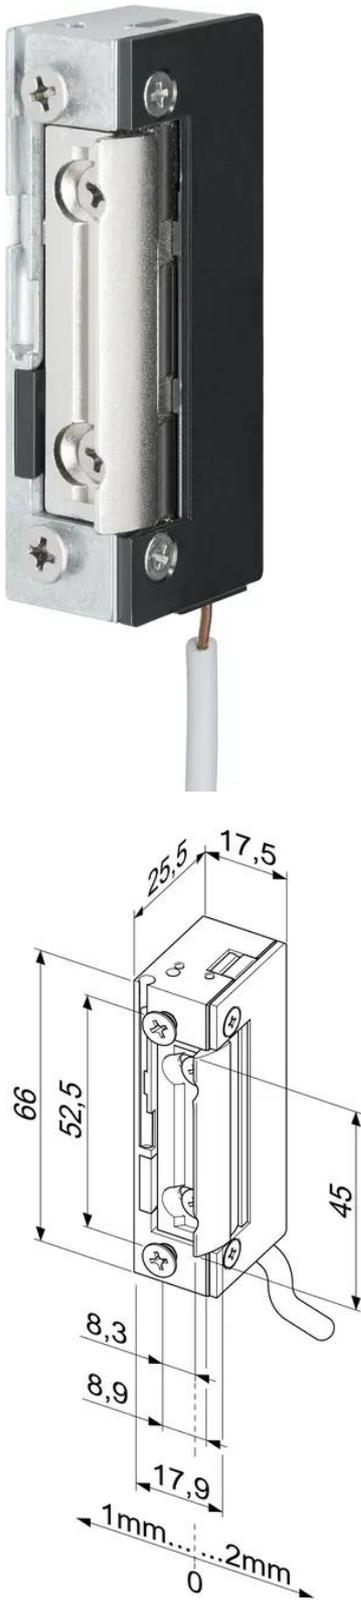

Electric strike 138W- - - - - E91

Without striking plate, 12 V DC

Break-in resistance	3750 N
Max. latch preload DC	30 N
Min. preload DC	10 N
Latch adjustment range	3 mm
Load cycles for in-plant test	250000
Changeable connection	No
Clampable/ plug-in connection	No
Protective diode	Yes
Noise reduction	No
Drill hole offset by 1 mm	No
Connecting cable	0.3 m
Unlocking time	0.1 s
Nominal operating voltage tolerance	+ - 10 %
Operating temperature range	-15-40 °C
Certified in compliance with	EN 14846
Suitable for fire door	No
Voltage	12 V
Max. current consumption DC	235 mA
Continuous duty	12 V
Nominal resistance 12 V	51 Ohm
Article number	138W-----E91
EAN	4042203634763