

Electric strike 138WR- - - - - E91

Without striking plate, 12 V DC

Product description

Model with monitoring contact, actuated by the latch bolt.

Overview of Advantages

- Water-proof for use outdoors
- Protection rating IP54 for the electrical components
- Connecting cable 300 mm length
- Equipped with bipolar protective diodes
- Radius keeper, FaFix®, adjustable by 3 mm
- Compatible with current mortise locks
- Striking plates with 2 position settings available
- Symmetrical design. DIN left/right as well as horizontal applicable

Scope of delivery

- 1 piece electric strike

Note

- Not an authorised locking system for doors along escape and rescue routes

Technical data

Dimensions Height: 67.3 mm , Width: 16 mm , Depth: 25.5 mm

Version water-resistant electric strike

Latch version Radius keeper

Mounting symmetrical

Installation position universal

Configuration Frame component

With fixing No

With mechanical unlocking No

With feedback signal Yes

Opening direction according to DIN left/right

Waterproof Yes

Mounting method Installation

Compatible with Apple HomeKit No

Compatible with Google Assistant No

Type of current DC

How they work Fail-unlocked

Compatible with Amazon Alexa No

IFTTT support available No

Pulse contact Yes

Adjustable keeper Yes

Adjustable electric strike No

Adjustable strike plate No

Latch bolt guide integrated No

For latch bolt slide No

Unlocking type Standard version

Permanent operation (100% power-on time) Yes

Mechanical unlocking No

Suitable for smoke protection door No

With strike plate No

Use category according to EN 14846 3

Endurance according to EN 14846 A

Mass of the door, closing force in accordance with EN 14846 5


Suitable for fire/smoke protection doors according to EN 14846 0

Environmental condition according to EN 14846 0

Security – Burglary protection against entry in accordance with EN 14846 0

Protective effect of electrical function in accordance with EN 14846 1

Protection against electrical manipulation in accordance with EN 14846 1

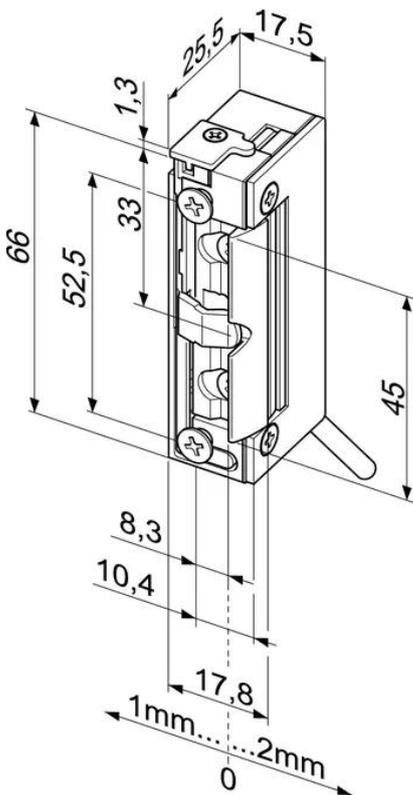

Electric strike 138WR-----E91

Without striking plate, 12 V DC

| | |
|--|---------------|
| Break-in resistance | 3750 N |
| Max. latch preload DC | 30 N |
| Min. preload DC | 10 N |
| Latch adjustment range | 3 mm |
| Contact load capacity monitoring contact | 1 A |
| Load cycles for in-plant test | 250000 |
| Changeable connection | No |
| Clampable/ plug-in connection | No |
| Protective diode | Yes |
| Noise reduction | No |
| Drill hole offset by 1 mm | No |
| Connecting cable | 0.3 m |
| Unlocking time | 0.1 s |
| Nominal operating voltage tolerance | + - 10 % |
| Operating temperature range | -15-40 °C |
| Certified in compliance with | EN 14846 |
| Suitable for fire door | No |
| Voltage | 12 V |
| Max. current consumption DC | 235 mA |
| Continuous duty | 12 V |
| Nominal resistance 12 V | 51 Ohm |
| Article number | 138WR-----E91 |
| EAN | 4042203650794 |