

Electric strike 143.13- - - - - Q35

Without strike plate, 12/24 V AC/DC eE, DIN right

Product description

Model with basic equipment.

Can also be used as a high-security strike

Overview of Advantages

- Radius keeper, FaFix®, adjustable by 2 mm
- 12-24 Volt voltage range for AC and DC operation
- New connection technology, can be replugged
- All models can be fitted as required (right/left/horizontally)
- Integrated suppressor diode
- Compatible with ProFix® 2 strike plates
- Preload modes 400N or 800N can be set

Scope of delivery

- 1 piece electric strike
- 1 operating manual

Technical data

Dimensions Depth: 28 mm , Height: 78.7 mm , Width: 23.1 mm

Mounting symmetrical
Installation position universal
Configuration Frame component

With fixing No
With mechanical unlocking No
With feedback signal No

Opening direction according to DIN left/right

Waterproof No
Mounting method Installation

Compatible with Apple HomeKit No
Compatible with Google Assistant No

Type of current AC/DC
How they work Fail-locked

Compatible with Amazon Alexa No
IFTTT support available No

Pulse contact Yes
Adjustable keeper Yes

Adjustable electric strike No
Adjustable strike plate No

Latch bolt guide integrated Yes
For latch bolt slide No

Unlocking type Standard version

Permanent operation (100% power-on time) Yes

Mechanical unlocking No

Suitable for smoke protection door Yes

With strike plate No

Use category according to EN 14846 3

Endurance according to EN 14846 X

Mass of the door, closing force in accordance with EN 14846 5

Suitable for fire/smoke protection doors according to EN 14846 E

Environmental condition according to EN 14846 0

Security – Burglary protection against entry in accordance with EN 14846 0

Protective effect of electrical function in accordance with EN 14846 0


Protection against electrical manipulation in accordance with EN 14846 1

Max. latch preload AC 800 N

Min. preload AC 400 N

Max. latch preload DC 800 N

Min. preload DC 400 N

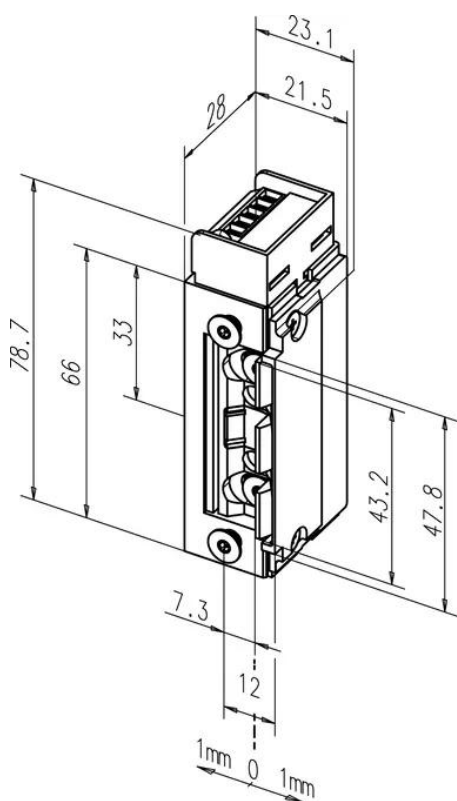

Electric strike 143.13- - - - - Q35

Without strike plate, 12/24 V AC/DC eE, DIN right

Latch adjustment range	4 mm
max. current consumption AC	165 mA
Max. current consumption DC	165 mA
Load cycles for in-plant test	250000
Changeable connection	Yes
Clampable/ plug-in connection	No
Protective diode	Yes
Noise reduction	No
Drill hole offset by 1 mm	No
Unlocking time	0.8 s
Latch version	Radius keeper
Version	Fire rated strike
Voltage	12-24 V
Break-in resistance	8000 N
Continuous duty	12-24 V
Operating temperature range	-15-40 °C
Certified in compliance with	EN 14846; VDS
Suitable for fire door	Yes

Article number	143.13-----Q35
EAN	4042203460942