

# Electric strike 331UF-----F94

Without strike plate, 24 V DC, DIN left

## Product description

Model with adjustable FaFix® latch which features keeper alignment.

The 331UF series is guaranteed to work reliably in interlock systems, on soundproofed doors and on doors where pressure on the keeper is expected due to the structural design.

## Overview of Advantages

- Sturdy design for demanding requirements
- Recovery diode
- Reliable unlocking under preload
- FaFix® latch with 2 mm adjustment range

## Scope of delivery


- 1 piece electric strike

## Note

- Can only be used as a supplementary locking device on fire doors

## Technical data

Dimensions	Height: 134 mm , Width: 23 mm , Depth: 39 mm
Version	Escape door strikes
Latch version	Standard latch
Mounting	asymmetrical
Installation position	universal
Configuration	Frame component
With fixing	No
With mechanical unlocking	No
With feedback signal	No
Waterproof	No
Mounting method	Installation
Compatible with Apple HomeKit	No
Compatible with Google Assistant	No
Type of current	DC
How they work	Fail-unlocked
Compatible with Amazon Alexa	No
IFTTT support available	No
Pulse contact	Yes
Adjustable keeper	Yes
Adjustable electric strike	No
Adjustable strike plate	No
For latch bolt slide	No
Unlocking type	Standard version
Permanent operation (100% power-on time)	Yes
Mechanical unlocking	No
Suitable for smoke protection door	Yes
With strike plate	No
Break-in resistance	5000 N
Max. latch preload DC	5000 N
Min. preload DC	5000 N
Latch adjustment range	2 mm
Load cycles for in-plant test	250000
Changeable connection	No
Clampable/ plug-in connection	No
Protective diode	No
Noise reduction	No
Drill hole offset by 1 mm	No
Unlocking time	0.1 s
Operating temperature range	-15-40 °C
Certified in compliance with	EltVTR
Suitable for fire door	Yes
Voltage	24 V
Opening direction according to DIN	left

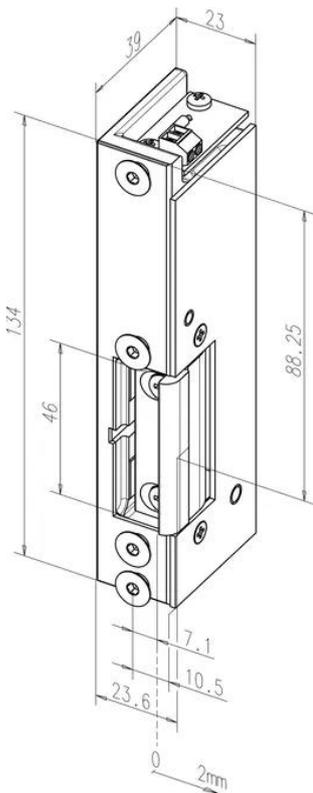

# Electric strike 331UF-----F94

Without strike plate, 24 V DC, DIN left



Max. current consumption DC	160 mA
Continuous duty	22-26 V
Nominal resistance 12 V	150 Ohm
Nominal operating voltage tolerance	+ - 2 V

Article number	331UF-----F94
EAN	4042203161139