

Escape door strike 332.238- - - - E91

Without striking plate, 12 V DC

Product description

The compact construction form of the effeff 332.238 escape door strike allows rapid, uncomplicated mounting in a wide variety of profiles and door frames

Overview of Advantages

- radius keeper
- Small symmetrical construction shape
- Min. 2000 N, max. 3000 N holding force in accordance with prEN 13637
- Unlocking under pre-load with 100% holding force
- Monitoring contact is potential-free and armature contact is non-isolated *
- DL/DR and horizontal universal installation position
- Compact fitting dimensions
- Adjustable FaFix® latch: 2 mm adjustment range with 0.5 mm increments
- Compatible with ProFix® 2 strike plates
- Monitoring contact integrated in the housing
- Monitoring flap moves together with the FaFix® screw-on attachment, i.e. the switching point always remains the same

Scope of delivery

- 1 piece escape door strike

Note

- Can only be used as a supplementary locking device on fire doors
- * Coupling Relay 7480 is required for parallel operation.
- Armature contact not potential-free. Operation with effeff control terminals without coupling relay possible.

Technical data

Dimensions Height: 78.7 mm , Width: 23 mm , Depth: 28 mm

Version Escape door strikes

Operating temperature range -15-40 °C

Latch version Radius keeper

Mounting symmetrical

Installation position universal

Configuration Frame component

With fixing No

With mechanical unlocking No

With feedback signal Yes

Opening direction according to DIN left/right

Waterproof No

Mounting method Installation

Compatible with Apple HomeKit No

Compatible with Google Assistant No

Type of current DC

Compatible with Amazon Alexa No

IFTTT support available No

How they work Fail-unlocked

Pulse contact No

Adjustable keeper Yes

Adjustable electric strike No

Adjustable strike plate No

Latch bolt guide integrated No

For latch bolt slide No

Protective diode Yes

Noise reduction No

Unlocking type Standard version

Permanent operation (100% power-on time) Yes


Mechanical unlocking No

Suitable for fire door Yes

Suitable for smoke protection door Yes

Forend shape without

With strike plate No

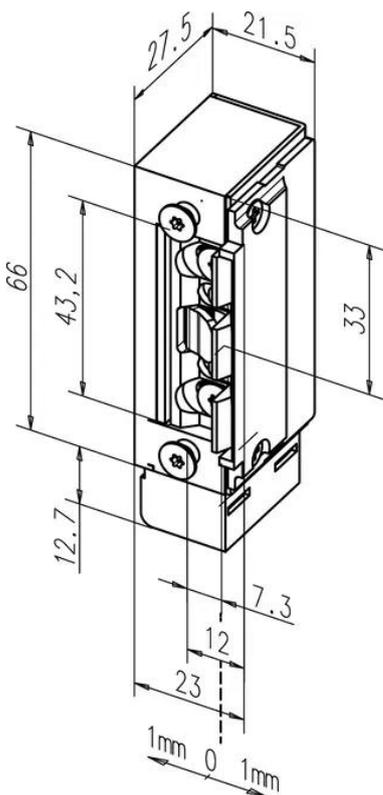

Escape door strike 332.238- - - - E91

Without striking plate, 12 V DC



Unlocking time	0.1 s
Break-in resistance	3000 N
Max. latch preload DC	3000 N
Min. preload DC	2000 N
Contact load capacity monitoring contact	1 A
Latch adjustment range	2 mm
Load cycles for in-plant test	500000
Changeable connection	No
Clampable/ plug-in connection	No
Drill hole offset by 1 mm	No
Certified in compliance with	ElVTR; EN13637
Voltage	12 V
Max. current consumption DC	180 mA
Continuous duty	13.2 V
Nominal resistance 12 V	63 Ohm
Nominal operating voltage tolerance	+ - 10 %

Accessories/Individual parts

Order number	Product
807-10-----00	Model 807-10 Adjustable; 110 x 24 mm
807-11-----00	Model 807-11 Adjustable; 135 x 20 mm
807-12-----00	Model 807-12 Adjustable; 110 x 24 mm; radius forend
807-13-----00	Mortise latch bolt lock model 807 radius Adjustable; 110 x 20 mm; radius strike plate
7480-----E00	Coupling Relay Model 7480 12 V for escape door 332®
Article number	332.238-----E91
EAN	4042203322981