


# Electric strike 9314VGL10- - - E31

Including housing, 12 V DC eE

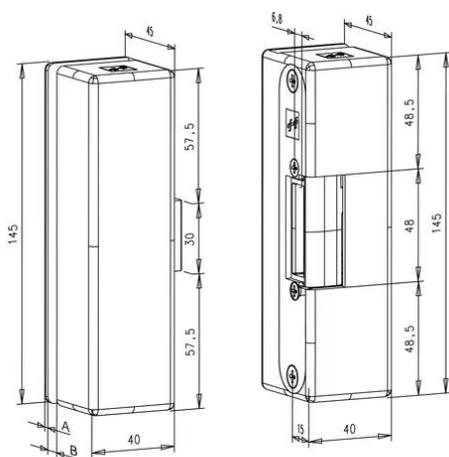

		Glasstärke						
		8	9	10	11	12	13	15
Variable Maße	A	5	4,5	4	3,5	3	2,5	2
	B	8,1	9,1	10,1	11,1	12,1	13,1	15,1

## Product description

Compact, functional design, modern environment-neutral design in aluminium. Surface of the counter plate with 6 mm adjustment facility.

Thanks to its compact design and problem-free installation, the electric strike is particularly suited for all-glass doors with overhead lighting or glass side sections. No complicated tools for installation – simply stick in place (the special adhesive is included with every electric strike). The aluminium masonry box can be used for two electric strike versions: fail-locked and fail-unlocked. Modern, neutral design of the electric strike fitting. This consists of an electric strike section and a counterpart with identical dimensions.

## Overview of Advantages

- Can be mounted DIN right or left by turning over 180°

## Scope of delivery

- 1 electric strike, including housing

## Technical data

Dimensions	Height: 145 mm , Width: 45 mm , Depth: 40 mm
Version	Glass door strike
Latch version	other
Mounting	asymmetrical
Installation position	universal
Configuration	complete
With fixing	No
With mechanical unlocking	No
With feedback signal	No
Opening direction according to DIN	left/right
Waterproof	No
Mounting method	Installation
Compatible with Apple HomeKit	No
Compatible with Google Assistant	No
How they work	Fail-locked
Compatible with Amazon Alexa	No
IFTTT support available	No
Pulse contact	Yes
Adjustable keeper	No
Adjustable electric strike	No
Unlocking type	Standard version
Mechanical unlocking	No
Suitable for smoke protection door	No
Break-in resistance	6500 N
Load cycles for in-plant test	250000
Changeable connection	No
Clampable/ plug-in connection	No
Protective diode	No
Noise reduction	No
Drill hole offset by 1 mm	No
Unlocking time	0.8 s
Operating temperature range	-15-40 °C
Suitable for fire door	No
Voltage	12 V
Type of current	DC
For latch bolt slide	No
Permanent operation (100% power-on time)	Yes
Max. latch preload AC	100 N
Min. preload AC	80 N
Max. latch preload DC	50 N
Min. preload DC	40 N
max. current consumption AC	125 mA
Max. current consumption DC	200 mA
Continuous duty	11-13 V
Nominal resistance 12 V	60 Ohm

# Electric strike 9314VGL10- - - E31

Including housing, 12 V DC eE



Nominal operating voltage tolerance + - 1 V

---

Article number	9314VGL10---E31
EAN	4042203291942

---