


Electric strike 9334VGL10- - - E91

Including housing, 12 V DC

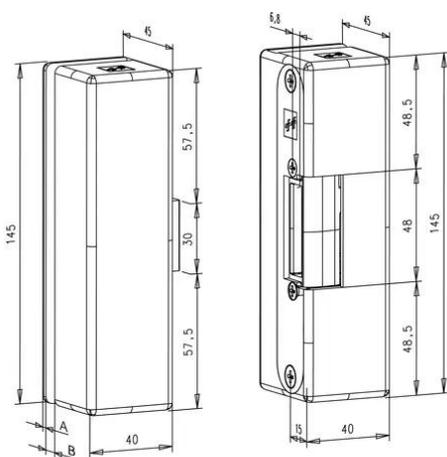

		Glasstärke						
		8	9	10	11	12	13	15
Variable Maße	A	5	4,5	4	3,5	3	2,5	2
	B	8,1	9,1	10,1	11,1	12,1	13,1	15,1

Product description

Compact, functional design, modern environment-neutral design in aluminium. Surface of the counter plate with 6 mm adjustment facility.

Thanks to its compact design and problem-free installation, the electric strike is particularly suited for all-glass doors with overhead lighting or glass side sections. No complicated tools for installation – simply stick in place (the special adhesive is included with every electric strike). The aluminium masonry box can be used for two electric strike versions: fail-locked and fail-unlocked. Modern, neutral design of the electric strike fitting. This consists of an electric strike section and a counterpart with identical dimensions.

Overview of Advantages

- Can be mounted DIN right or left by turning over 180°

Scope of delivery

- 1 electric strike, including housing

Technical data

Dimensions	Height: 145 mm , Width: 45 mm , Depth: 40 mm
Version	Glass door strike
Latch version	other
Mounting	asymmetrical
Installation position	universal
Configuration	complete
With fixing	No
With mechanical unlocking	No
With feedback signal	No
Opening direction according to DIN	left/right
Waterproof	No
Mounting method	Installation
Compatible with Apple HomeKit	No
Compatible with Google Assistant	No
Type of current	DC
How they work	Fail-unlocked
Compatible with Amazon Alexa	No
IFTTT support available	No
Pulse contact	Yes
Adjustable keeper	Yes
Adjustable electric strike	No
Unlocking type	Standard version
Permanent operation (100% power-on time)	Yes
Mechanical unlocking	No
Suitable for smoke protection door	No
Break-in resistance	3000 N
Max. latch preload DC	0 N
Min. preload DC	10 N
Load cycles for in-plant test	250000
Changeable connection	No
Clampable/ plug-in connection	No
Protective diode	No
Noise reduction	No
Drill hole offset by 1 mm	No
Unlocking time	0.1 s
Operating temperature range	-15-40 °C
Suitable for fire door	No
Voltage	12 V
Max. current consumption DC	195 mA
Continuous duty	11-13 V
Nominal resistance 12 V	61 Ohm
Nominal operating voltage tolerance	+ - 1 V

Article number 9334VGL10---E91

Electric strike 9334VGL10- - - E91

Including housing, 12 V DC

EAN

4042203143128

