


25.835.1000

HID Lampholders GX10

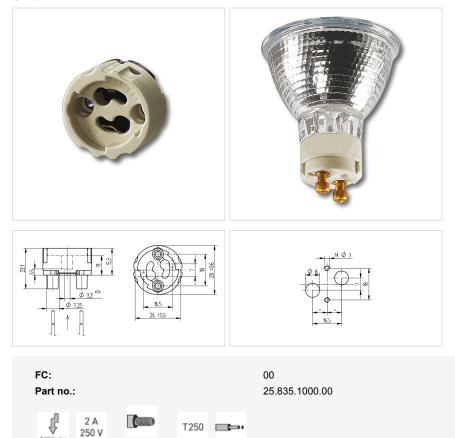

## Description

5 kV/pulse

• For 2 ignition cables

• Suitable for light fittings of protection class II in accordance with EN 60598-1 2008.

• Height of screw head max. 1.5 mm (e.g. countersunk screw)

max. 1,8 mm

• The correct function is obtained by screw mount.

Symbol Zündspannung:	5kV pulse rated
Product name:	Lampholder GX10
Mounting method 1:	Screw mount
Material:	Housing: Ceramic / PPS
cURus file no.:	E-93328
Weight:	10
Connection:	without cable, single pushwire terminals
Approval:	cURus
Socket:	GX10
Pkg.:	500