



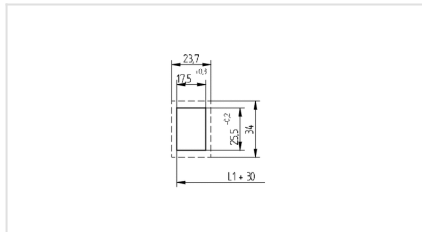

Technik für Licht  
Komponenten · Optik · Automation

## 27.660.U806

Linear Fluorescent Lampholders: Water and Dustproof  
G5 Water and Dustproof Lampholders Snap in foot 25.5 x 17.5 mm

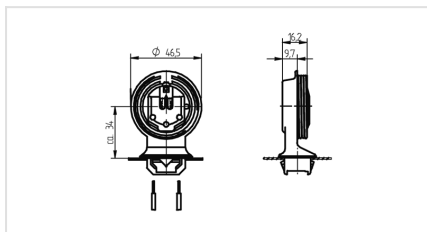

**Color:**

weiß

**FC:**

50

**Part no.:**

27.660.U806.50



0,5 - 1,0 mm<sup>2</sup>



IP 67



T 140



1,4 - 2,0

# Description

- Max. permissible temperature at front of face plate (T):140°C
- 
- Max. permissible temperature at the rear of the lampholder (Tm): 110° C
- 
- Quick and easy wiring achieved by tapered wiring channels
- 
- Tensile interior of lampholder provides a lamp length tolerance compensation of 3 mm per pair of lampholders
- 
- Rating: 500 V (for operation with electronic ballasts)
- 
- Suitable gaskets: 27.230.-728, 27.240.-707

Product name:	Lampholder Water and Dustproof
LED type:	G5 Wasser- und Staubdicht
Farbe:	white
Mounting method 1:	Snap-in foot 25.5 x 17.5 mm
Material:	Housing: PC Rotor: PBT
Weight:	20
Gasket:	Gasket: without foot gasket
Single- / twin lampholder:	Single lampholder
Lamp center:	34
Material thickness:	1.4 - 2.0
Protection class according to IEC:	IP 67
T-Marking:	140
Wiring:	through snap in foot
Pkg.:	200