

Heat shrinkable straight-through joint
for unarmoured polymeric cables

Universally suitable for connecting polymeric cables or conductors insulated with PVC, PE and XLPE (e.g. N(A)YY, NYM, TT). Suitable for compression connectors on aluminium or copper cables.



Product description

Article name	SMH4 1.5-6
Article number	145246
Optional accessory	Compression connectors (see Connecting technology)


Characteristics

Compact dimensions
Wide conductor and cross-section range
Resistant to chemical agents
Resistant to alkaline earth elements
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
Transversely waterproof
High electrical insulating values
High mechanical strength

Applications

Indoor
Outdoor
Underground
Water
Installation ducts
Ductwork

Technical Data

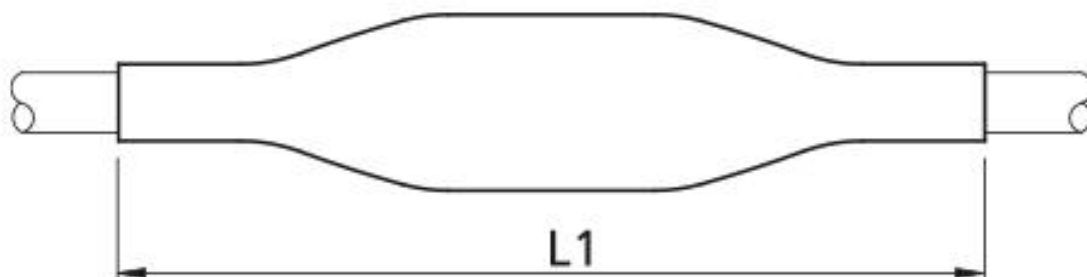

Article name	SMH4 1.5-6
Article number	145246
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L1	200 mm
Nominal cross section Polymeric cable unarmoured per conductor 4x min	1.5 mm ²
Nominal cross section Polymeric cable unarmoured per conductor 4x max	6 mm ²

Commercial Data

Article name	SMH4 1.5-6
Article number	145246
Delivery scope	Outer sleeve
	Inner sleeves
	Cleaning tissue
	Emery cloth
	Installation instruction
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900
EAN/GTIN	4010311000244

Packaging data

Packaging type	Case	Pal. OW
Content quantity	10	360
Unit of measure	Piece	Piece
Lenght (mm)	270	1200
Width (mm)	195	800
Height (mm)	170	1130
Net weight (kg)	0.83	29.88
Gross weight (kg)	1.13	48.08