

## DR111 XENON Aluminium reflector 8000h



- \* Aluminium reflector.
- \* A wide selection of beam apertures for a lamp which is usually used for long distance directional lighting.
- \* The long lifetime is fundamental for reducing re-lamping costs.

### Item Characteristics

Code	1D0792LX
Lamp Voltage	12 V
Nominal Power	75 W
Base	G53
Lamp Current	6,25 A
Nominal Flux	653 LUMEN
Colour temperature	3000 K
Opening beam	24°
Diameter	111 mm
Lenght	57 mm

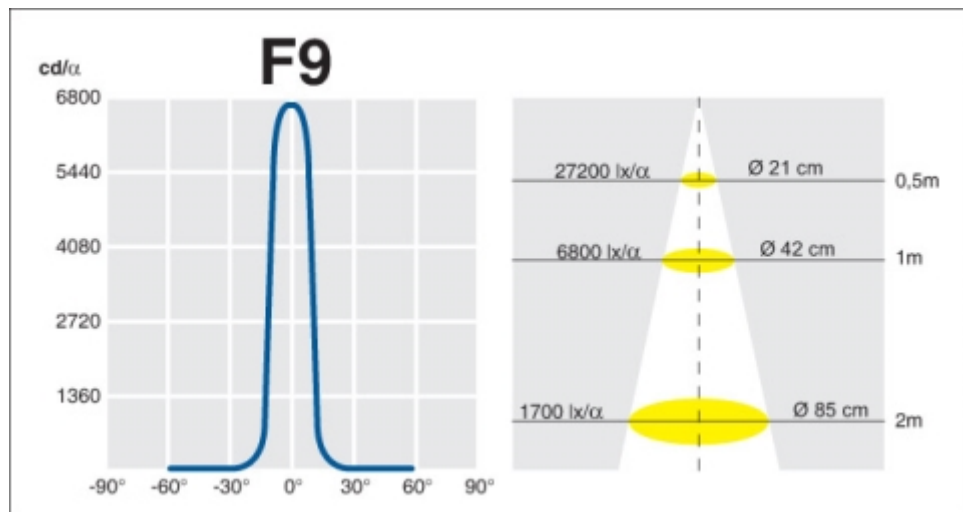
### Performance

Axis cd	5300
Alpha	0,85
Photometry	F9
Irc/Ra	100
Lifetime	8000 h
Energy Class	C
kWh/1000h	80

### Tech Info

Dimmable	YES
Operating Position	360°
UV Stop quartz bulb	YES
Open fittings	YES
Number of ON-OFF cycles	25000
Power Factor	1
Warm-up time up to 60 % of the full light output	Instant Full Light
Lamp start time	<0,2s
T (°C) Working environment Temp.	-15°C / +35°C
Fulfilled Directives and norms	2011/65/UE * RoHS EN60432-3 * Anno 2013 2010/30/EU * Energy Consumption 874/2012 * Regulation for Energy Labelling 2009/125/CE * Progettazione Eco Compatibile 1194/2012 * Progettazione Eco Compatibile

### Spectrocolorimetry and Photometry

**Shipping info**

Single pack dimensions L x H x D (mm)	85 x 112 x 85
Item barcode	8011905055240
Pack	6 pz
Inner pack dimensions L x H x D (mm)	268 x 123 x 185
Master barcode	8011905745868
Master pack dimensions L x H x D (mm)	560 x 270 x 385