

## ECTC1550

### PLIABLE PVC CONDUIT 33212 Ø50 mm - 25 m



IMMAGINE  
RAPPRESENTATIVA

EC  
REPRESENTATIVE  
IMAGE

Conduits and fittings > Conduits > Corrugated conduits >  
Series tc15 - pvc - class 33212 - 750 n > plastic conduits >  
Black

#### Technical Symbols/Marks/Approvals

UL94  
V0

GWT  
960°

CE

RoHS II

MADE  
IN  
ITALY

#### Norms

EN 61386-1 EN 61386-22


## Etim

GROUP EG000002 - Pipes/hoses for cable installation

CLASS EC001174 - Plastic installation tube

|                                                    |                            |                                               |                            |                                   |         |
|----------------------------------------------------|----------------------------|-----------------------------------------------|----------------------------|-----------------------------------|---------|
| Flush-mounted installation                         | Yes                        | Material                                      | Polyvinyl chloride (PVC)   | Halogen free                      | No      |
| Colour                                             | Black                      | RAL-number                                    | 9005                       | UV resistant                      | No      |
| Suitable for underground installation              | No                         | Operating temperature                         | -5-60 °C                   | Bending strength                  | Pliable |
| Compressive strength class according to EN 61386-1 | Medium (class 3 / 2 Joule) | Impact strength class according to EN 61386-1 | Medium (class 3 / 2 Joule) | With sleeve                       | No      |
| Fire retardant version                             | Yes                        | Surface mounting                              | No                         | Suitable for installation on wood | No      |
| Suitable for hollow wall installation              | No                         | Suitable for concrete installation            | No                         | Machine and systems installation  | No      |
| Suitable for underfloor installation (screed)      | No                         | Suitable for outdoor installation             | No                         | Inner diameter                    | 39.5 mm |
| Outer diameter                                     | 50 mm                      | High conducting inner coating                 | No                         | With metre indication             | No      |

## Documentation available for download

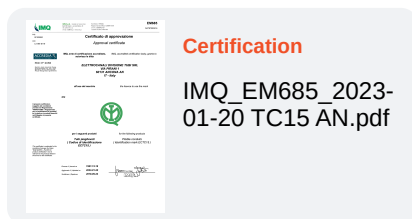

#### Certification

IMQ\_EM685\_2023-  
01-20 TC15 AN.pdf

## Barcode




8054320285359

### Cardboard

25 MT

0.62x0.62x0.24 [m]

5.27 [kg]



8057711598267

### Pallet

800 MT

0.8x1.2x2.5 [m]

168.64 [kg]