



22  
kWh/1000h

A  
energy class

69  
lumens/watt

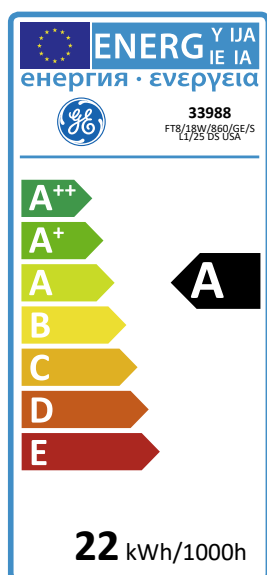
## T8 Triphosphor - Direct shipment from USA (LFL)

FT8/18W/860/GE/SL1/25 DS USA





33988

### Product information

Polylux XLR™ lamps should be the natural choice for all fluorescent lighting applications. The excellent colour reproduction flatters skin tones making people appear more natural, and makes merchandise appear more vibrant and colourful.



### Application areas

-  Retail
-  Office
-  Education
-  Industrial

## Product data

Product Code	33988
Bulb Shape	Tubular
Bulb Finish	Coated
Regulatory comment	CE Certified
Bulb maximum overall diameter [mm]	28
Maximum Overall Length [mm]	604
Cap to Cap Length (Max) [mm]	589.8
Gross weight per piece [g]	116
Mercury Content [mg]	<2,9 mg
Product colour	Daylight
Brand	GE Lighting
Cap/Base	G13

## Performance data

Colour Code	865
Colour (product colour)	Daylight
Lumen at 25°C [lm]	1250
Weighted energy consumption [kWh/1000h]	22.0
Rated efficacy 25°C EM preheat	69
Energy efficiency class (EEC)	A
Rated Life [h]	{EM 3-hour} : 15000
Rated median life on electromagnetic (EM / CCG) ballast on IEC 12-hour cycle	18000
Rated median life on electronic (HF / ECG) ballast on IEC 12-hour cycle	23000
Rated median life on electronic (HF / ECG) ballast on IEC 3-hour cycle	20000
Nominal correlated colour temperature (CCT) [K]	6400
Nominal lumens [lm]	1250
Colour Rendering Index (CRI) [Ra]	80

## Electrical data

Rated power [W]	18.0
Design Lamp ambient temperature [°C]	25
Starting ambient temperature range	-15°C ...50°C
Nominal power [W]	18

## Logistic data

DUN Code	10043168339886
EAN Code	0043168126069
Pack Quantity	25
Inner pack type	sleeve
Outer pack type	outer box
Layer quantity EUR	250
Layer quantity UK	300
Pallet quantity EUR (PC)	1500
Pallet quantity UK (PC)	1800
Outer case size	630x150x145mm
Product status	Phased-out

## Downloads & Links

[Go to the catalog site \(HTTP\)](#)