



GE
Lighting



2090
kWh/1000h

A+
energy class

95
lumens/watt

Sportlight™ Tubular Clear SPL2000/220V/T/H/640/E40 36078

Product information

Sportlight™ lamps are high light output Metal Halide Lamps with high colour rendering index. They are designed for use in sport stadia and other recreational facilities.

Application areas




Road and tunnel



Street and pedestrian



Commercial areas

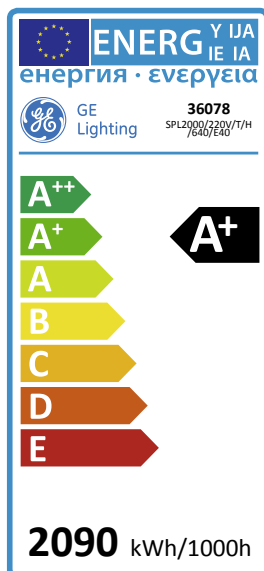

Product data

Cap/Base	E40
Bulb Shape	Tubular
Bulb Finish	Clear
Maximum Overall Length [mm]	430
Light Center Length [mm]	287
Net weight per piece [g]	630
Gross weight per piece [g]	1200
Operating position	H75 - Horiz 75 degrees
Mercury Content [mg]	265
Brand	General Electric (GE)

Performance data

Colour Code	640
Colour Rendering Index (CRI) [Ra]	65
Nominal correlated colour temperature (CCT) [K]	4000
Nominal lumens [lm]	180000
Rated Lumens [lm]	180000
Nominal efficacy [LpW]	95
Rated efficacy [LpW]	94.7
Energy efficiency class (EEC)	A+
Nominal chromaticity coordinate X	0.4
Nominal chromaticity coordinate Y	0.4
Weighted energy consumption [kWh/1000h]	2090


Electrical data

Nominal power [W]	1900
Rated power [W]	1900
Nominal lamp voltage [V]	125
Lamp Current [A]	16.5
Design Ambient Temperature [°C]	25
Run-up time (sec)	240
Hot restart time (sec)	420
Ballast Required	Yes


Logistic data

DUN Code	43168360784
EAN Code	0
Pack Quantity	4
Layer quantity	24 EUR, 24 UK
Layer quantity EUR	24
Layer quantity UK	24
Pallet quantity EUR (PC)	24
Pallet quantity UK (PC)	24
Outer case size	395 x 390 x 625 (mm)

Lumen maintenance data

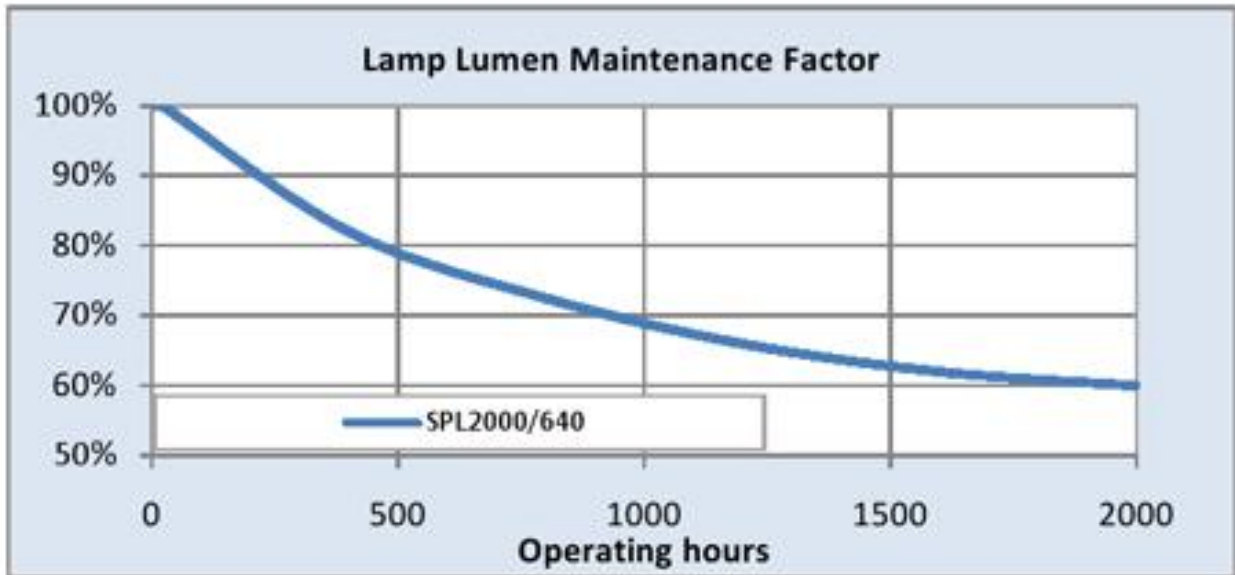

Survival data

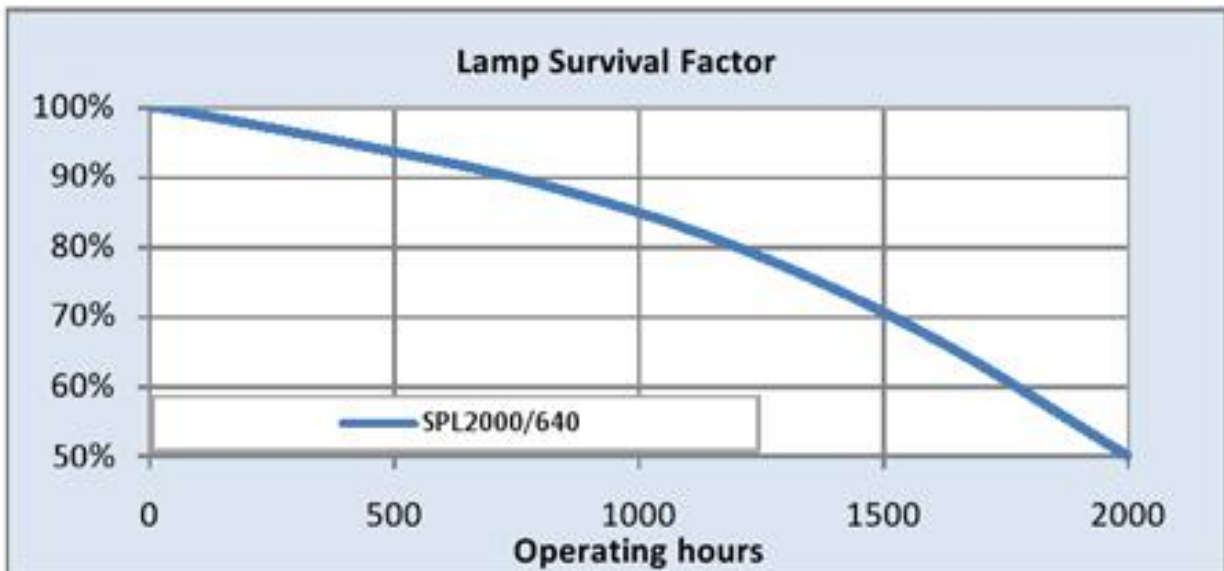

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[HID Lamps Spectrum Catalogue \(EN\) \(PDF\)](#)

[Sportlight™ Lamps Data sheet \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)