

LED Bright Stik™ E14 7W



DATA SHEET

Product information

LED Bright Stik™ illuminates spaces with light instantly. Its sleek cylindrical shape fits in place of a traditional incandescent bulb - and some sockets where a traditional bulb or CFL doesn't fit. With Bright Stik E14, you can now fit in almost all the fixtures where the traditional decorative lamps can't.

Features & benefits

- LED technology for energy saving
- Redesigned shape with multiple advantages
- To fit in more fixtures compared to CFL
- Optimised for omni-directional light distribution
- Space-saving benefits on-shelf
- 240 degree Beam angle
- Rated life 10 000 hours L70
- 3 colour options - 3000K, 4000K & 6500K
- Always ready - instant brightness
- No mercury - worry-free use and disposal

Applications areas




Hospitality



Retail



Home

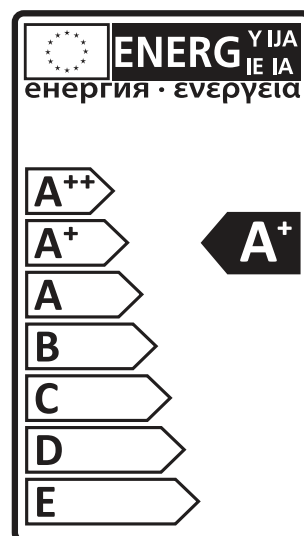

GE imagination at work

Specification summary

Multipack

Product Code	Product Description	Wattage [W]	Volts [V]	Lumen [lm]	CCT [K]	Line Freq [HZ]	LM/W	Beam Angle [°]
93047281	LED 7/STIK/830/100-240/E14/F 3/15	7	100-240	550	3000	50/60	79	240
93047524	LED 7/STIK/840/100-240/E14/F 3/15	7	100-240	600	4000	50/60	86	240
93048805	LED 7/STIK/865/100-240/E14/F 3/15	7	100-240	600	6500	50/60	86	240

Single pack

93047729	LED 7/STIK/830/100-240/E14/F 1/15	7	100-240	550	3000	50/60	79	240
93047727	LED 7/STIK/840/100-240/E14/F 1/15	7	100-240	600	4000	50/60	86	240
93047728	LED 7/STIK/865/100-240/E14/F 1/15	7	100-240	600	6500	50/60	86	240

Operation and maintenance

- Store and use the lamps the same way as traditional lamps.
- Check your fixtures are properly wired and don't deliver voltage spike to lamps causing overheating/failure.
- Ambient temperature range -20° C to 40°C
- 240 degree Beam angle
- Lamps should be kept free from contamination.
- Good condition of the lamp-holder contacts is important to ensure proper operation of lamp.
- Ensure lamp is cool before removing.
- Switch off mains supply before installing/removing lamp.
- Non-dimmable
- CRI>80

Dimensions [mm]

