




The widest range of flush-mounting switchboards and distribution boards available on the market today. Seven families designed to offer solutions in the residential and advanced tertiary sectors, also available in Halogen Free material. Versions from 2 to 72 modules, degrees of protection from IP40 to IP55 and specific versions also for plasterboard. Furthermore, the offer includes Multimedia Enclosures in compact (36 modules) and complete (54 modules) versions, both compliant with what is suggested by the CEI 306-2 guide.

Érintésvédelmi osztály	II (IEC 61140 szabvány szerint)	Szín	Fehér
Külső méretek HxMxM (mm)	328x338x108	IP védettség szintje	IP40
Beszereles	Süllyesztett elosztószekrények	Kimenő teljesítmény	25
Ütés állóság	IK08	Névleges feszültség	400V
Ajtó színe	Füstszínű átlátszó	Modulok száma EN 50022 (DIN 35) szabvány szerinti modulok esetén	24+2 (12x2)
Névleges áramerősség	125 A	Izzóhuzalos vizsgálat	650 °C
Falakhoz	Falazott	Üzemi hőmérséklet	-15 ÷ +60°C
Alapanyag típusa	Halogénmentes a 60754-2 szabvány szerint	Hőállóság (golyós nyomópróba)	70°C
Szabvány	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49	Szigetelő feszültség	750 V
Maximálisan beszerelhető sorkapcsok száma	2 x 12 modul		

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Not resistant	Limited resistance	Not resistant	Limited resistance	Limited resistance	Not resistant	Not resistant	Limited resistance	Limited resistance	Limited resistance

DIMENSIONAL

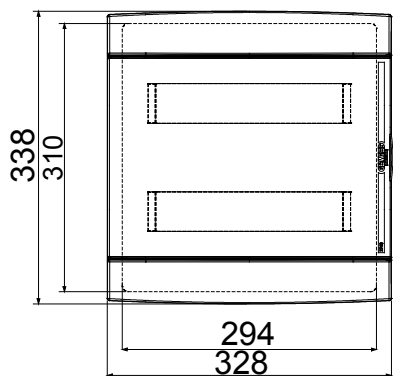



TECHNICAL SYMBOLOGY



IP
IP40

IK
IK08

GWT
650 °C



STANDARDS/APPROVALS

