



Luminaire


Vali

176-600F-10GGE/930, W




When you combine design with functionality, you get the Vali family of lighting. You can point this cylindrical track luminaire with 4 angles of 21°, 28°, 40°, 63° at the required object as needed. Vali has a luminous efficacy of up to 90 lm / W and has a light source with a colour rendering of Ra>90, to provide the perfect illumination of an object.

Technical drawing

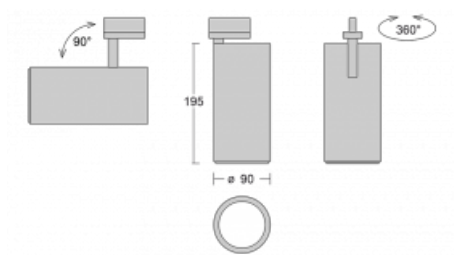

Type of installation	3 circuit track
Light distribution	Direct
Luminaire shape	Circular
Colour of the luminaires	White
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire 3 circuit track
Dimensions	ø 90 mm × 195 mm
Weight	1.1 kg
Light source	LED MODUL
Type of optical system	Reflector
Luminous flux	1960 lm ± 10 %
Colour Temperature	3000 K warm white
Luminous efficacy	96 lm/W
MacAdam	3
Colour rendering index	90
Beam angle	40°
UGR max. X=4H Y=8H, ρ=70,50,20	16.9

Curve

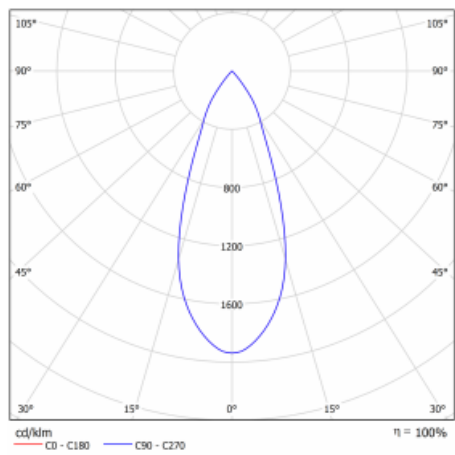

Luminaire power input	20.4 W ± 10 %
Connection of the luminaires	Electronic ballast non-dimmable
Electrical voltage	220-240V
Frequency	50-60Hz

⊕ CE IP 20

Realization



Downloads

[Installation instructions](#)[Photos](#)

Accessories



00-01000
reflector 21°



00-01001
reflector 28°



00-01002
reflector 40°




00-01003
reflector 63°



00-01100
Satinice diffuser



00-01101
Linear optic



176-61001, B
Honeycomb