


code: 207813 EAN: 5905378207813

Linear luminaire EXECULINE 30W
4000K 3750lm 120 cm IP20 96° black
PRIME

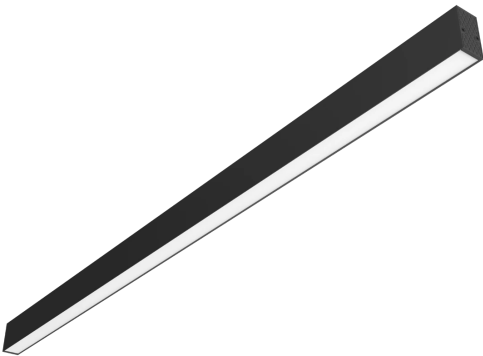

The EXECULINE linear luminaire is a modern luminaire with an elegant, minimalist design, ideal for use in offices, commercial and industrial spaces. With a wattage of 30W and a luminous flux of 3750 lm, it provides effective white (4000K) lighting with an efficiency of 125 lm/W.

The luminaire is 120 cm long, 3.5 cm wide and 6 cm high, making it slim and stylish. The product has a high colour rendering index of Ra80 and a luminous angle of 96°, ensuring even light dispersion. With an IP20 rating, it is designed for indoor use.

The housing is made of high-quality aluminium, which ensures durability and lightweight construction, while the diffusing material diffuser ensures even and gentle illumination. It provides a long life of 50,000 hours (L70B50) and a PF power factor of 0.9.

It is the ideal solution for those who value aesthetics, functionality and durability in the lighting of interior spaces.



Manufacturer issues a 5-year warranty for this product.



Voltage range and voltage type



Lifespan




Beam angle




Ambient temperature suitable for operation

Parameter	Value
Luminous efficacy	125 lm/W
Power	30 W
Colour of the light	White
Energy efficiency class 2019/2015	D
Luminous flux	3750 lm
Correlated colour temperature	4000 K
Colour consistency in McAdam ellipses	≤3
IP protection rating	20
Warranty (years)	5
Survival factor	0.9
Lifetime L70B50	50 000
Mounting type	mixed
Supply voltage range and voltage type	220-240 VAC
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
The lumen maintenance factor	96 %
Beam angle	96 °
Material (cover)	polycarbonate
Material (housing)	aluminum
Power Factor	0,9

Parameter	Value
Ambient temperature suitable for operation	-15÷45 °C
For indoor use	Inside
IEC protection class	I
Lamp's warm-up time to 60%	1
Length	1200 mm
Width	35 mm
Height	60 mm
EPREL ID	2 052 994
Form of the product (EPREL)	96
Angle for useful luminous flux (EPREL)	Sphere 360 degrees
Is the product equipped with an integrated light source? (EPREL)	Yes
Non-directional or directional light source (EPREL)	NDLS
Mains or non- mains light source (EPREL)	NMLS
Connected light source (EPREL)	No
Colour-tuneable light source (EPREL)	No
Total luminous flux (EPREL)	2 300
On-mode power Pon (EPREL)	14
Useful luminous flux Φuse (EPREL)	2 300
Beam angle in degrees (EPREL)	120




Single packaging



Width	40 mm
Height	80 mm
Length	1250 mm
Weight	1,4 kg
	1

Bulk packaging



Outer box quantity	10 pcs.
	10
Width	180 mm
	220
Length	1260 mm
Weight	15 kg
Volume	0,05 m3
	0,144

Europallet

