


LED panel

MODUS FIT4000, LED panel, rectangle C, modul 600, microprizma, LED 830, driver 900mA

Code: FIT4000C3KN600/ND

EAN: 8596099072162

This product contains a light source with energy efficiency class D

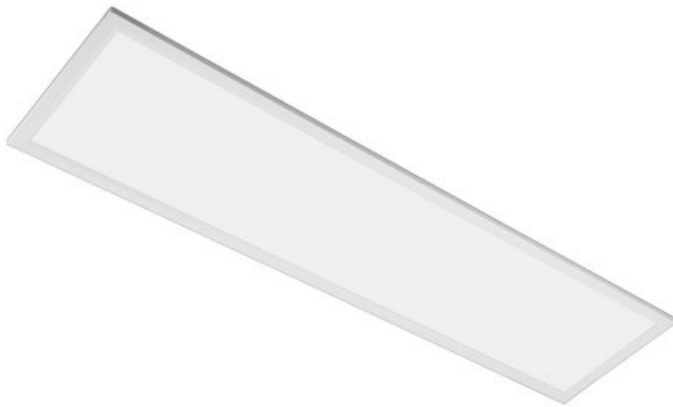

Luminaire properties

Product category:	Ceiling / wall luminaires	Effective luminous flux (lm):	4200
System power (W):	35	Luminaire efficacy (lm/W):	120
Rated lifetime L80/B50 (h):	80000	Degree of protection (IP):	IP40
Color housing:	White	Material housing:	Aluminium
Light source included:	Yes		
Suitable for built-in mounting:	Yes		
Made in Czech republic:	Yes	Degree of protection II (IP):	IP20

Light source

Light source type:	LED	Color temperature (K):	3000
Color rendering index CRI:	80-89	Replaceability:	Removeable light source, replaceable ballast
Light source type:	1991820183003	Energy efficiency class:	D

Optical system

Optical system:	KN	Light outlet:	Direct
Anti-glare limiting UGR:	19	Light sharing:	Symmetric
Material cover:	Plastic, structured	Fit for monitor workplace:	Yes
Radiation angle:	Extreme wide beam >80°		

Dimensions

Length (mm):	1196	Width (mm):	296
Height/depth (mm):	15	Built-in height/depth (mm):	15
Raster (mm):	600	Size version:	M
Weight (kg):	3,5		

Electrical values

Protection class:	II	Voltage type:	AC
Type of control gear:	LED operating device current-controlled	Nominal voltage (V):	220...240
Control gear included:	Yes	No dim function:	Yes