


**MODUS UQ, LED panel, recessed, 4000K, square A, modul 600, driver 700mA**

Code: **UQ4A600/700ND**

EAN: **8595073721980**

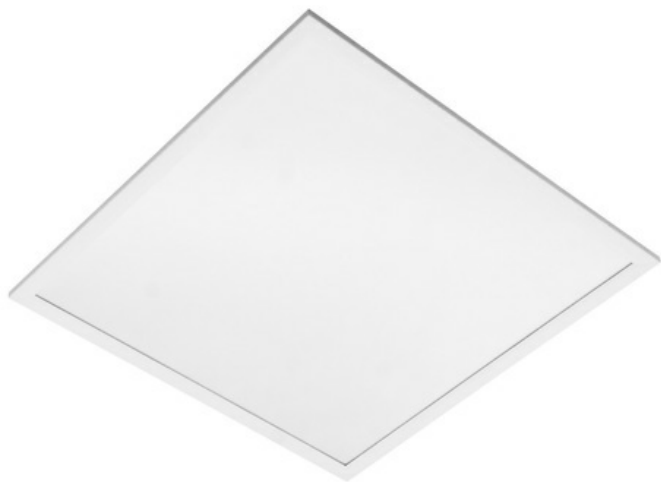

## Luminaire properties

<b>Product category:</b>	Luminaire for recessed- and surface mounting Luminaire for recessed- and surface mounting	<b>Material housing:</b>	Aluminium
<b>Color housing:</b>	White	<b>Type of luminaire:</b>	Panel luminaire
<b>Degree of protection (IP):</b>	IP20		

## Light source

<b>Lamp type:</b>	LED	<b>Rated life time L80/B50 (h):</b>	80000
<b>Suitable for number of lamps:</b>	1	<b>Lamp power (W):</b>	33
<b>Effective luminous flux (lm):</b>	4000	<b>Color temperature (K):</b>	4000
<b>Color rendering index CRI:</b>	80-89	<b>With lamp:</b>	Yes

## Electrical properties

<b>Dimmable:</b>	No	<b>Type of dimming:</b>	Not dimmable
<b>Type of control gear:</b>	Electronic transformer	<b>Protection class:</b>	II
<b>Nominal voltage (V):</b>	220...240	<b>Control gear included:</b>	Yes

## Optical system

<b>Optical system:</b>	UQ	<b>Light sharing:</b>	Symmetric
<b>Light outlet:</b>	Direct	<b>Material cover:</b>	Plastic, structured

## Dimensions

<b>Raster (mm):</b>	600	<b>Length (mm):</b>	596
<b>Width (mm):</b>	596	<b>Height/depth (mm):</b>	15
<b>Built-in length (mm):</b>	596	<b>Built-in width (mm):</b>	596
<b>Built-in depth (mm):</b>	15	<b>Size version:</b>	S
<b>Weight (kg):</b>	4,8		