

Type: **NZM1-XTVD-0**
 Article No.: **279392**
 Sales text **Door handle lock. w/o extension shaft**



Complete including rotary drive and coupling parts

An additional extension shaft is necessary with the NZM...-XT(V)D(V)(R)(-60) types.

Degree of protection IP66/UL/CSA Type 4X

Ordering information

Description			Standard, black/grey
Description			Lockable on the 0 position on the handle using up to 3 padlocks. With door interlock.
For use with			NZM1(-4), PN1(-4), N(S)1(-4)
Application			Extremely narrow fittings

Note concerning the product


Door interlock

- Not defeated in the locked OFF and ON positions
- Can be modified such that it can be defeated from the outside using a screwdriver, when it is in the unlocked ON position.
- Door can be opened in OFF

NZM...-XTVD(V)-0

- For extremely narrow fittings
- With special short extension shaft
- Cannot be combined with NZM...-XDZ additional handle
- External warning plate/designation label can be clipped on

Product view




Notes concerning the product group

Circuit-breaker can also be installed in a lying position 90 ° left/right, with the handle still in the same position.


NZM1-XT(V)D(V)(R)0(-NA)
Special tip

Up to 3 padlocks

Dimensions

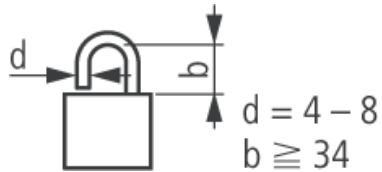

Dimensions

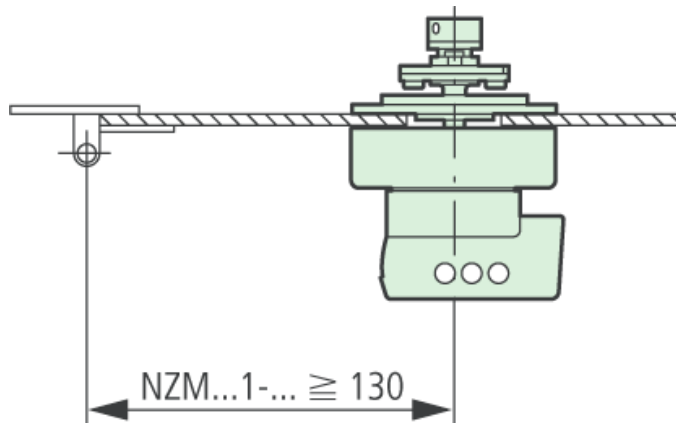

Minimum door coupling rotary handle clearance from door pivot point

Moeller GmbH, Hein-Moeller-Str. 7-11, D-53115 Bonn
E-Mail: catalog@moeller.net, Internet: www.moeller.net, <http://catalog.moeller.net>
HPL-C2007G V2.1 © 2007 by Moeller GmbH