


**U-Clamp**

with pressure trough

**BW 50**

EAN Code: 4013339057108  
Smallest packaging unit: 50 pcs.

the photorealistic images are to be considered as reference images

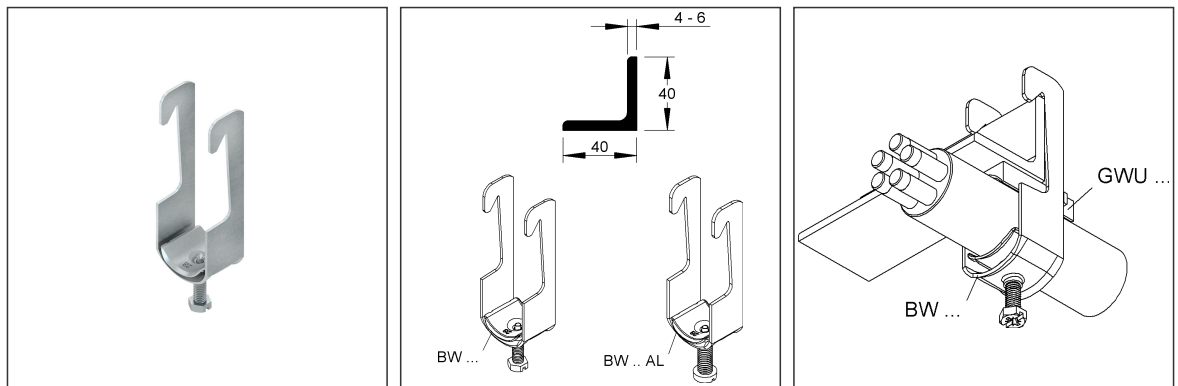

**Article Description**

U-clamp, for angle irons 40x40x4-6 mm, for 1 cable, Ø 46-50 mm, steel, hot dip galvanised DIN EN ISO 1461, with steel pressure trough

**Additional Price Information**

Article group	N08
quantity unit	pcs.

**Weight**

Weight per quantity unit	120 g/ pcs.
Weight in kg per 100	12 kg/ 100pcs.

# Technical Datasheet

## U-clamps

BW 50

the photorealistic images are to be considered as reference images

### Physical Article Dimensions

Height	55.00 mm
Width	145.00 mm
Depth/length	42.00 mm

### Packing Dimension

<b>50 pieces = 1 carton</b>		✓ VP1-smallest packaging unit ( PU)		✓ VP1-preferred PU	
Lenght	480 mm	Width	280 mm	Height	140.00 mm
Volume	0,019 m <sup>3</sup>	Gross weight	6,86 kg		
Min. quantity	50.00 pcs.	Max. Quantity	50.00 pcs.		

<b>1800 pieces = 1 pallet</b>					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	262 kg	Volume	0,960 m <sup>3</sup>		
Min. Quantity	1.800.00 pcs.	Max. Quantity	1.800.00 pcs.		

### Tender Text

U-clamp, for angle iron, with pressure trough and M 8 pivot bolt with multiple drive, can be used on isosceles and isosceles angle steel and U-iron.  
Universal-Counter Trough GWU ... please order separately.  
Used for: equal and unequal-legged angle steel and U-iron with a maximum leg length of 40 mm and a thickness of 4 - 6 mm  
Dimensions (approx. dimensions)  
Assignment : 1 cable  
for cable-Ø : 46 - 50 mm  
Material bracket : steel, hot-dip galvanised in accordance with DIN EN ISO 1461  
Material pressure tray : steel, strip galvanised to DIN EN 10346  
NIEDAX model no. : BW 50  
EP material \_\_\_\_\_ EP wage \_\_\_\_\_  
Unit price/piece

### Safety & Environment

REACH Date	05.11.2025
REACH Info	Conformable
RoHS Info	Conformable

### Origin & International Trade

Country of origin	DE
Customs tariff number	73269098