OSRAM

LDV DOWNLIGHT S 830 L80 AL

LEDVANCE DOWNLIGHT S | LED under cabinet lights

- Energy-saving recessed furniture luminaire
- Can be used as replacement for 20 W low-voltage halogen applications
- Fits into 16 mm shelving and kitchen cupboards with standard 8 mm cable ducts
- Wide spectrum of applications

Product benefits

- Particularly small dimensions
- Shallow mounting depth
- Simple installation using the classic side holes in the shelves
- Variable installation possibilities
- Emits less heat than classic halogen luminaires

Product features

- Mounting diameter: 68 mm
- Ring colors in white matt or anodized aluminum
- Color temperature: 3,000 K (Warm White) or 4,000 K (Neutral White)
- Direct connection to a 220...240 V AC supply

Technical data

Electrical data

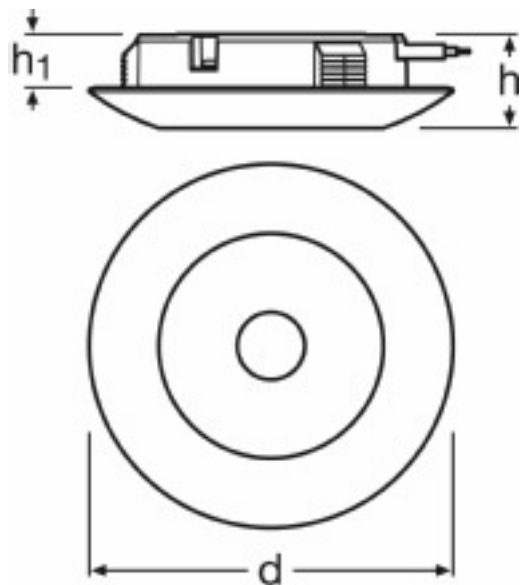|	
Operating mode	Electronic control gear (ECG)
Nominal wattage	7.00 W
Mains frequency	50...60 Hz

Light technical data

Color temperature	3000 K
Beam angle	80 °

Dimensions & weight

Length	88.0 mm
Width	88.0 mm
Diameter	88.0 mm
Height	23.0 mm

Product line drawing

Colors & materials

Body material	Aluminum
Product color	Anodized

Additional product data

Equipment	LED OSLON
Equipped with lamp	Yes
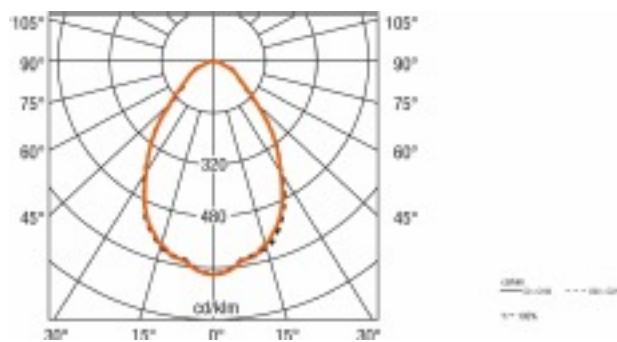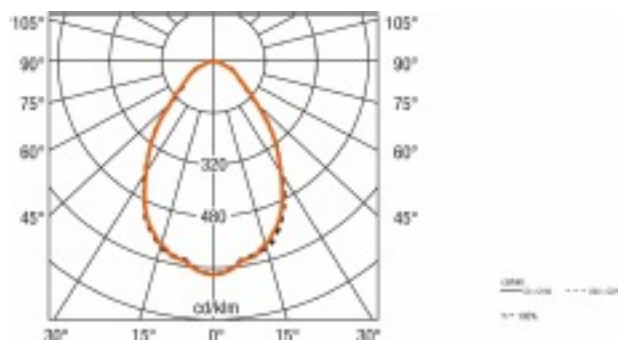
Luminous intensity distribution

Luminous intensity distribution

Capabilities

Type of installation	Recessed mounting
Adjustable	No
Type of connection	Connector

Certificates & standards

Protection class	insulation class II (safety insulation)
Type of protection	IP20

Equipment / Accessories

• Equipped with OSLON LED from OSRAM

—

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4008321968623	Folding carton box 1	107 mm x 57 mm x 112 mm	244.00 g	0.68 dm³
4008321968319	Shipping carton box 4	145 mm x 150 mm x 245 mm	1129.00 g	5.33 dm³
4008321968494	Shipping carton box 16	280 mm x 328 mm x 286 mm	5001.00 g	26.27 dm³

—

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

—