

QT-ECO 1X4...16 S

QUICKTRONIC ECONOMIC | ECG for FL 7 mm and CFL



Product family features

- Supply voltage: 220...240 V
- Line voltage: 198...264 V
- Line frequency: 50 Hz
- Energy Efficiency Index EEI: A2 / A3 (depending on lamp)
- Automatic shutdown of defective lamps and at end of life (EoL)

Product family benefits

- Compact housing
- Automatic restart after lamp replacement
- Large input voltage range

Areas of application

- Public buildings

Product datasheet

Technical data

Electrical data

Nominal voltage	220...240 V
Mains frequency	50 Hz
Input voltage DC	176...254 V
Maximum output power	16 W
Efficiency in full-load	84 % ¹⁾
Operating frequency	40 kHz ²⁾
Max. ECG no. on circuit breaker 10 A (B)	68
Max. ECG no. on circuit breaker 16 A (B)	112
Inrush current	10 A

¹⁾ at 230 V, 50 Hz


²⁾ Approximately

Light technical data

Starting time	1.0 s ¹⁾
---------------	---------------------

¹⁾ Preheat start: After a switch off, the lamps should remain switched off for 2 minutes to ensure an optimum preheat start

Dimensions & weight



Length	80.0 mm
Width	40.0 mm
Height	22.0 mm
Mounting hole spacing, length	72.0...75.0 mm
Product weight	50.00 g

Temperatures & operating conditions

Ambient temperature range	-15...+50 °C
Permitted rel. humidity during operation	5...85 % ¹⁾

¹⁾ Maximum 56 days/year at 85 %

Product datasheet

Lifespan

ECG lifetime	30000 h ¹⁾
--------------	-----------------------

¹⁾ T_c = 70°C, with max. 10% failure rate

Additional product data

Suitable for lamp power (1 lamp)	4...16 W
----------------------------------	----------

Capabilities

Suitable for fixtures with prot. class	I / II
End of lamp life safety shutdown	EOL T.2
Max. cable length to lamp/LED module	1.0 m / 0.5 m
Dimmable	No
Intended for no-load operation	No

Certificates & standards

Approval marks – approval	VDE
EEI – Energy Label	A2/A3 ¹⁾
Standards	Acc. to EN 61347-2-3/Acc. to EN 55015:2006 + A1:2007/Acc. to EN 61000-3-2/Acc. to EN 61547
Protection class	I
Type of protection	IP20

¹⁾ For detailed information please see Lamp-ECG combinations

Logistical data

Commodity code	850410809000
----------------	--------------

Environmental information


Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	23-12-2021
Primary Article Identifier	4050300638584
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	245530b2-aba2-4b55-8b5c-d1b2c36960a0

Wiring Diagram

QUICKTRONIC® ECO

	QT-ECO 1x16 S/L	QT-ECO 1x18 S/L	QT-ECO 1x24 S/L	QT-ECO 1x26 S/L	QT-ECO 1x32 S/L
Max. I _{LED}	60 mA	30 mA	30 mA	30 mA	30 mA
Max. I _{LED} (Puls)	120 mA	60 mA	60 mA	60 mA	60 mA
Max. I _{LED} (Puls)	120 mA	60 mA	60 mA	60 mA	60 mA
Max. I _{LED} (Puls)	120 mA	60 mA	60 mA	60 mA	60 mA
T _{th}	75 µs	100 µs	100 µs	100 µs	100 µs

QT-ECO 1x16 S/L, QT-ECO 1x18 S/L, QT-ECO 1x24 S/L, QT-ECO 1x26 S/L, QT-ECO 1x32 S/L
 Max. permissible cable length between ECU and lamp: $1.5 \text{ m (P/N 1, 2, 3, 4)}$ $+ 0.5 \text{ m (P/N 5, 6)}$
 Max. permissible cable length between ECU and lamp: $1.5 \text{ m (P/N 1, 2, 3, 4)}$ $+ 0.5 \text{ m (P/N 5, 6)}$
 Max. Leiterabstände zwischen ECU und Lampe, Leiterabstände max.
 Microcontroller programmieren gemäß optioneller Angabe S/L in Datenblatt
 Angaben zum Leiterabstand sind nicht verbindlich, sondern nur Richtwerte

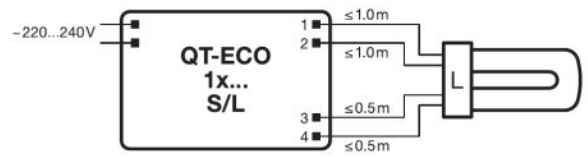

OSRAM

592501_EAC QT-ECO

723145_Wiring Diagram QT-ECO 1x

Download Data

File	
	User instruction QUICKTRONIC QT ECO
	Certificates 334955_VDE-Marks approval
	Certificates 334983_VDE-Marks approval
	Certificates 335154_Manufacturer's declaration – EN 55015:2006+A1:2007 (300 MHz)
	Certificates 683440_VDE-Marks approvals
	Declarations of conformity QUICKTRONIC CE 3364256 190821
	CAD data 3-dim 313443_80x40x22 9900019
	CAD data 3-dim 313452_80x40x22 9900019
	CAD data 3-dim 313497_80x40x22 9900019

Product datasheet



CAD data PDF
313386_80x40x22 9900019

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300638584	QT-ECO 1X4...16 S	Shipping carton box 50	212 mm x 142 mm x 170 mm	5.12 dm ³	2791.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

QT-ECO 1X4...16 S

QUICKTRONIC ECONOMIC | ECG for FL 7 mm and CFL

Product name	Lamp group	Nominal current	Nominal wattage + Power loss	Power factor λ [PIM]	Luminous flux at 25 °C	Number of lighting outlets	EEI – Energy Label
QT-ECO 1X4...16 S	DULUX D/E 10 W	0.08 A	11.50 W	0.60 c	600 lm	1	A3
	DULUX D/E 13 W	0.10 A	14.00 W	0.60 c	850 lm	1	A2
	DULUX S/E 11 W	0.09 A	13.00 W	0.60 c	900 lm	1	A3
	DULUX S/E 7 W	0.06 A	9.00 W	0.60 c	400 lm	1	A3
	DULUX S/E 9 W	0.07 A	10.00 W	0.60 c	600 lm	1	A3
	DULUX T/E 13 W	0.10 A	14.00 W	0.60 c	800 lm	1	A2
	HE 14 W	0.10 A	15.00 W	0.60 c		1	A2
	HNS S/E 11W 2G7						
	HNS S/E 6.5W 2G7						
	HNS S/E 8W 2G7						
	L 13 W BASIC	0.08 A	15.00 W	0.60 c		1	
	L 16 W	0.11 A	16.00 W	0.60 c		1	
	L 6 W BASIC	0.06 A	8.50 W	0.60 c		1	
	L 8 W BASIC	0.07 A	10.50 W	0.60 c		1	
	NS 4W G5						
	NS 6W G5						
	NS 7W G5						

Product datasheet

Product name	Lamp group	Luminous flux at 35 °C
QT-ECO 1X4...16 S	DULUX D/E 10 W	
	DULUX D/E 13 W	
	DULUX S/E 11 W	
	DULUX S/E 7 W	
	DULUX S/E 9 W	
	DULUX T/E 13 W	
	HE 14 W	1150 lm
	HNS S/E 11W 2G7	
	HNS S/E 6.5W 2G7	
	HNS S/E 8W 2G7	
	L 13 W BASIC	950 lm
	L 16 W	1100 lm
	L 6 W BASIC	270 lm
	L 8 W BASIC	450 lm
	NS 4W G5	
	NS 6W G5	
	NS 7W G5	