


# PRODUCT DATASHEET

## LS AY PFM -10/SE/P SIL-SEAL

LED STRIP VALUE-300 PROTECTED | IP65 protected LED strips with 300 lm/m for general applications

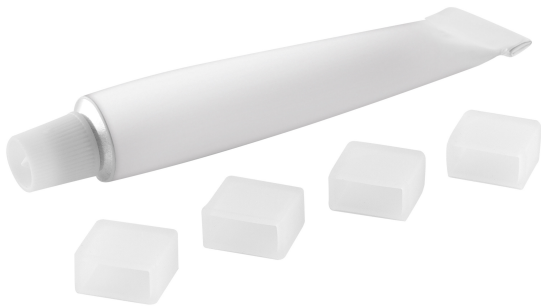

---

### Areas of application

- General indoor illumination

---

### Product benefits

- Easy installation of connector, no manual wiring required
- Tool-free installation

## TECHNICAL DATA

### Dimensions & Weight

Length	12 mm
Width	6.5 mm
Height	10,0 mm
Product weight	3.00 g

### Colors & materials

Product color	Transparent
---------------	-------------

### Temperatures & operating conditions

Ambient temperature range	-15...+45 °C
Temperature range in operation	-15...+45 °C

### Certificates & Standards

Type of protection	IP00
--------------------	------

## LOGISTICAL DATA

Temperature range at storage	-35...+85 °C
------------------------------	--------------

## DOWNLOAD DATA

### DOWNLOAD DATA



Catalogs  
LEDVANCE LED Strip System - Wave 2 - Fall 2020 (EN)

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075275744	BAG 4	80 mm x 120 mm x 5 mm	13.00 g	0.05 dm <sup>3</sup>
4058075275751	Shipping box 200	180 mm x 100 mm x 180 mm	729.00 g	3.24 dm <sup>3</sup>
4058075275768	Shipping box 2,000	520 mm x 380 mm x 210 mm	8057.00 g	41.50 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.