


article#	0521-sr
article description	Taurus2 rubber plug 2SL IP54 (black/red)
description long	Safety plug series Taurus2 - rubber color (housing/ring): black/red material (housing/contact carrier): TPE/PA6 earthing system: dual earthing system 16A/ 250V AC / 3p (2P+E), protection rating: IP54
GTIN (EAN)	9003399465208
country of origin	AT
customs number	85366990
net weight	0.068 kg
packaging quantity	30
minimum order quantity	30

ETIM 10.0	EC000242
Model	Hybrid plug CEE 7/7 (type E/F)
Protective contact	Earthing clips and round
Material	Rubber
Material quality	Thermoplastic
Degree of protection (IP)	IP54
Insert direction	Straight
Connection system	Screwed terminal
Colour	Black
Number of poles	3
Nominal voltage	250 V
Nominal current	16 A
For heavy conditions according to VDE	True

K (cable Ø)	6-13 mm
wire flexible	0,75-2,5 mm²
contact screws	80 Ncm
housing screws	110 Ncm
strain relief	110 Ncm
dismantling length	30 mm
stripping length	7 mm
ambient temperature	-25 – 40 °C
IK-code *)	IK09



*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

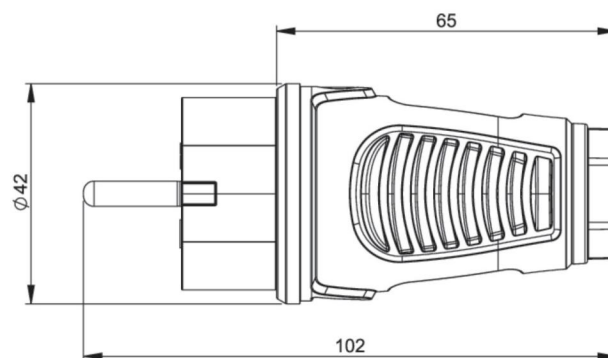

<https://www.pcelectric.at/shop/en/?func=detail&artnr=0521-sr>