


article#	8430v
article description	Flanged socket / DIN 49440
description long	Panel mounted safety socket Design / DIN 49440 IP44 (white) housing material: PC/ABS rated current: 16A number of poles: 3 (2P+PE) rated voltage/frequency: 250V~ / 50+60Hz contacts: brass nickel plated connection technology: screwless terminals color: white (similar to RAL 9016) for installation in cable trunking hinged lid with inscription field (optional: key lock) IP protection class: IP44
GTIN (EAN)	9003399672392
country of origin	AT
customs number	85366990
net weight	0.186 kg
packaging quantity	6
minimum order quantity	6

ETIM 9.0	EC001321
Model	Other
IEC-amperage	16 A
Number of poles	3
Voltage according to EN 60309-2	230 V (50+60 Hz) blue
Degree of protection (IP)	IP44
Connection system	Screw less terminal
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Nickel-plated

a	90 mm
b	90 mm
c	60 mm
d	60 mm
e	16 mm
f	48 mm
g	66 mm
gs	68 mm
h	63 mm
i	67 mm
wire flexible	1,5-2x2,5 mm ²
wire solid	1,5-2x2,5 mm ²
dismantling length	50 mm
stripping length	8-14 mm

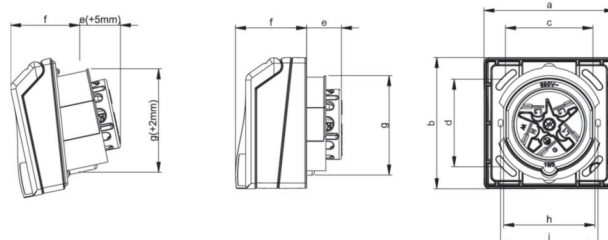

<https://www.pcelectric.at/shop/en/?func=detail&artnr=8430v>