


article#	87820075-ss
article description	EV charging cable (AC) Mode 3 Typ2-Typ2 20A 3ph 11kW L=7,5m black
description long	PCE-Ladeleitung AC (Mode 3, Fall B) für Elektrofahrzeuge (EV) Anschlussseite 1: Fahrzeugkupplung Typ 2 mit Schutzkappe (schwarz) Anschlussseite 2: Ladestecker Typ 2 mit Schutzkappe (schwarz) Kabellänge / Typ / Kabelfarbe: 7,5m / glatt / schwarz Nennstrom / Nennspannung / Ladeleistung (max.): 20A / 480V~ / 11kW Schutzart: IP54 (Schutzkappe aufgesteckt) geprüft nach IEC 62196-1 und IEC 62196-2, Prüfzeichen: VDE
GTIN (EAN)	9003399676604
country of origin	PL
customs number	85444290
net weight	2.550 kg
packaging quantity	1
minimum order quantity	1

ETIM 9.0	EC002897
Type of current	AC 3-phase
Number of communication conductors	2
Type vehicle side	Type 2
Type infrastructure side	Type 2
With Incable Control Box (ICCB)	False
Charging mode	Mode 3
Nominal current	20 A
Nominal voltage	480 V
With temperature sensor	False
Cable length	7.5 m
Cable type	Straight
Contact material	CuZn
Surface treatment contacts	Silver-plated

ambient temperature	-30 – 50 °C
IK-code *)	IK10



*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

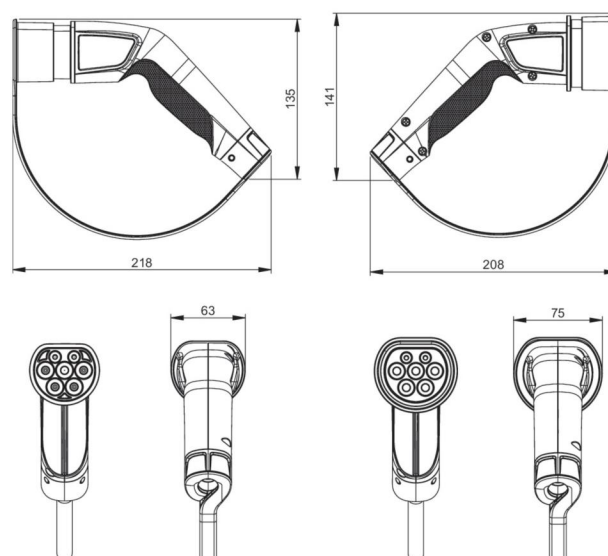

<https://www.pcelectric.at/shop/en/?func=detail&artnr=87820075-ss>