


DELTA PUSHB. INSERT FM, SHUTTER PUSHB. 10A 250V
ELECTRICALLY INTERLOCKED

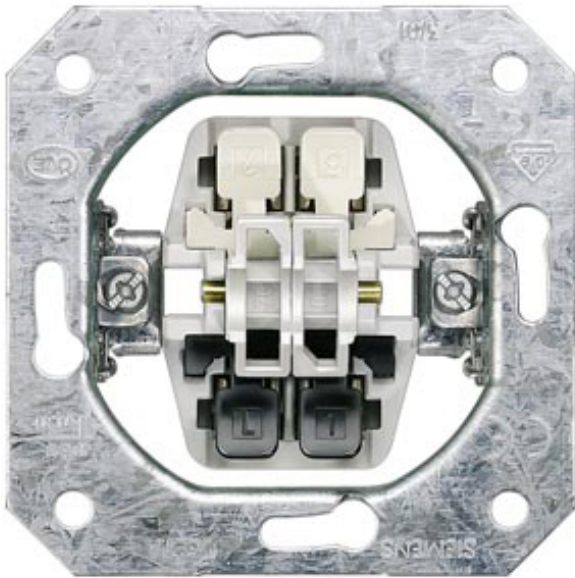

Model	
Design of the surface	others
Type of composition	basic element
Design of the operating mechanism	rocker
General technical data	
Number of poles	2
Type of switch	pushbutton 2-pole
Mounting type	fixing with claw and screw
Material	others
Protection class	
Protection class IP	IP20
Switching capacity	
Switching capacity current	10 A
Main circuit	
Operating voltage / Rated value	250 V
Operating current / rated value	10 A
Appearance	

Appearance	not applicable
Color	miscellaneous

Product details

Product feature / interlock	No
Product component / Labeling field	No
Product feature	
• halogen-free	Yes
• transparent	No

Product function

Product function	
• electronic operation	No
• Mechanical operation	Yes

Display and operation

Number of keys	2
-----------------------	---

Mechanical Design

Mounting type	flush mounted
Material / of the enclosure	others

General Product Approval	Declaration of Conformity	Test Certificates
---------------------------------	----------------------------------	--------------------------



ÖVE



VDE



EG-Konf.

[Type Test Certificates/Test Report](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5TA2114>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5TA2114>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TA2114

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

