

MD IR N360

COM1 - Surface wiring anthracite
EAN 4007841 079888
Article number 079888



Bluetooth



Settings via App



Eagle Eye Technology



2 - 2000 lux (via App)



IP54



CE

Function description

Perfect sensor solution for entrances and façades. The powerful, LED-compatible (600 W) MD IR N360 with 360° detection range for ceiling mounting and extended Eagle Eye detection for frontal movement and convenient control and networking via Bluetooth Mesh. Including smart Connect functions for networking luminaires, timer programmes and wireless push-buttons.

Technical specifications

Dimensions (L x W x H)	93 x 80 x 80 mm
Dimensions (Ø x H)	80 x 93 mm
With motion detector	Yes
Manufacturer's Warranty	5 years
Settings via	Bluetooth, App
With remote control	No
Version	COM1 - Surface wiring anthracite
PU1, EAN	4007841079888
Type	Motion detectors
Application, place	Outdoors
Colour	Anthracite
Includes corner wall mount	No
Installation	Surface wiring
IP-rating	IP54
Ambient temperature	from -20 up to 40 °C
Material	Plastic
Fluorescent lamps, electronic ballast	600 W

Mounting height	1,8 – 4 m
Mounting height max.	4,00 m
Optimum mounting height	2,5 m
Detection angle	360 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	Yes
Mechanical scalability	No
Reach, radial	Ø 7 m (38 m²)
Reach, tangential	Ø 26 m (531 m²)
Cover material	Cover clips
Twilight setting	2 – 2000 lx
Time setting	5 s – 60 Min.
Twilight setting TEACH	Yes
Constant-lighting control	No
Interconnection	Yes

MD IR N360

COM1 - Surface wiring anthracite
EAN 4007841 079888
Article number 079888



Technical specifications

Fluorescent lamps, series-corrected 1000 VA

Capacitive load in μF 176 μF

Technology, sensors passive infrared, Light sensor

Interconnection via

Bluetooth Mesh


Reichweite Radial Eagle Eye max.

6 m

Product category

Motion detector

Detection Zone

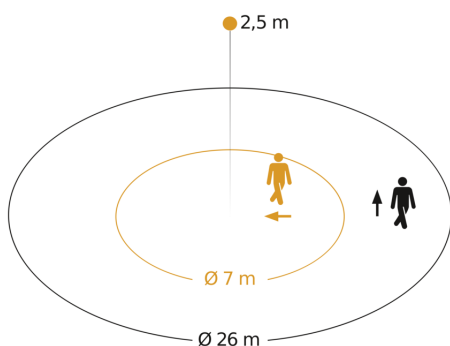

Possible mounting height: 1,80 m - 4,00 m

Orange: radial

Black: tangential

Dimension Drawing

