

Hallway

BT IPD - concealed
EAN 4007841 086282
Article number 086282



max. 25 x 3 m



2 - 12 m



IP54



2 - 2000 lux

5 years

manufacturer's warranty steinel.de/
garantie



CE

Function description

The cleverer hallway sensor knows more. Perfect radial detection up to 25 m – ideal for long corridors and hallways. Reach can be adjusted in both directions. Contemporary Control PRO II design. Featuring Bluetooth technology. Interfaces for COM1, COM2, DALI-2 APC, DALI-2 IPD, KNX, IP and BT IPD (Slave).

Technical specifications

Dimensions (L x W x H)	67 x 103 x 103 mm
With motion detector	Yes
Manufacturer's Warranty	5 years
Settings via	Bluetooth Mesh
With remote control	No
Version	BT IPD - concealed
PU1, EAN	4007841086282
Type	Presence detector
Application, place	Indoors
Application, room	Indoors, corridor / aisle
Colour	white
Colour, RAL	9003
Includes corner wall mount	No
Installation site	ceiling
Installation	Concealed wiring, Ceiling
IP-rating	IP20
Ambient temperature	from -20 up to 50 °C

Mounting height max.	4,00 m
Optimum mounting height	2,8 m
HF-system	5,8 GHz
Detection	also through glass, wood and stud walls
Detection angle	Aisle, 360 °
Angle of aperture	160 °
Sneak-by guard	Yes
Capability of masking out individual segments	No
Electronic scalability	Yes
Mechanical scalability	No
Reach, radial	25 x 3 m (75 m ²)
Reach, tangential	25 x 3 m (75 m ²)
Transmitter power	< 1 mW
Twilight setting	2 – 2000 lx
Basic light level function	No
Main light adjustable	Yes

Hallway

BT IPD - concealed
EAN 4007841 086282
Article number 086282




Technical specifications

Material	Plastic
Mains power supply	50 – 60 Hz
Technology, sensors	High frequency, Light sensor
Mounting height	2 – 4 m


Twilight setting TEACH	No
Constant-lighting control	No
Interconnection	Yes
Interconnection via	Bluetooth Mesh
Product category	Presence detector

Detection Zone



Possible mounting height: 2,00 m – 4,00 m
Orange: radial and tangential

Dimension Drawing

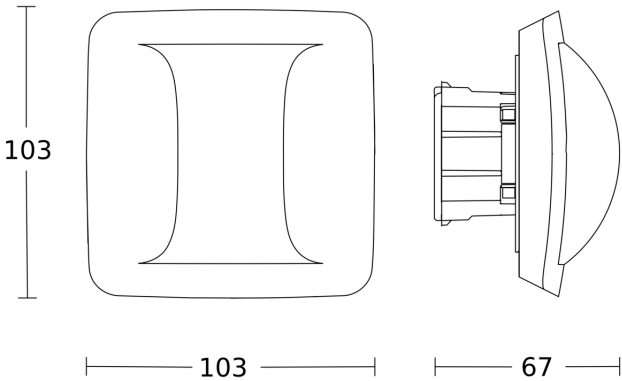

Circuit diagram

