

Start Bulkhead LED IP65 Oval

START BULKHEAD LED IP65 OVAL 3K 1825LM
0049186



Product features

- "LED exterior bulkhead, oval, comes with 2m cable, white polycarbonate body, 1830LM, 23W, 80lm/W, 3000K, Driver Current 135mA, CRI80, , non-dimmable, IP65, IK08, 25000hrs (L70), (LxWxD) 333x223x78mm"



NOTES

undefined

PRODUCT OVERVIEW

IPC Code	0049186
Product name	START BULKHEAD LED IP65 OVAL 3K 1825LM
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Logistics & Industry, Residential & Consumer
ETIM Class	EC002892
E-number SE	7505127
Fixture luminous flux (lm)	1830
Luminous flux (lm)	1830
Luminaire efficacy (lm/W)	79.6
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1
Total power consumption (W)	23
Electrical protection	Class II
Dimmable	No
Housing colour	White
IP rating	IP65
IK rating	IK08
Product EAN number	5410288491868

DATA TABLE

Start Bulkhead LED IP65 Oval

START BULKHEAD LED IP65 OVAL 3K 1825LM
0049186

General data

IPC Code	0049186
Product name	START BULKHEAD LED IP65 OVAL 3K 1825LM
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Logistics & Industry, Residential & Consumer
Operating temperature range (°C)	-10°C - 40°C
ETIM Class	EC002892
E-number SE	7505127

Optical data

Fixture luminous flux (lm)	1830
Luminous flux (lm)	1830
Luminaire efficacy (lm/W)	79.6
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	23
Current (A)	0.116
Mains voltage (V)	220-240V~
Electrical protection	Class II
Dimmable	No
Drive current (mA)	180
Inrush Duration (µs)	800
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	14
Max. Luminaires per 16A C Breaker	23

Lifetime data

Lumen maintenance - L70 B50	25000
Lumen maintenance - L70 B20	23000
Lumen maintenance - L70 B10	21000
Lumen maintenance - L80 B50	19000
Lumen maintenance - L80 B20	17500
Lumen maintenance - L80 B10	16000

Physical data

Housing colour	White
IP rating	IP65
IK rating	IK08
Diffuser finish	Opal

Start Bulkhead LED IP65 Oval


START BULKHEAD LED IP65 OVAL 3K 1825LM
0049186

Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	78
Nominal Product Width (mm)	223
Nominal Product Height (mm)	333
Weight (kg)	0.98


Packaging

Single packaging type	Carton
Product EAN number	5410288491868
Packaging single length / height (cm)	34.5
Packaging single width (cm)	11.0
Packaging single depth (cm)	23.5
DUN14 (outer)	15410288491865
Units per outer package	6
Packaging outer length / height (cm)	71.0
Packaging outer width (cm)	35.0
Packaging outer depth (cm)	25.5

PHOTOMETRY

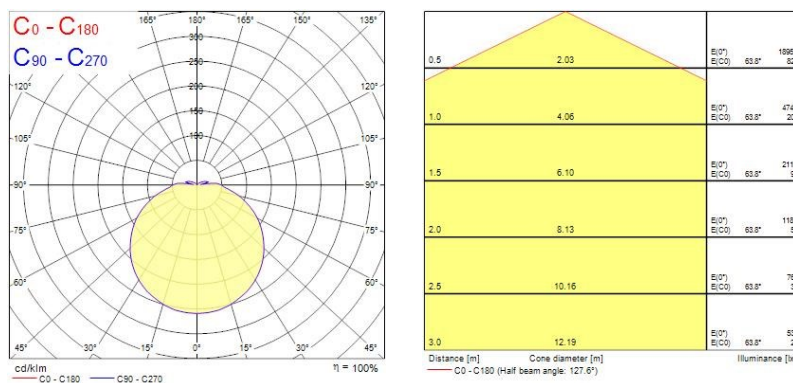



TECHNICAL DRAWINGS




Start Bulkhead LED IP65 Oval START BULKHEAD LED IP65 OVAL 3K 1825LM 0049186


SYLVANIA 0049186

 This luminaire contains built-in LED lamps


 } LED


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built-in LED lamps

The lamps cannot be changed in the luminaire.

 } LED

SYLVANIA 0049186 

874/2012