



# 2325 C07 OA LED 18/10/ML-840 ET

TOC: 7143140

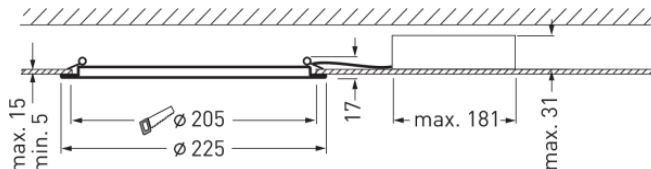

**TX059926** ■ C0 - C180  
 UGR I = 27.9  
 UGR q = 27.9  
 DIN 5040: A40  
 UTE: 1,00 E



## Offer text

LED downlight for ceilings with cavity dimensions  $\geq 35$  mm Tool-free ceiling installation via rapid-mounting springs. Cut-out opening  $\varnothing 205$  mm, Recess depth = 35 mm. With opal PMMA cover. With symmetric wide light intensity distribution. Luminaire with settable luminaire luminous flux 1000 lm / 1800 lm. Connected load depending on the set luminous flux level 11 W / 22 W. luminous efficiency of luminaire 91 lm/W. Light colour neutral white, correlated colour temperature (CCT) 4000 K, general colour rendering index (CRI)  $R_a > 80$ . Mean rated service life  $L70(t_q 20^\circ\text{C}) = 35,000$  h. Luminaire body of die-cast aluminium, Colour white. Luminaire diameter  $\varnothing 225$  mm, luminaire height 17 mm. Permissible ambient temperature (ta):  $-20^\circ\text{C} - +25^\circ\text{C}$ . Safety class (EN 61140): I, Protection rating on room side IP44, impact resistance level in accordance with IEC 62262: IK02/0,2 J, testing temperature of wire glow test in accordance with IEC 60695-2-11: 650 °C. With electronic transformer, switchable. The luminaire complies with fundamental requirements of applicable EU regulations and product safety legislation and bears the CE symbol. The luminaire is also ENEC-certified by an independent testing authority. Weight 0,5 kg.

## Product features and key data


<b>Applications</b>	sales rooms foyers corridors conference rooms Hotels and restaurants  residential areas	
<b>Luminaire type</b>	LED downlight for ceilings with cavity dimensions $\geq 35$ mm	
<b>Mounting method</b>	Recessed	
<b>Luminaire optic</b>	With opal PMMA cover.	
<b>LED-System</b>	Luminous flux (level 0)	Luminous flux (level F)
<b>Connected load</b>	11 W	22 W
<b>Colour temperature</b>	4.000 K	4.000 K
<b>Rated luminous flux</b>	1.000 lm	1.800 lm
<b>Luminous efficacy</b>	91 lm/W	
<b>CEN flux code</b>	46 78 95 100 100 0 0 0 0	
<b>Service life</b>	$L70 (20^\circ\text{C}) = 35.000$ h	
<b>Colour rendering index</b>	80	
<b>Photobiological class</b>	Group 0 - no risk	
<b>Luminaire colour</b>	RAL9016 Traffic white	
<b>Luminaire body</b>	Luminaire body of die-cast aluminium,	
<b>Electrical version</b>	With electronic transformer, switchable.	
<b>Connection method</b>	Terminal	
<b>Wire diameter</b>	1,50 mm <sup>2</sup>	
<b>Monitoring Ready</b>	No	
<b>Mains frequency</b>	50/60 Hz	
<b>Mains voltage</b>	220 - 240 V	
<b>Ingress Protection (IP) rating</b>	IP20	
<b>Protection rating on room side</b>	IP44	
<b>Protection class</b>	II	
<b>Impact resistance (IK)</b>	IK02	
<b>Hot wire resistance</b>	650 °C	
<b>Ambient temperature</b>	25 °C	
<b>Net height</b>	17 mm	
<b>Outside diameter</b>	225 mm	
<b>Weight</b>	0,5 kg	
<b>Recessing diameter</b>	205 mm	

# 2325 C07 OA LED 18/10/ML-840 ET

TOC: 7143140



## light distribution curve

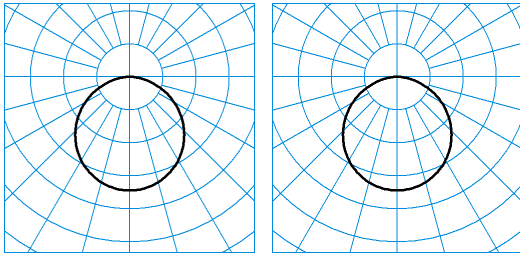

**TX059926**

■ C0 - C180

UGR I = 27.9

UGR q = 27.9

DIN 5040: A40

UTE: 1,00 E

**TX059927**

■ C0 - C180

UGR I = 25.8

UGR q = 25.8

DIN 5040: A40

UTE: 1,00 E