



2350 D2 OTA19 40/30/ML-830 ET

TOC: 7240140



TX084346
 UGR I = 18.6
 UGR q = 18.5
 DIN 5040: A50
 UTE: 1,00 C

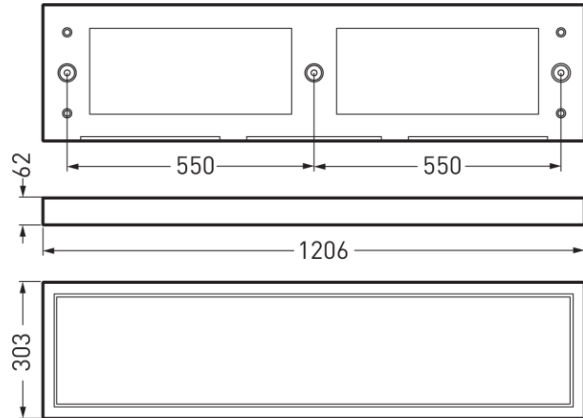

Offer text

Surface-mounted LED ceiling luminaire with translucent PMMA cover. For ceiling mounting indoors. Cover of translucent PMMA with photometrically effective prism structure. With symmetric narrow-wide light distribution. Glare evaluation (EN 12464-1) according to UGR < 19. Luminaire with settable luminaire luminous flux 2900 lm / 3800 lm. Connected load depending on the set luminous flux level 27,00 W / 36,00 W. luminous efficiency of luminaire 106 lm/W. Light colour warm white, correlated colour temperature (CCT) 3000 K, general colour rendering index (CRI) $R_a > 80$. Luminaire body of sheet steel, powder-coated white. Dimensions (L x W): 1224 mm x 303 mm, luminaire height 61 mm. Safety class (EN 61140): , protection rating (DIN EN 60529): , impact resistance level in accordance with IEC 62262: , testing temperature of wire glow test in accordance with IEC 60695-2-11: . With electronic transformer, switchable. The luminaire is also ENEC-certified by an independent testing authority. Weight 6,2 kg.

Product features and key data


Applications	offices banks foyers sales rooms ticket halls exhibition rooms educational rooms	
Luminaire type	Surface-mounted LED ceiling luminaire with translucent PMMA cover.	
Mounting method	Surface-mounting	
Luminaire optic	Cover of translucent PMMA with photometrically effective prism structure.	
LED-System	Luminous flux (level 0)	Luminous flux (level F)
Connected load	27 W	36 W
Colour temperature	3.000 K	3.000 K
Rated luminous flux	2.900 lm	3.800 lm
Luminous efficacy	107 lm/W	
CEN flux code	63 88 97 100 100 0 0 0 0	
Colour rendering index	80	
Photobiological class	Group 0 - no risk	
Luminaire colour	RAL9016 Traffic white	
Luminaire body	Luminaire body of sheet steel, powder-coated white.	
Electrical version	With electronic transformer, switchable.	
Connection method	Terminal	
Wire diameter	1,50 mm ²	
Monitoring Ready	No	
Mains frequency	50/60 Hz	
Mains voltage	220 - 240 V	
Ingress Protection (IP) rating	IP20	
Protection class	II	
Impact resistance (IK)	IK02	
Hot wire resistance	650 °C	
Ambient temperature	25 °C	
Net length	1.224 mm	
Net width	303 mm	
Net height	61 mm	
Weight	6,2 kg	

2350 D2 OTA19 40/30/ML-830 ET

TOC: 7240140



light distribution curve

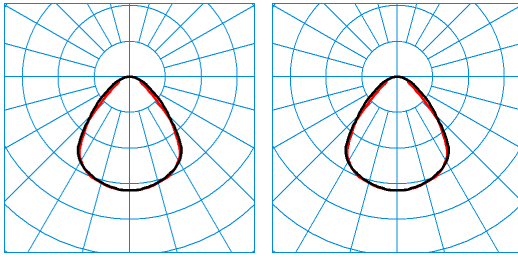

TX084346

■ C0 - C180
■ C90 - C270

UGR I = 18.6

UGR q = 18.5

DIN 5040: A50

UTE: 1,00 C

TX084347

■ C0 - C180
■ C90 - C270

UGR I = 17.6

UGR q = 17.6

DIN 5040: A50

UTE: 1,00 C