

UWF 10

UWF 10 small Under Water Floodlights for use with 12V extra low voltage lamps suitable for fresh water installation only between 0,2m to 5m depths.

They are designed for surface mounting submersible applications, but may also be installed above ground using 20W lamps (max). UWF 10 luminaires are ideal for small fountains and water displays (no LED).

SPECIFICATION:

Body and frame in black technopolymer. Impact resistant safety glass.

AISI 304 stainless steel bracket and nickel plated brass screws with PG 11 cable gland for Ø6-10mm cables.

IP68 guaranteed only by using H07RN8-F 2 x 1,5 toughened rubber cable, available as accessory A0235.



UWF 10 LED + H07RN8-F

Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EEL =	Cosp ≥ 0,9	Code	Notes
GU5,3	4,5W		3000	C	80	III				07042280	


! For 12 V AC lamp supply.

🔌 Luminaire supplied complete with 4 meters of H07RN8-F 2x1.5 mm² cable.



UWF 10 + H07RN8-F

Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EEL =	Cosp ≥ 0,9	Code	Notes
GU5,3	max 50W/12V	HRGS			80	III				01958018	! 🚫
GY6,35	max 100W/12V	HSGS		C	80	III				01959018	! 🚫




! For 12 V AC lamp supply.

🔌 Luminaire supplied complete with 4 meters of H07RN8-F 2x1.5 mm² cable.



UWF 10


Lampholder	W	Ilcos	*K	Optic	Colour	Class	Wiring	EEL =	Cosp ≥ 0,9	Code	Notes
GU5,3	max 50W/12V	HRGS			80	III				01961018	! 🚫
GY6,35	max 100W/12V	HSGS		C	80	III				01962018	! 🚫



! For 12 V AC lamp supply.

■ Minimum order 12 pcs. or multiple quantities thereof.


ACCESSORIES

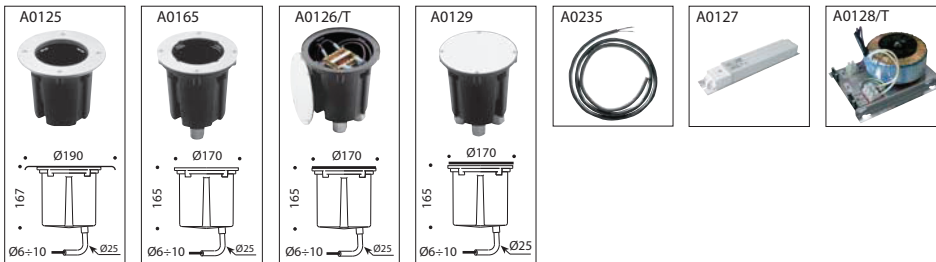

Code	Denomination	Description
14421018	A0125	Floor / wall recessing accessory for UWF 10 luminaire.
14002289	A0165	Accessory for recessed installations into plastic sheet wall.
14096120	A0126/T	CLASS II IP67 box complete with 1x100VA 220-240/12V transformer for ground and concrete recessed installation (non submersible above ground use only).
14422018	A0129	CLASS II IP67 wiring box for ground and wall recessed installation (non submersible above ground use only).
14018320	A0235	H07RN8-F 2x1,5 mm ² rubber cable supplied and sold in 1 meter units.
14423998	A0127	1x100VA 220-240/12 V safety transformer. Not suitable for installing within A0126 accessory.
14094920	A0128/T	1x350VA 240/12 V safety transformer. Not suitable for installing within A0126 accessory.

80 CLASS III IP 68 5 m IK 08 6J KG Max 0,4 kg 0,5m PG11 Ø6÷Ø10 2x1,5mm²

UWF 10

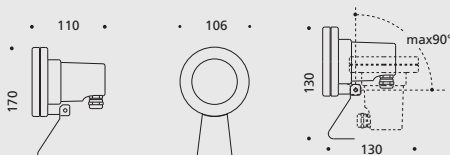

UWF 10

LED		GU5,3	4,5W
HRGS		GU5,3	Max 50W DICR
HSGS		GY6,35	Max 100W HALO 12V