

Mini / EvoSIGNAL

**Mini TwinFLASH Combi 24VAC/DC RD**

|           |                |
|-----------|----------------|
| Part No.: | 460.120.75     |
| Series:   | EvoSIGNAL Mini |

**MECHANICAL DATA**

|                              |                             |
|------------------------------|-----------------------------|
| Height                       | 85 mm                       |
| Diameter                     | 62 mm                       |
| Materials                    | PC<br>PC/ABS                |
| Dome colour                  | Red                         |
| Housing colour               | Grey                        |
| Protection category          | IP66                        |
| Connection                   | Push-in terminal            |
| cross-sectional area minimum | 0,25mm <sup>2</sup> / 24AWG |
| cross-sectional area maximum | 1,50mm <sup>2</sup> / 16AWG |
| Type of fixing               | Wall mounting               |
| Service life optical         | 50,000 h minimum            |
| Acoustic service life        | 5,000 h minimum             |
| Working temperature minimum  | -30°C                       |
| Working temperature maximum  | +60°C                       |
| UL Type Rating               | Type 12                     |
| Weight with packaging        | 100 g                       |
| Product weight               | 78 g                        |

**ELECTRICAL DATA**

|                             |                    |
|-----------------------------|--------------------|
| Operating voltage           | 24V                |
| Operating voltage type      | AC/DC              |
| Operating voltage type      | 50Hz               |
| Operating voltage tolerance | +/- 10%            |
| Rated operational voltage   | 24 VDC             |
| Rated operational current   | 96 mA              |
| Rated inrush current        | 3000 mA            |
| Protection class            | Protection class 2 |
| Pollution degree            | 3                  |
| Overvoltage category        | III                |

**OPTICAL DATA**

|                      |                  |
|----------------------|------------------|
| Light source         | LED              |
| Light colour         | Red              |
| Optical signal image | EVS<br>TwinFlash |
| Flash frequency      | 1 Hz             |

**ACUSTICAL DATA**

|                               |             |
|-------------------------------|-------------|
| Volume/dB(max) at 1m distance | 95,0 dB (A) |
|-------------------------------|-------------|




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Mini / EvoSIGNAL

**Mini TwinFLASH Combi 24VAC/DC RD**

|                       |                               |
|-----------------------|-------------------------------|
| Acoustic signal image | Continuous tone<br>Pulse tone |
| Number of tones       | 2 tone                        |
| Audio frequency       | 4000 Hz                       |

**DRAWING**

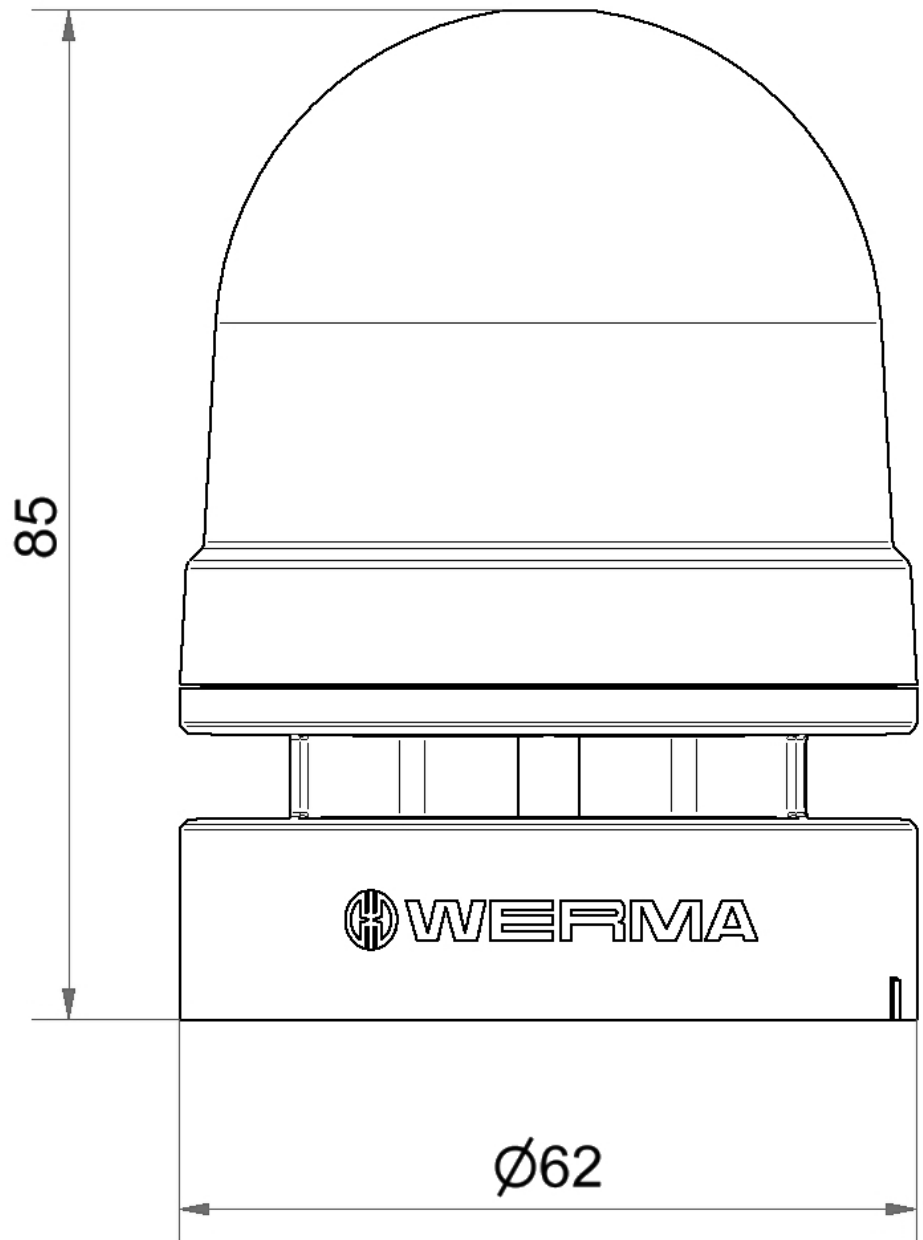

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.