


EX-KRM 50/40

Ex-reduction adaptor, polyamide, M50-M40



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

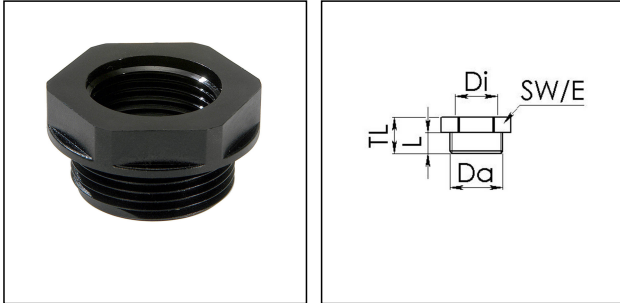

| | |
|--------------------------|---|
| Material | Polyamide, fibre reinforced |
| Temp. range min | -40 °C |
| Temp. range max | 75 °C |
| Protection class | IP66 / IP68 (5 bar 30 min) |
| Marking | II 2 D Ex tb IIIC Db, II 2 G Ex eb IIC Gb |
| Approval | PTB 04 ATEX 1040 X, IECEx PTB 16.0026X |
| Thread type outer | M |
| Ø outer thread | 50 |
| Lead outer | 1,5 |
| Length screw-in thread L | 14 mm |
| Thread type inner | M |
| Ø inner thread | 40 |
| Lead inner | 1,5 |
| Key width SW | 55 mm |
| Collar diameter (E) | 61 mm |
| Total length TL | 21 mm |
| Form | B |
| Product Color | RAL 9005 |
| Order no. RAL 9005 | 10064735 |
| Type | EX-KRM 50/40 |
| Packing unit | 5 |
| ETIM-Classification | EC000938 |

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Recommended accessories

EMUG 50

10061786

10.01.2020

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

 +49-4191-508-0 ·  +49-4191-508-209

contact@wiska.de · www.wiska.com



Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com