


## busbar adapter 250 A, 3-pole (32073000B)

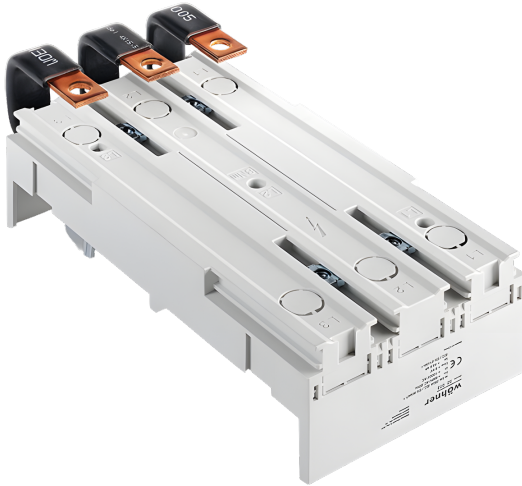

The picture may show a similar product.

### Description

Part No.: **32073 000B**

EQUES 60Classic

busbar adapter 250 A, 3-pole

with laminated copper (bottom)

140 x 260

phase distance 35 mm

connection to the system bottom

for ABB T3, T4, XT3, XT4 / Eaton NZM2 / Schneider Electric NSX 250 / Siemens 3VA12, 3VA20, 3VA21, 3VA22

for busbars 12, 15, 20, 25, 30 x 5, 10 and section busbars

### System

60Classic

**Product group** 05

**Subgroup** 36

**pack size** 1

**EAN** 4021267320737

ECLASS 14.0 27370304  
ETIM 5.0 EC001531  
ETIM 8.0 EC001531  
ETIM 10.0 EC001531

## Approvals

### Standards

IEC 61439-1:2020

CCC approval: no certification required

## Technical data

### Details IEC

#### Standards

IEC 61439-1:2020

#### Electrical data IEC

rated current (IEC): 250 A

rated voltage (IEC) AC: 690 V

rated isolation voltage  $U_i$  AC: 800 V

rated surge voltage  $U_{imp}$ : 6 kV

power dissipation of the article:

The power dissipation at a typical load of 80 % results to 10.6 W.

(The power dissipation at full load would be 16.5 W.)

#### Supplementary data IEC

The following values have been verified with tests under certain conditions. Please ask Wöhner for this conditions before designing your panel.

min. permitted operation temperature -40°C

**Mechanical data**

W x H x D: 105 x 200 x 35

weight: 75.0 kg/100

poles: 3-pole

for busbars: 12, 15, 20, 25, 30 x 5, 10 and section busbars

**Material properties**

halogen-free: Yes

## Application notes

There must be a clearance of at least 10 mm above the article to remove it from the busbar system.  
the short-circuit capacity of the combination of adapter and MCCB depends on the MCCB

<https://pim.woehner.de/EN/EN/1000213419>