



Cod.1098/454

40 CH, S+265 NVR, 12M, 4HDD slot

TECHNICAL FEATURES

HD Input

- S+265/H.265/H.264 video formats
- Connectable to the third-party network cameras
- Up to 40 IP cameras can be connected
- Supports live view, storage, and playback of the connected camera at up to 12MP resolution

HD Output

- HDMI and VGA simultaneous output
- HDMI Video output at up to 4K (3840 × 2160) resolution

HD Storage

- 4 SATA interfaces connectable for recording and backup, up to 10TB for each HDD
- S+265 compression

HD Transmission

- 2 self-adaptive 10/100/1000 Mbps network interfaces

Various Applications


- recording, playing back, and backing up of VCA alarms can be realized
- VCA detection alarm is supported
- Smart search for the selected area in the video and smart playback to improve the playback efficiency
- Web6 supports plug-in-free browsing and can preview videos on all browsers




Input	
Video Input	40-ch
Max Resolution	12MP
Two-way Audio Input	1-ch, 3.5mm
Bandwidth	Income 320Mbps; Outgoing 320Mbps
Output	
HDMI/VGA Output	HDMI 1-ch, 3840×2160, 2560×1600, 2560×1440, 1920×1080, 1440×900, 1366×768, 1280×800, 1280×720, 1024×768, 800×600
	VGA 1-ch, 1920×1080, 1440×900, 1366×768, 1280×800, 1280×720, 1024×768, 800×600
Screen Split	1/3/4/6/8/9/10/13/16/20A/20B/25/32/36/40/64
Audio Output	1 RCA
Decoding	
Decoding Format	S+265/H.265/H.264
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Preview Capability	3 12MP, 4 8MP, 4 6MP, 5 5MP, 8 4MP, 9 3MP, 16 1080P, 32 720P, 40 4CIF
Synchronous Playback	3 12MP, 4 8MP, 4 6MP, 5 5MP, 8 4MP, 9 3MP, 16 1080P, 16 720P
Records Encryption	Yes
Hard Disk	
SATA	4 SATA interfaces for 4 HDDs
Capacity	Up to 10TB for each HDD
eSATA Interface	N/A
Array Type	JBOD, RAID0/1/5/6/10
External Interface	
Network Interface	2 RJ45 self-adaptive 10/100/1000 Mbps network interfaces
USB Interface	1 USB 2.0, 1 USB 3.0
Serial Interface	1 RS-485, 1 RS-232
Alarm In/Out	16/4
Network	
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, IGMP, QoS, IPV4, IPV6, Multicast, ARP, UDP, SNMP, SSL, Telnet, RTMP, NFS
System Compatibility	ONVIF (PROFILE S/T/G), SDK, P2P
General	
Web Version	WEB6
Language	Simple Chinese, Traditional Chinese, English, Spanish, Korean, Italian, Turkish, Russian, Thai, French, Polish, Dutch, Hebraism, Arabic, Vietnamese
Operating Conditions	-10 ~ 55 , 10%~90% RH
Power Supply	DC12V 5A
Redundant Power	N/A
Consumption (without HDD)	40W (without HDD)
Chassis	1.5U
Dimensions	75×347×440mm,
Weight (without HDD)	3.8Kg

1098/454 40 CH, S+265 NVR, 12M, 4HDD slot

DIMENSIONS (mm)

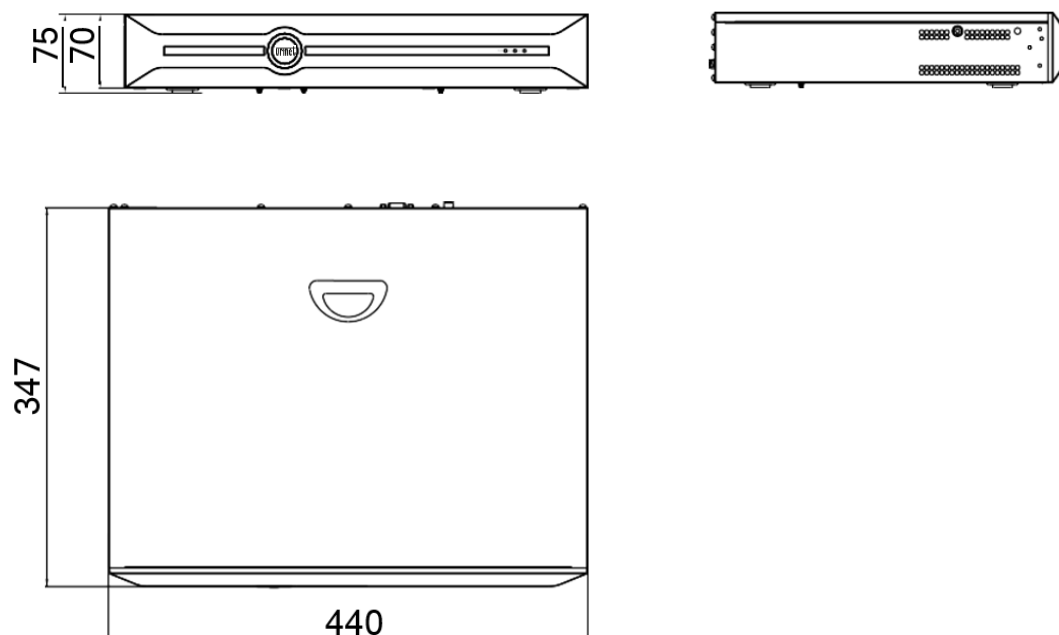

Physical Interfaces

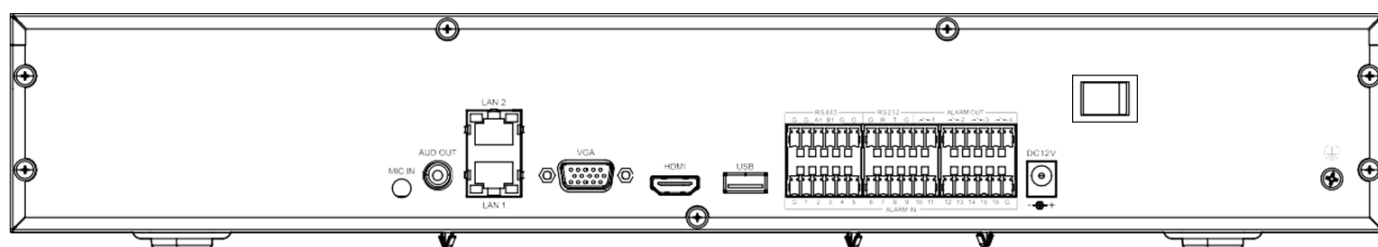

Technical specifications are subject to changes without notice.

Urmet S.p.A. | Via Bologna, 188/C | 10154 TORINO (ITALY)

T +39 011.24.00.000

info@urmet.com | **urmet.com**

CUSTOMER SERVICE +39 011.23.39.810