



ADVANTAGES

- ✓ as supplementary or main heating
- ✓ can be integrated into PV systems
- ✓ simple installation and maintenance-free
- ✓ 20 minutes of electricity for one hour of heat
- ✓ rustproof due to full galvanisation
- ✓ absolutely noiseless and odourless
- ✓ no dust smouldering
- ✓ precise control functions
- ✓ practical accessories

Thermotec AG
Arnsdorf 26
02894 Vierkirchen
Deutschland

Telefon: +49(0)3 58 27 78 93 30
E-Mail: info@thermotec-ag.de
Web: www.thermotec.ag

MA005 v.1

 **THERMOTEC.AG**
E-WÄRME CLEVER GENUTZT



 **AeroFlow®**

Warmth - when it matters

PANEL STORAGE HEATERS


E-heat when it counts

HIGH SAFETY

due to individual segment shut-off

SOFT HEAT

✓ Tiled stove principle with actively heated fireclay core

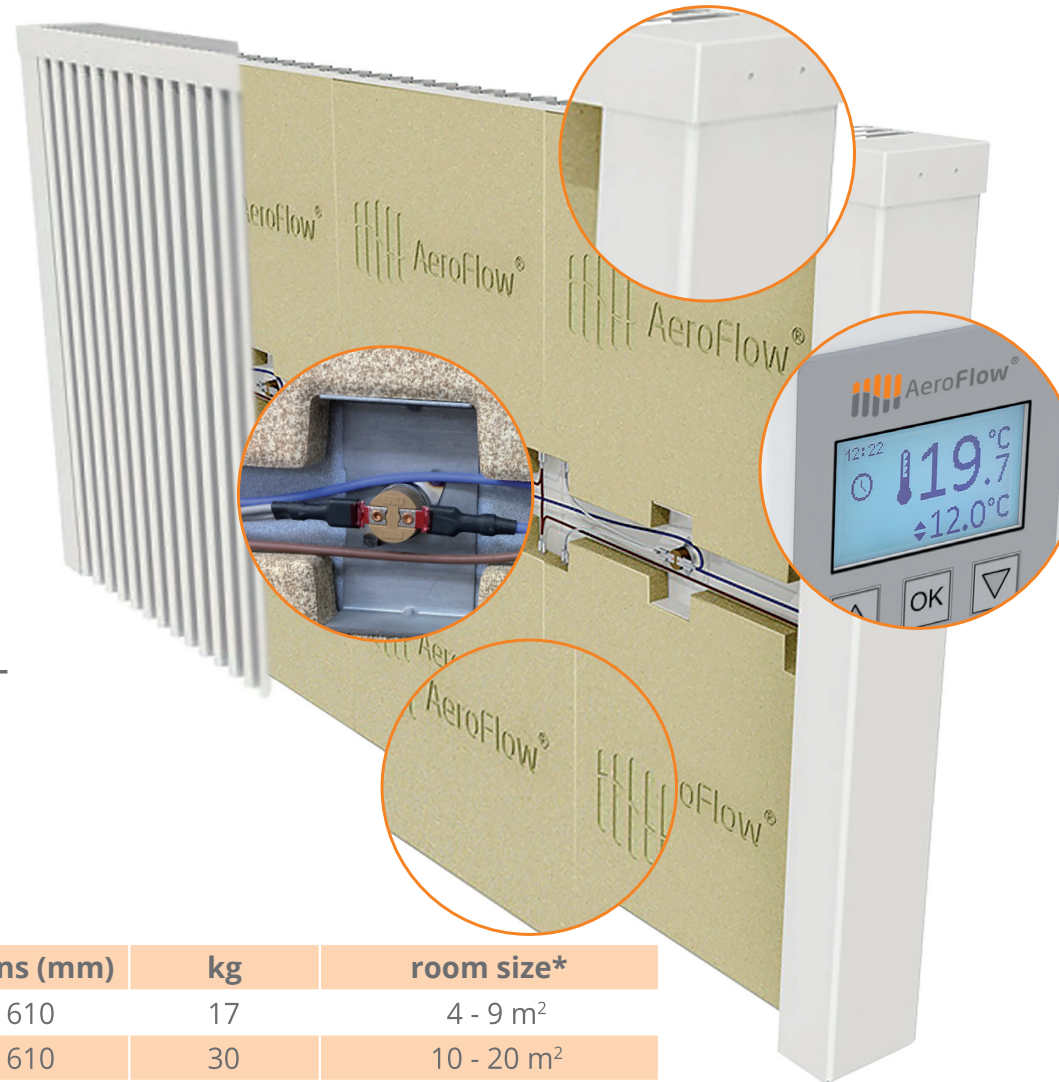

QUALITY PROMISE

- ✓ 30 years warranty
- ✓ Hot dip galvanised steel
- ✓ high quality powder coating

UNIQUE CONTROL

one control, three options

- ✓ manual control
- ✓ programming on the unit
- ✓ App control

AVAILABLE IN MANY SIZES

Product	Watt	Dimensions (mm)	kg	room size*
MINI	650	380 x 610	17	4 - 9 m ²
COMPACT	1300	680 x 610	30	10 - 20 m ²
MIDI	1950	980 x 610	42	15 - 30 m ²
MAXI	2450	1280 x 610	55	20 - 40 m ²
SLIM TALL	1600	380 x 1250	34	8 - 16 m ²
SLIM	1200	980 x 325	24	8 - 16 m ²
SLIM	1600	1280 x 325	30	10 - 20 m ²
SLIM	2000	1580 x 325	36	12 - 25 m ²

* average insulation and normal room height



**MADE
IN
GERMANY**