


fastening module (01605)

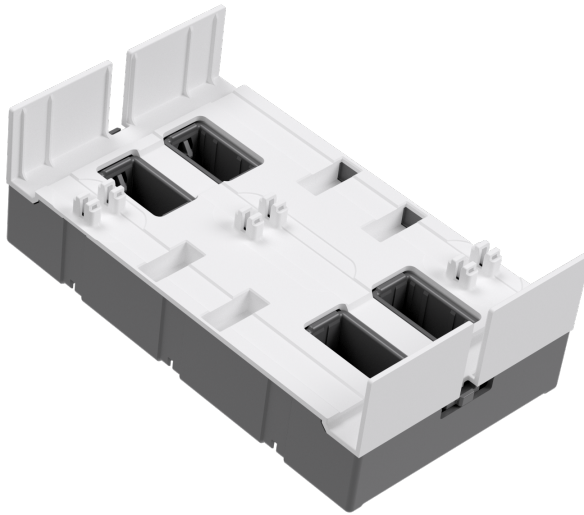

The picture may show a similar product.

Description

Part No.: **01605 000A**

CRITO[®] CrossBoard

fastening module

at rear feeding

no electrical connection

for CrossBoard 250 A

System

CrossBoard[®] 125A / 250A

Product group 07

Subgroup 39

pack size 1

EAN 4021267016050

ECLASS 6.1 27370390
ECLASS 7.1 27370390
ETIM 4.0 EC002498
ETIM 5.0 EC002498

Approvals

Standards

IEC 61439-1:2020
UL 508

Approvals

UL



for UL feeder circuits >250V

type number: CR-B-95-A0

UL file: E123577, UL category (for USA): NMTR <https://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR7 <https://www.ul.com>

CCC approval: no certification required

Technical data

Details IEC

Standards

IEC 61439-1:2020

Electrical data IEC

rated voltage (IEC) AC: 690 V

rated isolation voltage U_i AC: 800 V

rated surge voltage U_{imp} : 6 kV

power dissipation of the article:

The power dissipation at a typical load of 80 % results to 0.0 W.

(The power dissipation at full load would be 0.0 W.)

Supplementary data IEC

The following values have been verified with tests under certain conditions. Please ask Wöhner for this conditions before designing your panel.

max. permitted voltage (IEC) AC: 800 V

max. permitted voltage (IEC) DC: 800 V

Details UL

Standards

UL 508

for UL feeder circuits >250V

suitable for field-installed conductors

Mechanical data

W x H x D: 95 x 169 x 57

weight: 27.0 kg/100

Application notes

for UL feeder circuits >250V

<https://pim.woehner.de/EN/INT/1000256481>