


EX-KRM 20/16

Ex-reduction adaptor, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

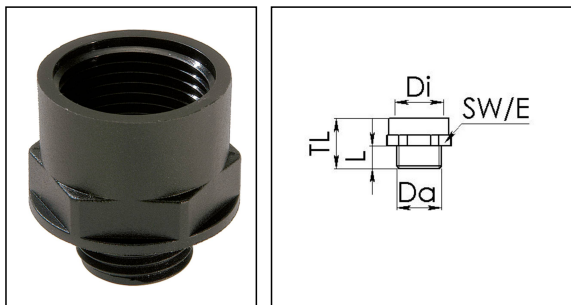

| | |
|--------------------------|--|
| Material | Polyamide, fibre reinforced |
| Temp. range min | -20 °C |
| Temp. range max | 70 °C |
| Protection class | IP 66 |
| Marking | II 2 G Ex e II, II 2 D Ex tD A21 IP 66 |
| Approval | PTB 04 ATEX 1040 X |
| Thread type outer | M |
| Ø outer thread | 20 |
| Lead outer | 1,5 |
| Length screw-in thread L | 9 mm |
| Thread type inner | M |
| Ø inner thread | 16 |
| Lead inner | 1,5 |
| Length internal thread | 15,5 mm |
| Key width SW | 24 mm |
| Collar diameter (E) | 28 mm |
| Total length TL | 27 mm |
| Form | A |
| Product Color | RAL 9005 |
| Order no. RAL 9005 | 10064722 |
| Type | EX-KRM 20/16 |
| Packing unit | 100 |
| ETIM-Classification | EC000938 |

Recommended accessories

EMUG 20

10061782

23.06.2016

