


EX-KRM 32/25

Ex-reduction adaptor, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

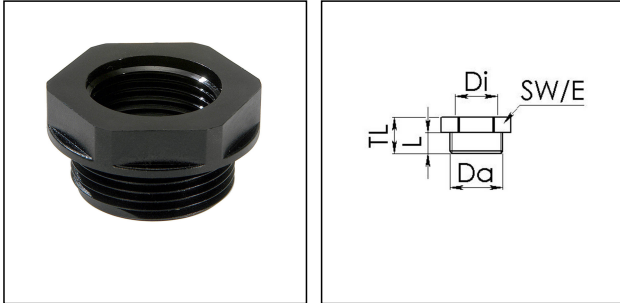

Material	Polyamide, fibre reinforced
Temp. range min	-20 °C
Temp. range max	70 °C
Protection class	IP 66
Marking	II 2 G Ex e II, II 2 D Ex tD A21 IP 66
Approval	PTB 04 ATEX 1040 X
Thread type outer	M
Ø outer thread	32
Lead outer	1,5
Length screw-in thread L	12 mm
Thread type inner	M
Ø inner thread	25
Lead inner	1,5
Key width SW	36 mm
Collar diameter (E)	41 mm
Total length TL	19 mm
Form	B
Product Color	RAL 9005
Order no. RAL 9005	10064728
Type	EX-KRM 32/25
Packing unit	50
ETIM-Classification	EC000938

Recommended accessories

EMUG 32

10061784

23.06.2016

