


## EX-KEM 40/50

Ex-enlargement adaptor, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

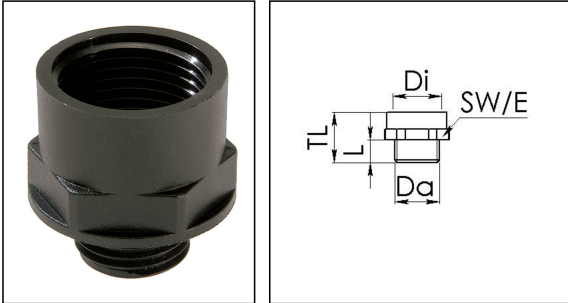

Material	Polyamide, fibre reinforced
Temp. range min	-20 °C
Temp. range max	70 °C
Protection class	IP 66
Marking	II 2 G Ex e II, II 2 D Ex tD A21 IP 66
Approval	PTB 04 ATEX 1040 X
Thread type outer	M
Lead outer	1,5
Length screw-in thread L	12 mm
Thread type inner	M
Ø inner thread	50
Lead inner	1,5
Length internal thread	15,5 mm
Key width SW	55 mm
Collar diameter (E)	61 mm
Total length TL	30 mm
Form	A
Order no. RAL 9005	10064746
Type	EX-KEM 40/50
Packing unit	25
ETIM-Classification	EC000938

Recommended accessories

23.06.2016

